



Transport Lighting, Safety Lighting & Accessories

Expertly Designed and Precision Manufactured

Welcome to HELLA New Zealand's Automotive Catalogue

A comprehensive range of innovative road transport lighting, safety lighting and accessories for the transport sector.

Since the launch of our first LED automotive signal lamps in 1990, HELLA design and commitment to excellence continues to set new standards. HELLA's innovative solutions have become the benchmark for the road transport industry with lamps to suit the most demanding environmental conditions.

When you select a HELLA LED based product you know that functional safety, quality and long term product durability are guaranteed.

You have our promise that as a local designer and developer, manufacturer and service provider we will stand behind our products.



HELLA-New Zealand Limited

81-83 Ben Lomond Crescent Pakuranga, Auckland, New Zealand PO Box 51-427, Auckland 2140 New Zealand

Head Office:

Tel: +64 (0) 9 577 0000

Sales/Customer Service:

Tel: 09 577 0366 Fax: 09 576 8202 nzsales@hella.co.nz

www.hella.co.nz

CONTENTS



Page 14



Page 122



Page 204



Page 342

INTRODUCTION	2-13	
MARKER & SIGNAL	14-87	
LED SAFETY DAYLIGHTS™	88-101	
HEADLAMPS & INSERTS	102-121	
FOG & DRIVING LAMPS	122-151	
WORK LAMPS	152-181	
EMERGENCY LIGHTING & SIGNAL WARNING LAMPS	182-203	
INTERIOR/EXTERIOR LIGHTING	204-231	
RELAYS & FLASHERS	232-251	
ACCESSORIES	252-325	
HELLA WORKSHOP	326-339	
HELLA BEAMSETTERS	340-341	
AUTOMOTIVE BULBS	342-373	
3RD EDITION ADR REFERENCE GUIDE	374-386	
INDEX BY PART NUMBER	387-396	



HELLA WORLDWIDEA TRULY GLOBAL BUSINESS









HELLA GmbH & Co. KGaA was founded in Lippstadt, Germany in 1899 to develop and manufacture lighting and electronic components and systems for the automotive industry. The company has grown to be one of the top forty automotive suppliers in the world, and is listed as one of the 100 largest German industrial companies.

Represented in some 35 countries, HELLA employs over 38,000 staff across 125 design, manufacturing and sales facilities. HELLA continues to grow with almost 7,000 people working in research and development. Due to entrepreneurial boldness and foresight, developing innovative products and processes, a committed workforce and by a customer-focused approach, HELLA is one of the most important innovation drivers in the market.

Original equipment supplier to over 165 world leading vehicle manufacturers...

Today HELLA is a trusted supplier and development partner of many of the world's leading manufacturers of passenger cars, commercial vehicles and special purpose vehicles.



Volkswagen Audi, BMW Mercedes Benz Aston Martin Porsche



Iveco, Volvo Kenworth Scania Daimler



Caterpillar Komatsu John Deere Manitou



lveco Man Scania

HELLA-New Zealand Limited

For nearly 45 years HELLA New Zealand has adopted the entrepreneurial spirit of its founders and developed into a LED lighting technology company with comprehensive in-house design and manufacturing capabilities.

HELLA-New Zealand Limited was founded in 1973 to manufacture, market and distribute automotive products within New Zealand.

Today the company designs and manufactures innovative lighting products across two sites in Auckland and Waihi for the global commercial transport, automotive and marine industries. Dedicated in-house product, electronic and optical design engineers utilise cutting edge materials to develop innovative, ultra-reliable and energy efficient products using the latest LED (Light Emitting Diode) technology.

The Auckland facilities have been occupied since 1980 covering some 7500m² and providing state of the art highly automated manufacturing capabilities. The Waihi electronics plant, purpose built in 2007, boasts the latest automated assembly systems that place 70,000 LEDs daily onto circuit boards. In 2004 HELLA New Zealand became the global headquarters for Hella marine further strengthening HELLA's presence in New Zealand.

HELLA New Zealand is a respected partner and supplier of choice for automotive manufacturers and commercial transport fleets in New Zealand and around the world.







HELLA's comprehensive in-house design and manufacturing capabilities.

TESTED PROVEN TRUSTED

HELLA New Zealand strives to provide world-class products and services that contribute to the safety of the automotive and transport industry through enhanced vision and visibility.

HELLA is a leading edge designer and manufacturer of energy efficient, durable lighting products that always meet customer expectations for innovative design and quality.

Andrew Mills - Managing Director, HELLA New Zealand



Customer Service

HELLA's dedicated customer services team provide 'best fit' solutions based on sound professional knowledge and experience. With access to a wide global database within the HELLA Group, Customer Service is the recommended first stop for customer enquiries.



SUPERIOR MATERIAL CHOICE QUALITY ASSURANCE

HELLA products are manufactured using high quality, corrosion resistant materials that have been tested and proven to be ultra durable in extreme environments.



Grilamid® - Superior Lens Material

- → Toughness against impact
- → Resistant to chemical damage from diesel/petrol and washing fluids
- → UV resistance from harsh sunlight
- → Will not fade or embrittle

Superior Lens and Optic Materials

The majority of HELLA DuraLED® and EuroLED® lamps are produced using a specially formulated enhanced high impact acrylic, that has superior resistance to most commonly used wash and cleaning liquids.

HELLA recommends these hermetically sealed marker and signal lamps for all commercial transport applications to provide an ultra long term and environmentally friendly lighting solution.

In 2009 HELLA took the design and development of ultra durable lighting solutions to a new level by specifying the Swiss made high-tech material Grilamid® for selected applications.



Grilamid® is a revolutionary optical grade Polyamide which offers an unbeatable combination

of properties. Because of these qualities Grilamid® has become the specified material of choice for many of HELLA's valued commercial customers and end users.

Long Term Transparency

Grilamid® will not lose its lustre or embrittle over time but will remain clear, transparent and impact tough for the life of the product. Grilamid® retains its superior optical performance without discolouration.

Cleaning Products

Grilamid® is highly resistant to chemicals and sterilisation equipment commonly used in the transport industry.

Grilamid® Retains its Toughness

LED truck and trailer lamps are frequently exposed to mechanical impacts by stones, tree branches and general shocks. Uncoated Polycarbonate will lose its impact resistance over time

Tests prove and market feedback confirms the superior strength and toughness of Grilamid® is not compromised even through the prolonged effects of weathering and UV exposure.

Superior Strength and Toughness







Grilamid® subjected to the same conditions.

UV Resistance



New Zealand and Australia are exposed to some of the highest and harshest UV radiation in the

world. Most consumers will have experienced products made from plastic materials that deteriorate, fade and often become brittle very quickly when exposed to the sun.

Most of the LED lighting equipment we supply is likely to be continually exposed to this harsh environment. HELLA New Zealand only manufactures products from materials which are highly resistant to UV deterioration.

HELLA New Zealand LED lamps are designed to withstand our harsh environmental conditions and will tolerate long term exposure to high UV levels without fading or embrittlement.

Easy Refurbishment of Acrylic and Grilamid® Lenses

HELLA LED lamps manufactured with enhanced impact acrylic and Grilamid® are a truly long-term investment.

Both these materials can be refurbished to near new condition by polishing out fine scratches and road grime.




As illustrated using a DuraLED® lamp with many years of active high mileage road use can be refurbished to pristine near new condition.

Thermally Conductive Polymer

Revolutionary plastic ceramic materials, with outstanding thermal performance, open up a world of possibilities that was never thought to be achievable only a few years ago.

A lamp housing made from thermally conductive plastic works much the same as a metal housing. The innovative ceramic based plastic transfers the heat generated by the LEDs and drive electronics to the outside of the lamp body, thereby lowering the internal thermal stress on the components. This in turn ensures a long service life with minimal degradation of the LEDs.


The replacement of metal based housing heat-sinks with thermally conductive plastic not only opens a myriad of design options, but also means complete corrosion resistance. This is especially important in demanding environmental conditions where lights are constantly exposed to the elements and are sometimes temporarily submerged.

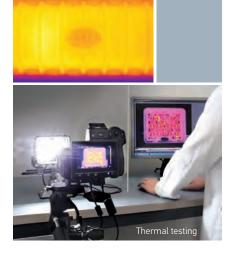


Coating System Technology

HELLA have developed superior coating systems for the latest heavy duty aluminium housings. Corosafe and NanoSafe technology combine a series of sophisticated coating methods that ensure a high level of corrosion resistance and improved protection against impact. A non-stick surface coating makes for easy cleaning.

For more information about NanoSafe refer to page 172.



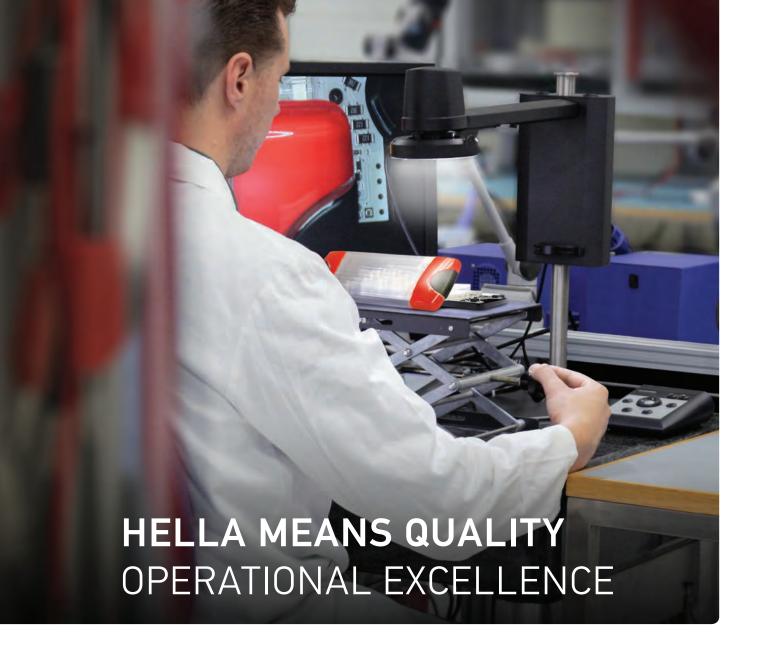

At HELLA New Zealand we're passionate about quality, down to the smallest detail.

Our ultimate goal is to achieve zero failures and this uncompromising approach means that each of our products will continue to deliver superior performance year after year.

Operational excellence is what we pride ourselves on ensuring each individual product is designed and manufactured to industry best practises.

Andrew Mills
Managing Director, HELLA New Zealand

HELLA New Zealand products are developed to the latest international standards and best practice principles, ensuring designs that are ahead of the competition in terms of durability, performance, and efficiency.

Combining superior design and operational excellence, HELLA New Zealand's Fit and Forget philosophy means that our customers can rest easy when they choose our products knowing they are getting the very best that will not let them down.

Taking Quality to Extremes

Before a new HELLA design is passed for production and sale, it has to pass stringent endurance tests. Every HELLA product is subjected to countless hours of rigorous testing where a range of extreme conditions are simulated.

In use, products must perform reliably at both high and low temperatures, as well as high levels of humidity. To ensure they withstand these challenges we use climate chambers where products are subjected to temperatures of -40°C to 60°C, as well as rapid temperature fluctuations.

Moisture ingress is one of the biggest contributors to LED lighting product failure, therefore correct sealing of LED lamps is essential in ensuring a long lifespan of the product. HELLA have developed cutting edge automated robotic gluing systems that ensure consistent gluing and sealing.

Vibrations and jolts are part of everyday life for vehicle parts and can be a major cause of failure. Our punishing vibration tests subject products to constant vibration across a range of frequencies in all orientations. Impact testing is also used to ensure mechanical shock resistance.

International Standards

HELLA continually strives for improvements in daily operations in order to ensure each individual product is made to the highest standards.


HELLA New Zealand is certified to the international quality and environmental standards ISO 9001 and ISO 14001 for the design, manufacture and sale of automotive lighting and signalling equipment, marine navigation lighting, general lighting, LED based lighting and associated electronic control units, opto-electronic based printed circuit board assemblies, optical products and plastic components.










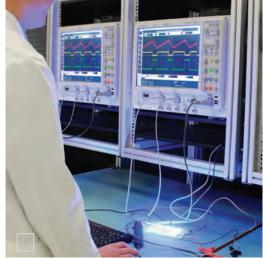



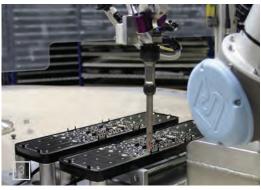



1: Electronic testing.
2: Simulating extreme environmental conditions.
3: Automated gluing process.
4: Vibration testing.

FIT AND FORGET BY DESIGN

Fit and Forget by Design is not just a marketing slogan, it is a philosophy adopted by our design team in 1998 when HELLA New Zealand designed our first DuraLED® signal lamp for the commercial transport sector.

To create lamps that will function faultlessly for the vehicle life and beyond requires dedication to excellence and the

most rigorous, verified test regime. Extensive consultation with our most discerning industry partners was conducted, followed by months of field tests before the first DuraLED® was ever sold to a customer.

Over two decades the same team of dedicated perfectionists have continuously improved the latest designs from ongoing research and market experience.

Material selection, LEDs, optics, drive electronic, circuit protection, design of the sealing geometries, rigidity versus deliberate flexibility of the mounting system all work in harmony to create a product of truly lasting value and safe operation.

Fit and Forget by Design is your peace of mind of purchasing a product which is designed to stand the test of time, without compromise.





Designed and tested for guaranteed reliability and performance.





HELLA New Zealand WarrantyStanding Behind Our Product

Warranty

The "HELLA" trademark shall be synonymous with best in class product and service excellence. When you purchase a HELLA product, you have the complete peace of mind of knowing that your product is covered by HELLA's Comprehensive Warranty covering faults in materials, components or workmanship.

- → All DuraLED® branded automotive LED based lighting products supplied by HELLA New Zealand carry a Lifetime* Warranty.
- All other HELLA branded LED based automotive lighting products carry a Five-Year Warranty unless otherwise specified.
- Micro Light Bars MLB Series 3 Years Warranty
- → Inspection lamps 2 years Warranty
- → All other products carry a One-Year Warranty
- * Lifetime means the economic life of the vehicle these products were first installed on.

The majority of the LED based lighting products in this catalogue were designed and manufactured in New Zealand. Ever since HELLA New Zealand started designing LED transport lighting in 1990 we have adopted a no compromise Fit and Forget by Design philosophy. This philosophy as well as our dedication to on-going research and adoption of new technology ensures that our products continue to set the bench mark in performance, durability and reliability.

In the unlikely event that you should experience a confirmed warranty related problem with a HELLA product, our commitment to your satisfaction ensures that HELLA will, at our discretion, either repair or replace the product or refund the purchase price.

Warranty services may be obtained by returning the product within the warranty period to the HELLA Dealer where the product was originally purchased.

This warranty is in addition to and does not preclude any other rights or remedies available to the consumer under the Consumer Guarantees Act.

This warranty does not cover:

Claim/s as a result of normal wear and tear, any modifications, alterations, non-compliance of assembly, service and operating instructions and/or any unfit or improper use.

General Disclaimer

The illustrations, information and specifications presented and referred to in this catalogue were correct at the date of printing. However HELLA New Zealand reserves the right, subject to all applicable laws, at any time, at its discretion and without notice to discontinue or change the specifications or design of any product referred to herein.

© 2018 HELLA-New Zealand Limited.

The illustrations, information and specifications contained within this catalogue remain the property of HELLA-New Zealand Limited. Any unauthorised copying or distribution of this material outside the catalogue, is prohibited without prior approval. Designed and printed in New Zealand.



HELLA ONLINE TAKE ADVANTAGE OF ONLINE SERVICES

The HELLA Online Services website is the ultimate resource for all things HELLA

www.hella.com/online-services/en/

- → Comparison Tools
- → Configurator Tools
- → Product Information
- → Calculators
- → Microsites
- → Catalogues
- → Mobile Apps
- → Media Database
- → Social Media









www.hella.co.nz



www.hellamarine.com



www.safetydaylights.com



www.facebook.com/HELLA.NZ



http://goo.gl/uVF4Jy



HELLA CONTACT MAN

A TWO DAY INTENSIVE TRAINING COURSE

The HELLA Contact Man Course is designed to provide insight into the world of HELLA New Zealand. Come experience HELLA technology.



WHO SHOULD ATTEND?

- → Sales & Product Managers
- → Counter Sales Staff
- → Warehouse Staff
- → Sales Representatives
- → Warehouse Managers
- → Supervisors

WHAT WILL I LEARN?

- → Technological advances in automotive lighting
- → HELLA design, manufacturing and testing processes
- → Key sales points of HELLA LED products

HOW MUCH DOES IT COST?

- HELLA offers this course free of charge
- Overnight accommodation is provided by HELLA for 'out of town' participants
- → Lunch and dinner provided

As a pioneer in LED lighting solutions HELLA's experienced staff are happy to share their knowledge and train people in the automotive industry.

The training course is a comprehensive 2-day course focused on HELLA New Zealand's product development, design, manufacture, and testing procedures. Combining a seminar style teaching method and complete factory tour, attendees are given an overview of HELLA technology over the span of the course.

Each participant will receive a detailed course manual, giveaways, HELLA information folder and a certificate for completing the course. HELLA provides lunch for two days and dinner on day 1, plus overnight accommodation and breakfast for 'out of town' participants.

Your company provides travel to and from the course.

The course is constantly kept up to date with new products, technological advances and is run by our 2 experienced course facilitators with over 55 years HELLA experience between them.

HELLA is dedicated to enhancing industry knowledge, and offers this course free of charge.

HELLA can tailor the Contact Man Training Course to suit individual customer requirements.







For more information go to www.hella.co.nz or email contactman@hella.co.nz

ELECTROMAGNETIC INTERFERENCE

(EMI)

HELLA LED lamps are electronic devices. The electrical circuits contain components that have been optimised to suppress possible interference, both emission as well as susceptibility.

Electromagnetic interference (EMI) is something you should know about. If you're not familiar with "EMI," the term refers to a disturbance that affects an electrical circuit. If you've ever experienced reception issues with your AM/FM radio when your cell phone rings (or vice versa), that's a perfect example of a problem caused by EMI.



Reception issues with your AM/FM radio caused by EMI.

Lights can both cause and be the victim of EMI issues in your vehicle. For this reason, it is important to have a basic understanding of EMI and look for lights that have been adequately tested.

There are five main types of EMI that you should be aware of:

- → Radiated Emissions Electromagnetic noise emitted by a light through the air that can interfere with other electronics (e.g. Cell phones, radios, etc.).
- → Conducted Emissions Electromagnetic noise conducted down a power line in a vehicle which can interfere with other electronic components on the vehicle.
- → Radiated Immunity The tolerance of a light to inbound electromagnetic noise in the atmosphere. Any broadcast signal (cell phone, radio tower, non-compliant electronics, etc.) can interfere with a light if it is not properly designed.
- → Conducted Immunity The tolerance of a light to inbound electromagnetic noise conducted on vehicle power lines.
- → Electrostatic Discharge This phenomenon can damage any electrical component – lights included.

Car manufacturers specify the level or standard that they want to have their products exceed, as they do not wish for individual components to affect each other once they are combined in a vehicle. An example could be the alternator noise coming through the radio.

RCM New Zealand Legislation

HELLA lighting products are designed and tested to reduce the possible risk of electromagnetic interference, both emissions as well as susceptibility, to limits defined in international standards and regulations.



As prescribed by New Zealand legislation, certain electronic products sold in New Zealand

must be labelled with the RCM mark.

HELLA products are designed, tested and labelled to meet the requirements of this legislation.

Lamps marketed as RFCommSafe™ are designed to go well beyond the requirements of these international standards and regulations.

Refer to page 157 for more information about RFCommSafe™ technology.

TECHNICAL PRODUCT LOGOS

Your guide to understanding the technical product logos found throughout this catalogue.



DuraLED® Lifetime Warranty HELLA New Zealand's industry leading guarantee for quality and reliability. Refer to page 19.



ADR Compliant

Products displaying this symbol comply with Australian Design Rule, or ADR requirements.



ECE Compliant

Products type approved according to ECE regulations.



Multivolt™

Can be connected to either 12 or 24 volt DC electrical systems.



RFCommSafe™

Lamps marked with RFCommSafe[™] are designed to go well beyond the requirements of international EMC standards. Refer to page 157.



UV Resistant

Designed to withstand exposure to severe ultraviolet light without fading or embrittlement. Refer to page 4.



Corrosion Proof

Non-metal housing for the ultimate in longevity under salt water conditions.



Grilamid® Lens Material

High performance clear Polyamide for extreme impact, UV, chemical and stress resistance. Refer to page 4



Enhanced Definition Technology (EDT)

To further enhance recognition of a stop lamp, an increase in illuminated area (compared to the rear position lamp) is combined with an increase in intensity. As a result the illuminated area gets larger and brighter on an EDT lamp for increased safety and awareness.



RCM Compliant

Regulatory Compliance Mark for sales in Australia and New Zealand. Refer to page 12.



Ultra Wide Visibility Optics

HELLA LED signal lamps, incorporating Ultra-Wide Visibility Optics, far exceed the minimum legal brightness requirement beyond the +/-10 degree horizontal angle. This provides a significantly enhanced stop and turn signal to the driver of the following vehicle.



HELLA Compatibility Solution (HCS)

HCS technology for safe and seamless conversion between bulb and LED direction indicators. Refer to page 20.



Stainless Steel Bracket

High grade Stainless Steel bracket for confidence in harsh environments.



Heavy Duty Mount

Supplied with heavy duty mounting bracket to withstand extreme vibration



Bulb Included Quality bulb Included



Marker and Signal Lamps

The range of HELLA Marker and Signal Lamps have been accepted as the most advanced lighting solution for commercial vehicles.





Contents

Marker and Signal Lamps

Quick Reference Product Guide	16-17
DuraLED® Lifetime Warranty	18-19
HELLA Compatibility Solution	20-21
DuraLED®	22-25
DuraLED® Combi Lamps	26-29
DuraLED® Marker Lamps	30-38
EuroLED® Rear Lamps	39
LED Number Plate Lamps	40-41
LED Combination Lamps	42-45
Jumbo-S LED Lamps	46-47
Designline LED Modules	48-49
Jumbo LED Modules	50
110mm Round LED	51-52
83mm Round LED	53-55
LED Surface Mount Strip Lamps	56-59

LED Strip Marker and Signal		60
LED High Level Brake Lamps		6
LED Recess Mount Marker		62
LED Surface Mount Marker		63
Rear Bulb Combination	65-	-60
Designline Bulb Lamps	67-	69
Bulb 76mm Round		70
Bulb 84 x 84mm Square		7
66mm Module Marker and Signal	.72-	73
Direction Indicator Lamps	.74-	75
Number Plate Lamps		7
Spare Parts for End of Line Products		7:
Reflectors	.78-	79
Accessories	.80-	8

QUICK REFERENCE PRODUCT GUIDE

LED COMBINATION LAMPS













PAGE 26

PAGE 28

PAGE 29

PAGE 43

PAGE 47

PAGE 49







PAGE 44

PAGE 55

PAGE 59

LED SINGLE FUNCTION LAMPS









PAGE 22

PAGE 46

PAGE 48

PAGE 50













PAGE 39

PAGE 52

PAGE 54

PAGE 56

PAGE 60

PAGE 61

I ED MARKER I AMPS









PAGE 32

PAGE 34

PAGE 36

PAGE 38









PAGE 30

PAGE 40

PAGE 62

PAGE 63

BULB LAMPS PAGE 65 PAGE 66 PAGE 66 PAGE 67 PAGE 68



PAGE 69

PAGE 74



PAGE 70

PAGE 74



PAGE 71

PAGE 74

PAGE 76



PAGE 75

PAGE 72



PAGE 73












REFLECTORS







PAGE 78 PAGE 79 PAGE 80



04 RELIABILITY

Continuous improvement & strenuous testing for an ultra long operating life.

DURALED® BUILT TO LAST

HELLA's growing range of DuraLED® lamps, incorporating the latest LED technology, have proven to be the superior economic and environmental choice for transport operators in New Zealand. DuraLED® has a track record to last the distance. The first DuraLED® lamps were supplied in 1998, some 20 years ago and are still in use today.

Fully sealed against dust and moisture to International Protection Standards IP 6K6/IP 6K7, and compliant with current ADR (Australian Design Rules). As a result, these lamps are approved for use in New Zealand and Australia.

Once again following market demand, we now offer a range of selected models of DuraLED® lamps with moulded-in-Deutsch (DT) Connectors.

HELLA's innovative DuraLED® lamps are designed for use on trucks, buses, caravans, emergency vehicles and speciality applications.



DURALED® LIFETIME WARRANTY

HELLA New Zealand offers a Lifetime Warranty for all automotive LED based lighting products that carry the DuraLED® brand.

The DuraLED* range has been specifically engineered by HELLA using proven design principles, precision manufacturing, robust quality systems and a selection of ultra-durable materials and components to ensure an ultra-long operating life.

HELLA's relentless pursuit to create a truly Fit and Forget range of lighting solutions has led to the creation of the DuraLED® range which represents the pinnacle of our no compromise philosophy and commitment to long-term durability and road safety.

After over 20 years of strenuous testing, continuous improvement and proven real world reliability HELLA is proud to stand behind the DuraLED® range with an industry leading Lifetime Warranty.

Whenever you see this DuraLED* logo you will have the confidence to install products that are designed and warranted to last the economic life of the vehicle they were first installed on.





HELLA COMPATIBILITY SOLUTION (HCS)

HELLA HCS lamps, electronic control and flasher units are designed to the latest ISO International Standard to provide compatibility with commercial vehicle indicator failure systems.



Vehicles driven on public roads require the operation of direction indicator lamps to be monitored and a fault instantly signalled

to the driver. Direction indicator lamps are an important road safety feature, signalling the direction change of the vehicle. Failure to signal or failure to recognise a direction indicator signal poses a significant risk of causing an accident.

LED direction indicator lamps offer a reliable Fit and Forget solution and have become the choice for cost conscious transport operators. LED lamps with their low power consumption and Multivolt™ features, are often a challenge for existing lamp failure detection systems on modern trucks and buses.

Transport fleets often feature a mix of trailers equipped with bulb based lamps as well as trailers with full LED based lighting solutions. For the efficient operation of the fleet, each of these trailers should be compatible with the indicator failure detection systems of any of the trucks in the fleet, both now and in the future.

Some manufacturers recommend fitting additional resistive loads in parallel to the LED lamps, to simulate the 21 watts consumed by a traditional bulb lamp.

Such pure resistive load solutions can be problematic for the following reasons:

- → They mask the possible failure of the actual LED signal lamp itself.
- → In many cases such pure resistive solutions do not function as they provide a linear time/current response which is significantly different to the time/current response of a bulb filament when it heats up, as in the initial heat-up period the bulbs consume significantly more power than the rated 21 Watt.
- → Additional parallel resistors consume a significant amount of energy and thus negate the lower power advantage that LED lamps offer.

LED lamps marked with the HCS symbol feature patented indicator failure control technology which allows seamless communication with HELLA HCS control flasher units, or modern European trucks with body controllers compliant with the ISO 13207-1 standard.

International Organisation for Standardisation

The International Organisation for Standardisation (ISO) is a network of national standards bodies working together to develop International Standards. Currently ISO has members from 162 countries and 3,368 technical bodies working to a common goal of making international trade and industry more effective and efficient. The standards operate by global consensus, with many governments adopting the standards into their legislation.









ISO 13207-1 Standard

ISO 13207-1 specifies a precisely timed pulse for a low power LED lamp, which momentarily mimics the power consumption of a conventional incandescent bulb. This pulse is suppressed when the LED direction indicator diagnoses itself as faulty. An ISO 13207-1 compatible flasher or vehicle body controller interprets the pulse suppression and alerts the driver to a faulty lamp or faulty wiring. Body Control Modules or HCS flasher units together with LED lamps designed to ISO 13207-1 maintain the benefit of low power LED lamps, as opposed to a parallel resistor which increases the power consumption to that of a 21 watt bulb.

HELLA New Zealand has been instrumental in laying the groundwork for the development of the HELLA Compatibility Solution (HCS), which became the blueprint for the new ISO 13207-1 standard. HELLA HCS lamps are fully compliant with ISO 13207-1.

ISO 13207-1 has been agreed to by European truck manufacturers and will be incorporated into the vehicle monitoring electronics of European trucks. Astute transport fleet operators are already future-proofing their trailers by specifying HELLA HCS Fit and Forget LED lighting solutions which will be plug-and-play with the 24 volt European trucks of tomorrow

HELLA lamps which incorporate HCS readily comply with ISO 13207-1. I = Current T = Time I Bulb Individual Pulse **ILED**

The HCS innovation generates a pulse that simulates the current draw equivalent to an incandescent bulb.

HELLA HCS Lamps



HELLA products throughout this catalogue displaying the HCS logo incorporate HELLA Compatibility Solutions technology.





P/N 2133-CS P/N 2378-CS

P/N 2378-DTCS






A selection of HCS products.

DuraLED® stop, rear position lamp featuring Enhanced Definition Technology (EDT) for increased safety and awareness. Night light function allows illumination of the rear position lamp independently from the remaining marker lamps on the vehicle. Features HELLA Ultra Wide Visibility Optics for significantly improved side visibility.













Part Number	2330-V		
Mounting	Surface mount with mounting bushes supplied. Suitable for vertical mounting.		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.		
Power Consumption	Stop: 6W Rear position: 2.5W Night: 2.5W		
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS) IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)		
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.		
Compliance	ADR 49/00		
See page 80 for DuraLE	D® accessories.		

DuraLED® Rear Direction Indicator Lamp

DuraLED* rear direction indicator lamp for trucks, buses, caravans and trailers. Features HELLA Ultra Wide Visibility Optics for significantly improved side visibility.













Part Number	2151-V	
Part Number	2151-VCS	HCS TECHNOLOGY
Mounting	Surface mount with mounting bushes supplied. Suitable for vertical mounting.	
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 3	3 volts.
Power Consumption	2151-V 6W 2151-VCS 4W	
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (T IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion	·
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.	
Compliance	2151-V: ADR 6/00: Cat 2a 2151-VCS: ② 5850 ECE R6/01 ISO 13207-1	<u>&</u>

See page 20 for further information on HCS Technology and ISO 13207-1.

DuraLED® Reversing Lamp

DuraLED® reversing lamp for trucks, buses, caravans and trailers.







Part Number	1430-V			
Mounting		Surface mount with mounting bushes supplied. Suitable for vertical mounting.		
Voltage	Multivolt [™] for optir	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.		
Power Consumption	4W			
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS) IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)			
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.			
Compliance	ADR 1/00 (24) 5850 ECE R23/00			<u>&</u>
	t designed for continu			









148	1	177 —			− 31
		148 —	+	100	

	2330-Н				
B . M . I	2330-HBL			BLISTER	PACK
Part Number	2330-HBULK			PACK	0F 4
	2330-HSS			SUPER	SEAL
Mounting		Surface mount with mounting bushes supplied. Suitable for horizontal mounting.			
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.				
Power Consumption	Stop: 6W	Stop: 6W Rear position: 2.5W Night: 2.5W			
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS) IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)				
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable. Super seal versions are pre-wired with 250mm of sheathed multi-core cable.				
Compliance	ADR 49/00	£24 5850	ECE R7/02		&
See page 80 for DuraLED® accessories.					

DuraLED® stop, rear position lamp featuring Enhanced Definition Technology (EDT) for increased safety and awareness. Night light function allows illumination of the rear position lamp independently from the remaining marker lamps on the vehicle. Features HELLA Ultra Wide Visibility Optics for significantly improved side visibility.





P/N 2330-HBL

Indicator Lamp











	2151-H			
	2151-HBL	BLISTER PACK		
Part Number	2151-HBULK	PACK OF 4		
	2151-HCS	HCS TECHNOLOGY		
	2151-HSS	SUPER SEAL		
Power Consumption	2151-H/HBL/HBULK/HSS 6W 2151-HCS	4W		
Compliance	2151-H/HBL/HBULK/HSS: ADR 6/00: Cat 2a 2151-HCS:			
Other specifications as per P/N 2330-H. See page 20 for further information on HCS Technology and ISO 13207-1.				

DuraLED® Rear Direction

DuraLED® rear direction indicator lamp for trucks, buses, caravans and trailers. Features HELLA Ultra Wide Visibility Optics for significantly improved side visibility.





P/N 2151-HBL





	1430-H			
Part Number	1430-HBL			BLISTER PACK
	1430-HSS			SUPER SEAL
Power Consumption	4W			
Compliance	ADR 1/00	£24 5850	ECE R23/00	<u>&</u>
Other specifications as per P/N 2330-H. Reversing lamps are not designed for continuous operation.				

DuraLED® Reversing Lamp

DuraLED® reversing lamp for trucks, buses, caravans and trailers.






P/N 1430-HBL

DuraLED* stop, rear position lamp featuring Enhanced Definition Technology (EDT) for increased safety and awareness. Night light function allows illumination of the rear position lamp independently from the remaining marker lamps on the vehicle.





ADR 49/00

See page 80 for DuraLED $\!\!^{\otimes}$ accessories.

Compliance





Part Number	2330		
Part Number	2330-BULK	PACK OF 4	
Mounting	Surface mount with mounting bushes supplied. Suitable for horizontal or vertical mounting.		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.		
Power Consumption	Stop: 6W Rear position: 1W Night: 1W		
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)	S)	
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.		

DuraLED® Rear Direction Indicator Lamp

DuraLED® rear direction indicator lamp for trucks, buses, caravans and trailers.








Part Number	2151			
Part Number	2151-BULK	PACK OF 4		
Mounting	Surface mount with mounting bushes supplied. Suitable for horizontal or vertical mounting.			
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.			
Power Consumption	9W			
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TV: IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)	S)		
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.			
Compliance	ADR 6/00: Cat 2a	<u>&</u>		









Part Number	2331-BULK	PACK OF 4			
Mounting	Surface mount with mounting bushes supplied. Suitable for horizontal or vertical mounting.				
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 v	olts.			
Power Consumption	Stop: 6W Rear position: 1W Night: 1W				
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)	5)			
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.				
Lens Material	Polycarbonate.				
Compliance	ADR 49/00	<u>&</u>			
See page 80 for DuraLE	See page 80 for DuraLED® accessories.				

DuraLED* stop, rear position lamp made from polycarbonate, for off-road vehicles such as logging trucks. Night light function allows illumination of the rear position lamp independently from the remaining marker lamps on the vehicle, resulting in low power consumption.







Part Number	2152-BULK PACK			
Mounting	Surface mount with mounting bushes supplied. Suitable for horizontal or vertical mounting.			
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.			
Power Consumption	9W			
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TV: IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)	S)		
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.			
Lens Material	Polycarbonate.			
Compliance	ADR 6/00: Cat 2a	<u>&</u>		

DuraLED® Rear Direction Indicator Lamp

DuraLED* rear direction indicator lamp made from polycarbonate for off-road vehicles such as logging trucks.



Polycarbonate Lenses

Whilst polycarbonate features a higher impact resistance compared to our preferred Enhanced Impact Acrylic, the trade-off for polycarbonate is its lower resistance to a number of commonly used chemicals.

For applications where both extreme impact resistance as well as a high resistance to chemicals is required, we recommend HELLA LED lamps manufactured from Swiss-made Grilamid® Optical Nylon.

DuraLED® Combi-S Stop/Rear Position/Rear Direction Indicator Lamp - Heavy Duty

DuraLED® combination lamp featuring Ultra Wide Visibility Optics for significantly improved side visibility and Enhanced Definition Technology (EDT). Suitable for commercial vehicles and boat trailers. Shockproof and fully sealed to withstand water submersion and high-pressure washing. Optic appears clear until illuminated.





P/N 2378-BL



Ultra slim height of only 25mm.















	2378				
	2370				
	2378-BL	BLISTER PACK			
	2378-BULK	PACK OF 12			
Part Number	2378-CS	HCS TECHNOLOGY			
	2378-6M	6M CABLE			
	2378-6MBULK	6M CABLE PACK OF 12			
Mounting	Surface mount with mounting bushes supplied. Suitable for horizontal or vertical mounting.				
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.				
Power Consumption	Stop: 5W Rear position: 1W Rear direction indicator: 5W				
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS). IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)				
Cable Length	P/Ns 2378/BL/BULK/CS Pre-wired with 2.5m of sheathed multi-core cable P/Ns 2378-6M/6MBULK Pre-wired with 6m of sheathed multi-core cable				
Lens Material	High impact and chemical resistant Grilamid® lens				
Compliance	ADR 6/00: Cat 2a	only)			
See page 80 for DuraLED® accessories. See page 20 for further information on HCS Technology and ISO 13207-1.					

COMBI-S LAMP FUNCTIONS Rear direction indicator Stop Rear position

DuraLED® Combi-S Trailer Lighting Kit

A complete Fit and Forget solution for commercial trailers or boat trailers.















Part Number	2378-TP				
Kit Contents	Each trailer lamp kit contains:				
	2 x 2378	DuraLED* Combi-S stop/rear position and rear direction indicator lamp with 6m sheathed multi-core cable.			
	2 x 2923	Red retro reflector			
	1 x 2559 1 x 4921	LED number plate lamp with 5m sheathed multi-core cable. 7 pole flat plug			



techfeedback@hella.co.nz


















24	25
	96

Part Number	2378-DT				
Part Number	2378-DTCS	HCS TECHNOLOGY			
Mounting	Surface mount with mounting bushes supplied. Suitable for horizontal or vertical mounting.				
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.				
Power Consumption	Stop: 5W Rear direction indicator: Rear position: 1W Night:		itor: 5V		
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS). IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)				
Accessory	4963-P 6 pole DT plug, wedge and 6 contacts.				
Lens Material	High impact and chemical resistant Grilamid® lens				
Compliance	ADR 6/00: Cat 2a	ADR 49/00 ECE R6/01	ISO 13207-1 (2378-DT ECE R7/02	CS only)	<u>&</u>
See page 20 for further information on HCS Technology and ISO 13207-1.					

DuraLED° Combi-S Stop/Rear Position/Rear Direction Indicator Lamp and Night Light with DT Connector - Heavy Duty

DuraLED* combination lamp featuring Ultra Wide Visibility Optics for significantly improved side visibility and Enhanced Definition Technology (EDT). Night light function allows illumination of the rear position lamp independently from the remaining marker lamps on the vehicle, resulting in low power consumption. Suitable for commercial and boat trailers. Shockproof and fully sealed to withstand water submersion and high-pressure washing. Optic appears clear until illuminated.





P/N 4963-P Not included with lamp.



Rear view showing DT connector that allows application of self-adhesive heat shrink.










Other specifications as per P/N 2378-DT.









383-24VCS P/N 2383-F

DuraLED® combination lamp featuring modern clear lens design. Low power consumption and long life equates to economical running costs. Ideal for 24V commercial vehicles. Optic appears

DuraLED® Combi-S Stop/Rear Position/Rear Direction Indicator/

Reversing Lamp and Night Light with DT Connector - Heavy Duty





Ultra slim height of only 25mm.



Rear view showing DT connector that allows application of self-adhesive heat shrink.

		P/N 2383-24VCS	P/N 2383-DT24VCS
Part Number	2383-24VCS	HCS TECHNOLOGY	
	2383-DT24VCS (DT Conr	HCS TECHNOLOGY	
Mounting	Surface mount with mountir Suitable for horizontal mour	J 11	
Voltage	24V		
Power Consumption	Stop: Rear position: Rear direction indicator:	3W Reverse: 1W Night (2383-DT2) 3W	3W 4VCS only): 1W
Cable Length	Pre-wired with 2.5m of shea	thed multi-core cable (except [OT versions).
Compliance	©24 5894 ISO 13207-1 ECE R6/01 ECE R7/02	ECE R23/00	



DuraLED® Combi-R Stop/Rear Position/Rear Direction Indicator Lamp with Retro Reflector

DuraLED® combination lamp with 34cm² red retro reflector which features Enhanced Definition Technology (EDT). Suitable for light commercial and boat trailers. Shockproof and fully sealed to withstand water submersion and high-pressure washing.





P/N 2377-BL



Ultra slim height of only 25mm.















Part Number	2377						
Part Number	2377-BL			BLISTER	PACK		
Mounting	Surface mount Suitable for hor			supplied.			
Voltage	Multivolt™ for o	ptimum brightr	ness in 12	and 24 volt system	ems.		
Power Consumption	Stop: Rear position: Rear direction in	ndicator:	4W 1W 4W				
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS). IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)						
Cable Length	Pre-wired with	2.5m of sheath	ed multi-	core cable.			
Lens Material	High impact and	d chemical resi	stant Gril	amid° lens			
Compliance	ADR 47/00 ©24 5882	ADR 6/00: Ca ECE R6/01	at 2a	ADR 49/00 ECE R7/02	ECE	R3/02	<u>&</u>
See page 80 for DuraLED® accessories.							



DuraLED® Combi-R Trailer Lighting Kit

A complete Fit and Forget solution for trailers or caravans.



















DuraLED® Combi Stop/Rear Position/Rear Direction Indicator/

DuraLED® combination lamp featuring modern clear lens design. Low power consumption and long life equates to economical running costs. Ideal for trucks and utes. Optic appears clear


Reversing Lamp

until illuminated.









	2380				
	2380-BL	BLISTER PACK			
Part Number	2380-BULK	PACK OF 12			
	2380-GMD	GRILAMID° LENS			
	2381	NO REVERSE			
Mounting	Surface mount with mounting bushes supplied. Suitable for horizontal mounting.				
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt system	S.			
Power Consumption	Stop: 5W Rear direction indicate Rear position: 1W Reverse:	tor: 4W 3W			
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS). IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)				
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.				
Compliance	ADR 1/00 ADR 6/00: Cat 2a ADR 49/00 €24 5870 ECE R6/01 ECE R7/02	ECE R23/00 💩			

3 3100



P/N 2380-BL

See page 80 for DuraLED® accessories.
















Don't Novelon	2380-DT					
Part Number	2380-DTGMI	2380-DTGMD				AMID° LENS
Mounting	Surface mount with mounting bushes supplied. Suitable for horizontal mounting.					
Voltage	Multivolt [™] for o	ptimum brighti	ness in 12	2 and 24 volt syste	ems.	
Power Consumption	Stop: Rear position: Rear direction	indicator:	5W 1W 4W	Reverse: Night:		3W 1W
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS) IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)					
Lens Material	High impact ar	nd chemical res	istant Gri	lamid® lens. P/N 2	2380-DTGMD o	nly.
Accessory	4963-P	6 pole DT plu	g, wedge	and 6 contacts.		
Compliance	ADR 1/00 £24 5870	ADR 6/00: Ca ECE R6/01	at 2a	ADR 49/00 ECE R7/02	ECE R23/0	0 💩

DuraLED® Combi Stop/Rear Position/Rear Direction Indicator/ Reversing Lamp and Night Light with DT Connector

DuraLED® combination lamp featuring modern clear lens design. Low power consumption and long life equates to economical running costs. Ideal for trucks and utes. Optic appears clear until illuminated.





Rear view showing DT connector that allows application of self-adhesive heat shrink.



P/N 4963-P Not included with lamp.

DuraLED® Flush Mount Side Marker Lamp

Red/amber flush mount side marker lamp.
Featuring a low profile of only 15mm and an ultra durable Grilamid® nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated. With optional stainless steel rim.





Stainless steel rim version

Lens Material

GMD

Fower Supply

Complaint

ADR

Complaint

	2083					
5	2083-BULK (Pack of 16)					
Part Number	2083S	POLISHED STAINLESS				
	2083S-BULK (Pack of 16)		STEEL RIM			
Mounting	Flush mount. Suitable for horizontal or vertical mounting.					
Voltage	Multivolt™ for optimum brightne	ess in 12 and 24 volt systems	5.			
Power Consumption	<0.5W					
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)					
Cable Length	Pre-wired with 0.5m of sheathed multi-core cable. Bulk pack pre-wired with 2.5m of sheathed multi-core cable.					
Spare Parts	9.2310.09-BULK Black screw caps (Pack of 4) 95968500 Stainless steel rim - Polished					
Lens Material	High impact and chemical resistant Grilamid® lens					
Compliance	ADR 45/01					
See pages 81-82 for DuraLED® marker lamp accessories.						


DuraLED° Flush Mount Front Position/End Outline Lamp

White flush mount front position or front end outline LED lamp with optional stainless steel rim. Featuring a low profile ultra durable Grilamid" nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.










	Stairtiess steet Hill Version				
	2059				
Part Number	2059-BULK (Pack of 16)				
Part Number	2059S	POLISHED STAINLESS			
	2059S-BULK (Pack of 16)	STEEL RIM			
Mounting	Flush mount. Suitable for horizontal or vertical mounting.				
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.				
Power Consumption	<0.5W				
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)				
Cable Length	Pre-wired with 0.5m of sheathed multi-core cable. Bulk pack pre-wired with 2.5m of sheathed multi-core c	able.			
Spare Parts	9.2310.09-BULK Black screw caps (Pack of 4) 95968500 Stainless steel rim - Polished				
Lens Material	High impact and chemical resistant Grilamid® lens				
Compliance	ADR 49/00	<u>&</u>			
See pages 81-82 for Du	See pages 81-82 for DuraLED® marker lamp accessories.				











Part Number	2060			
	2060-BULK (Pack of 16)			
Part Number	2060S		POLISHED STAINLESS	
	2060S-BULK (Pack of 16)		STEEL RIM	
Mounting	Flush mount. Suitable for horizontal or vertic	al mounting.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.			
Power Consumption	<0.5W			
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)			
Cable Length	Pre-wired with 0.5m of sheathed multi-core cable. Bulk pack pre-wired with 2.5m of sheathed multi-core cable.			
Spare Parts	9.2310.09-BULK Black screw caps (Pack of 4) 95968500 Stainless steel rim - Polished			
Lens Material	High impact and chemical resis	stant Grilamid® lens		
Compliance	ADR 49/00		&	
See pages 81-82 for DuraLED® marker lamp accessories.				

DuraLED® Flush Mount Front End Outline Lamp

Amber flush mount front end outline LED lamp for trailers with optional stainless steel rim. Featuring a low profile ultra durable Grilamid* nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.





P/N 2060S











Part Number	2310	
	2310-BULK (Pack of 16)	
	23105	POLISHED STAINLESS
	2310S-BULK (Pack of 16)	STEEL RIM

Other specifications as per P/N 2060


DuraLED® Flush Mount Rear Position/End Outline Lamp

Red flush mount rear position or rear end outline LED lamp with optional stainless steel rim. Featuring a low profile ultra durable Grilamid* nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.





P/N 2310S

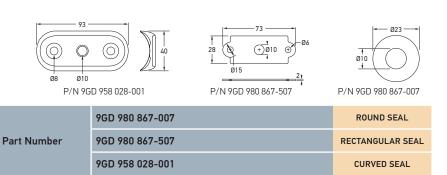

DuraLED® Flush Mount Gaskets



P/N 9GD 958 028-001

DuraLED® Side Marker Lamp

Red/amber side marker LED lamp. Optic appears clear until illuminated.















P/N 2053	P/N 2053CHROME

	2053		
Part Number	2053-BULK	PACK OF 4	
	2053CHROME	CHROME PLATED	
Mounting	Surface mount.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	<1W		
Protection	Reverse polarity protection. IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)		
Cable Length	Pre-wired with 0.5m of sheathed multi-core cable. Bulk pack pre-wired with 2.5m of sheathed multi-core cable.		
Spare Part	9.2053.08 Black nylon housing		
Compliance	ADR 45/01	<u>&</u>	
See pages 81-82 for DuraLED® marker lamp accessories.			

DuraLED® Side Marker Lamp - Grilamid®

Red/amber ultra high impact resistant side marker LED lamp featuring Grilamid® lens and nylon housing. Optic appears clear until illuminated.













Part Number	2053-GMD		
	2053-GMDBULK	PACK OF 4	
Mounting	Surface mount.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	<1W		
Protection	As per P/N 2053.		
Cable Length	Pre-wired with 0.5m of sheathed multi-core cable. Bulk pack pre-wired with 2.5m of sheathed multi-core cable.		
Spare Part	9.2053.08 Black nylon housing		
Lens Material	High impact and chemical resistant Grilamid® lens		
Compliance	ADR 45/01	&	

DuraLED® Cab Marker/Supplementary Side Direction Indicator Lamp (Cat. 5)





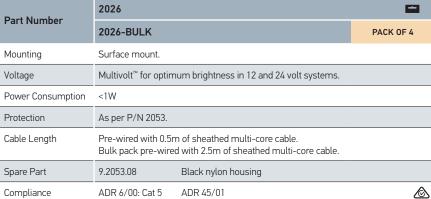













DuraLED® Front Position/ End Outline Lamp

White ultra high impact resistant front end outline or front position LED lamp featuring Grilamid® lens and nylon housing. Optic appears clear until illuminated.



ADR COMPLIANCE	P





Part Number	2054		
Part Number	2054-BULK	PACK OF 4	
Mounting	Surface mount. Suitable for horizontal mounting.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	<1W		
Protection	Reverse polarity protection. IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)		
Cable Length	Pre-wired with 0.5m of sheathed multi-core cable. Bulk pack pre-wired with 2.5m of sheathed multi-core cable.		
Spare Part	9.2053.08 Black nylon housing		
Lens Material	High impact and chemical resistant Grilamid® lens		
Compliance	ADR 49/00	<u> </u>	
See pages 81-82 for DuraLED® marker lamp accessories.			









Part Number	2051		
	2051-BULK	PACK OF 4	
Mounting	Surface mount. Suitable for horizontal mounting.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	<1W		
Protection	As per P/N 2054.		
Cable Length	Pre-wired with 0.5m of sheathed multi-core cable. Bulk pack pre-wired with 2.5m of sheathed multi-core cable.		
Spare Part	9.2053.08 Black nylon housing		
Lens Material	High impact and chemical resistant Grilamid® lens		
Compliance	ADR 49/00	<u>&</u>	

DuraLED® Front End Outline Lamp

Amber ultra high impact resistant front end outline LED lamp for trailers featuring Grilamid® lens and nylon housing. Optic appears clear until illuminated.











Part Number	2307		
	2307-BULK	PACK OF 4	
Mounting	Surface mount. Suitable for horizontal mounting.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	<1W		
Protection	As per P/N 2054.		
Cable Length	Pre-wired with 0.5m of sheathed multi-core cable. Bulk pack pre-wired with 2.5m of sheathed multi-core cable.		
Spare Part	9.2053.08 Black nylon housing		
Lens Material	High impact and chemical resistant Grilamid® lens		
Compliance	ADR 49/00	&	

DuraLED® Rear Position/ End Outline Lamp

Red ultra high impact resistant rear end outline or rear position LED lamp featuring Grilamid® lens and nylon housing. Optic appears clear until illuminated.



DuraLED® Heavy Duty Side Marker Lamp with DT Connector

- Red/Amber

Heavy duty red/amber LED side marker lamp with DT connector and nylon housing. Featuring ultra durable Grilamid® nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.










P/N 4960-P Not included with lamp.













Part Number	2073		
Part Number	2073-BULK	PACK OF 8	
Mounting	Surface mount. Suitable for horizontal mounting.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	<1W		
Protection	Reverse polarity protection. Fully sealed against dust, high-pressure washing and temporary water immersion.		
Spare Parts	4960-P2 pole DT plug, wedge and 2 contacts9.1557.052.0m sheathed cable with DT plug9.2073.09Black nylon housing9.2073.11White nylon housing		
Lens Material	High impact and chemical resistant Grilamid® lens		
Compliance	ADR 45/01		

DuraLED® Heavy Duty Cab Marker/ **Supplementary Side Direction** Indicator Lamp with DT Connector

Heavy duty amber LED cab marker or supplementary side direction indicator lamp with DT connector and nylon housing. Featuring ultra durable Grilamid® nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.












Part Number	2076		
Part Number	2076-BULK		PACK OF 8
Mounting	Surface mount. Suitable for horizontal mounting.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	<1W		
Protection	Reverse polarity protection. Fully sealed against dust, high-pressure washing and temporary water immersion.		
Spare Parts	4960-P 2 pole DT plug, wedge and 2 contacts 9.1557.05 2.0m sheathed cable with DT plug 9.2073.09 Black nylon housing 9.2073.11 White nylon housing		
Lens Material	High impact and chemical resistant Grilamid® lens		
Compliance	ADR 6/00: Cat 5	ADR 45/01	<u>&</u>











Part Number	2074		
rait Number	2074-BULK		PACK OF 8
Mounting	Surface mount. Suitable for horizontal mounting.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	<1W		
Protection	Reverse polarity protection. Fully sealed against dust, high-pressure washing and temporary water immersion.		
Spare Parts	4960-P 9.1557.05 9.2073.09 9.2073.11	2 pole DT plug, wedge and 2 contacts 2.0m sheathed cable with DT plug Black nylon housing White nylon housing	
Lens Material	High impact and	chemical resistant Grilamid® lens	
Compliance	ADR 49/00		<u>&</u>

DuraLED® Heavy Duty Front Position/ End Outline Lamp with DT Connector

Heavy duty white front position or end outline LED lamp with DT connector and nylon housing. Featuring ultra durable Grilamid* nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.











Part Number	2071		
	2071-BULK	PACK OF 8	
Mounting	Surface mount. Suitable for horizontal mounting.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	<1W		
Protection	Reverse polarity protection. Fully sealed against dust, high-pressure washing and temporar	y water immersion.	
Spare Parts	As per P/N 2074		
Lens Material	High impact and chemical resistant Grilamid® lens		
Compliance	ADR 49/00	<u>&</u>	

DuraLED® Heavy Duty Front End Outline Lamp with DT Connector

Heavy duty amber front end outline LED lamp for trailers with DT connector and nylon housing. Featuring ultra durable Grilamid* nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.











Part Number	2312		
Part Number	2312-BULK	PACK OF 8	
Mounting	Surface mount. Suitable for horizontal mounting.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	<1W		
Protection	Reverse polarity protection. Fully sealed against dust, high-pressure washing and temporar	y water immersion.	
Spare Parts	As per P/N 2074		
Lens Material	High impact and chemical resistant Grilamid® lens		
Compliance	ADR 49/00	&	

DuraLED® Heavy Duty Rear Position/ End Outline Lamp with DT Connector

Heavy duty red rear position or end outline LED lamp with DT connector and nylon housing. Featuring ultra durable Grilamid* nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.



DuraLED® Heavy Duty Side Marker Lamp - Red/Amber


Heavy duty red/amber LED side marker lamp with stainless steel housing. Featuring ultra durable Grilamid® nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.






P/N 2058 P/N 2058P





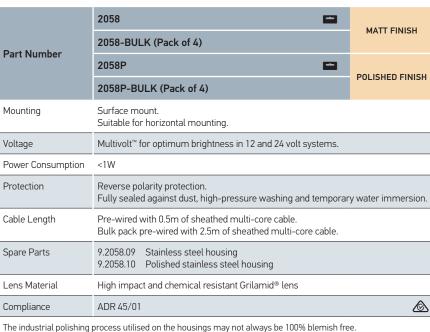

DuraLED® Heavy Duty Cab Marker/ **Supplementary Side Direction Indicator Lamp**

Heavy duty LED cab marker or supplementary side direction indicator lamp with stainless steel housing. Featuring ultra durable Grilamid® nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.











	2027	MATT FINISH	
D I	2027-BULK (Pack of 4)	MATT FINISH	
Part Number	2027P	POLISHED FINISH	
	2027P-BULK (Pack of 4)	PULISHED FINISH	
Mounting	Surface mount. Suitable for horizontal mounting.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	<1W		
Protection	Reverse polarity protection. Fully sealed against dust, high-pressure washing and temporar	y water immersion.	
Cable Length	Pre-wired with 0.5m of sheathed multi-core cable. Bulk pack pre-wired with 2.5m of sheathed multi-core cable.		
Spare Parts	9.2058.09 Stainless steel housing 9.2058.10 Polished stainless steel housing		
Lens Material	High impact and chemical resistant Grilamid® lens		
Compliance	ADR 6/00: Cat 5 ADR 45/01		
The industrial polishing	The industrial polishing process utilised on the housings may not always be 100% blemish free.		


The industrial polishing process utilised on the housings may not always be 100% blemish free.











0000

	2061	====	
	2061-BULK (Pack of 4)	MATT FINISH	
Part Number	2061P	DOLIGHED EINIGH	
	2061P-BULK (Pack of 4)	POLISHED FINISH	
Mounting	Surface mount. Suitable for horizontal mounting.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	<1W		
Protection	Reverse polarity protection. Fully sealed against dust, high-pressure washing and temporar	y water immersion.	
Cable Length	Pre-wired with 0.5m of sheathed multi-core cable. Bulk pack pre-wired with 2.5m of sheathed multi-core cable.		
Spare Parts	9.2058.09 Stainless steel housing 9.2058.10 Polished stainless steel housing		
Lens Material	High impact and chemical resistant Grilamid® lens		
Compliance	ADR 49/00		
The industrial polishing process utilised on the housings may not always be 100% blemish free.			

DuraLED® Heavy Duty Front Position/End Outline Lamp

Heavy duty white front position/end outline LED lamp with stainless steel housing. Featuring ultra durable Grilamid® nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.





P/N 2061

ADR COMPLIANCE







Part Number	2062	MATT FINISH
	2062-BULK (Pack of 4)	MATT FINISH
	2062P	POLISHED FINISH
	2062P-BULK (Pack of 4)	PULISHED FINISH

Other specifications as per P/N 2061.

DuraLED® Heavy Duty Front End Outline Lamp

Heavy duty amber front end outline LED lamp for trailers, with stainless steel housing. Featuring ultra durable Grilamid* nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.











Part Number	2311	MATT FINISH	
	2311-BULK (Pack of 4)	MAII FINISH	
	2311P	POLISHED FINISH	
	2311P-BULK (Pack of 4)	PULISHED FINISH	

Other specifications as per P/N 2061.

DuraLED® Heavy Duty Rear Position/End Outline Lamp

Heavy duty red rear position/end outline LED lamp with stainless steel housing. Featuring ultra durable Grilamid* nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.



DuraLED® Supplementary Side Direction Indicator Lamp (Cat. 5)

LED supplementary side direction indicator featuring amber impact resistant polycarbonate lens and HELLA's Ultra Wide Visibility Optics for significantly improved side visibility. Projected luminous area of 51cm². See page 75 for function category details.





P/N 2031-BL



65
2021









Part Number	2031		
Part Number	2031-BL BLISTER F	PACK	
Mounting	Surface mount with mounting bushes supplied. Suitable for horizontal mounting.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	3W		
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS) Fully sealed against dust, high-pressure washing and temporary water immersion.		
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.		
Spare Part	9.2366.17 Screw boss kit		
Lens Material	Polycarbonate.		
Compliance	ADR 6/00: Cat 5	&	

DuraLED® Side Marker Lamp with Clear Lens

LED side marker featuring clear impact resistant polycarbonate lens and HELLA's Ultra Wide Visibility Optics for significantly improved side visibility. Optic appears clear until illuminated.





P/N 2033-BL











Part Number	2033		
	2033-BL BLISTER PACK		
Mounting	Surface mount with mounting bushes supplied.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	3W		
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS) Fully sealed against dust, high-pressure washing and temporary water immersion.		
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.		
Spare Part	9.2366.17 Screw boss kit		
Lens Material	Polycarbonate.		
Compliance	ADR 45/01		

DuraLED® Rear Position/ **End Outline Lamp**

LED rear position/rear end outline lamp featuring red impact resistant polycarbonate lens and HELLA's Ultra Wide Visibility Optics for significantly improved side visibility.












Part Number	2309
Mounting	Surface mount with mounting bushes supplied. Suitable for horizontal mounting.
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.
Power Consumption	3W
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS) Fully sealed against dust, high-pressure washing and temporary water immersion.
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.
Spare Part	9.2366.17 Screw boss kit
Lens Material	Polycarbonate.
Compliance	ADR 49/00 &









	2366		
Part Number	2366-BL	BLISTER PACK	
	2366-BULK	PACK OF 12	
Mounting	Surface mount with mounting bushes supplied.		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.	
Power Consumption	Stop: 2.5W Rear position: 0.5W		
Protection	Reverse polarity and 1500 watt Transient Voltage Suppressor (T IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion	•	
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.		
Compliance	ADR 49/00 (E4) 10208 ECE R7/02	<u>&</u>	
See page 83 for Eurol E	N® accessories		

EuroLED® Stop/Rear Position Lamp

EuroLED* stop, rear position lamp with red lens. The use of precision optics enable a single high intensity LED to be used in a commercial vehicle lamp, resulting in low power consumption. Features HELLA Ultra Wide Visibility Optics for significantly improved side visibility.





P/N 2366-BL









	2133		
D .N .I	2133-BL	BLISTER PACK	
Part Number	2133-BULK	PACK OF 12	
	2133-CS	HCS TECHNOLOGY	
Mounting	Surface mount with mounting bushes supplied.		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.		
Power Consumption	2.5W		
Protection	As per P/N 2366.		
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.		
Compliance	ADR 6/00: Cat 2a E4 10208 ECE R6/01 ISO 13207-1 (213	33-CS only)	
See page 20 for further	information on HCS Technology and ISO 13207-1.		

EuroLED® Rear Direction Indicator Lamp

EuroLED* rear direction indicator lamp with amber lens and single LED. Features HELLA Ultra Wide Visibility Optics for significantly improved side visibility.





P/N 2133-BL





	1433		
Part Number	1433-BL	BLISTER PACK	
	1433-BULK	PACK OF 12	
Mounting	Surface mount with mounting bushes supplied.		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.		
Power Consumption	2.5W		
Protection	As per P/N 2366.		
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.		
Compliance	ADR 1/00 (E4) 10208 ECE R23/00	<u>&</u>	

Reversing lamps are not designed for continuous operation.

EuroLED® Reversing Lamp

EuroLED* reversing lamp with clear lens and single LED.





P/N 1433-BL

techfeedback@hella.co.nz


DuraLED® Surface Mount Number Plate Insert

White DuraLED® number plate insert featuring a low profile of only 17mm and an ultra durable Grilamid® nylon lens for extreme impact, UV, chemical and stress resistance. Two inserts per number plate are required for compliance. Can be mounted either above or beside the number plate. Optic appears clear until illuminated.





P/N 8HG 958 029-001

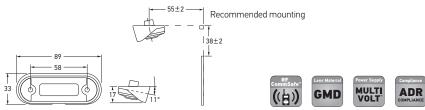

Part Number	2560			
	2560-BULK		PACK OF 16	
Mounting	Surface mount.			
Voltage	Multivolt™ for optimum bright	ness in 12 and 24 volt systems.		
Power Consumption	0.5W	D.5W		
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high pressure/steam jet cleaning)			
Cable Length	Pre-wired with 0.5m of multi-core cable. Bulk pack pre-wired with 2.5m of multi-core cable.			
Spare Parts	9.2310.09-BULK 8HG 958 029-001	Black screw caps (Pack of 4) Angle mount bracket		
Lens Material	High impact and chemical resistant Grilamid® lens			
Compliance	ADR 48/00		<u>&</u>	





Part Number

Power Consumption

Mounting

Voltage

Protection

Cable Length

Spare Parts

Compliance





2559

0.5W

9.2559.02

9.5240.30

9.2559.08

9.2559.09

9.2559.19


ADR 48/00

2559-BULK

Surface mount.

Reverse polarity protection.

Pre-wired with 0.5m of multi-core cable. Bulk pack pre-wired with 2.5m of multi-core cable.



Multivolt $^{\text{\tiny{M}}}$ for optimum brightness in 12 and 24 volt systems.

IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)

Mounting spacer - black

Mounting kit - black


Mounting kit - white

LED insert

Black caps

ECE R4/00

+	85			
(0		0	† 36	
		=	<u> </u>	
кL			20	l



PACK OF 8

LED Number Plate Lamp

White LED number plate lamp. Bulk version includes 20mm mounting spacer. One lamp required for ADR compliance.






Mounting spacer P/N 9.2559.08



P/N 2559

&



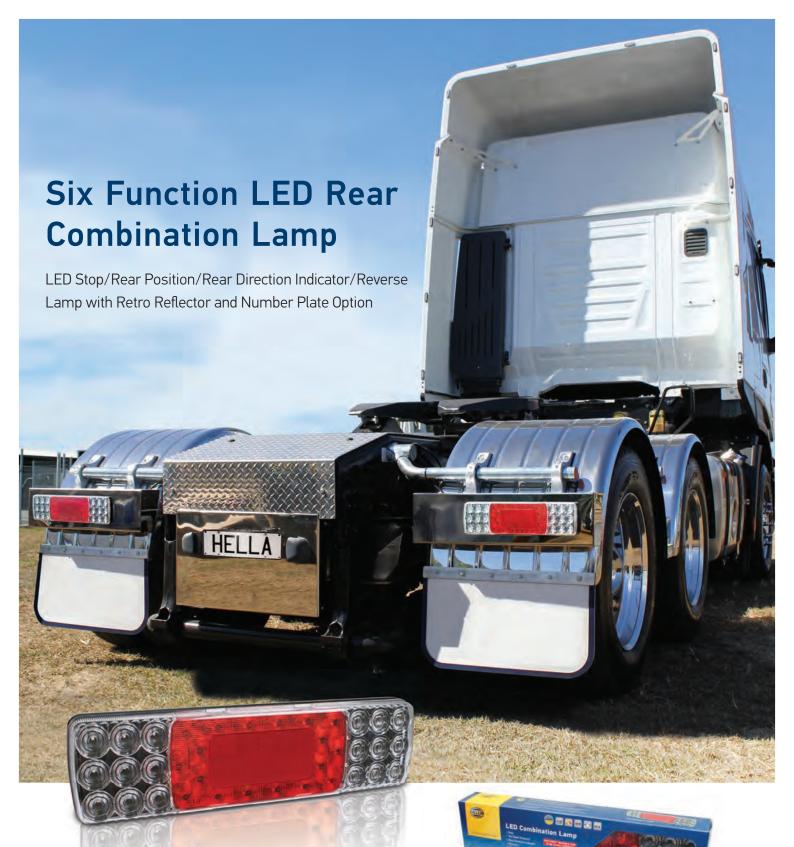

These stylish lamps combine form with function, incorporating stop, rear position, rear direction indicator and reverse lamps with a central reflector, and offers an optional number plate lamp function. To combine all rear marker and signal functions in a single lamp with a five core cable allows for a tangible reduction in installation time.

This lamp is protected by a lens made of specially formulated high impact acrylic, which is resistant to long-term harsh UV exposure and tolerant to chemicals commonly used in the transport industry. Our team designed this lamp to HELLA's Fit and Forget standard, to withstand the most demanding environments.

All features of this six function rear combination lamp, including the latest ISO 13207-1 compliance, are designed to ensure lowest cost of ownership for the astute transport operator.

Combination Lamp with Attractive Retail Packaging














Part Number	2391	•	HCS TECHNOLOGY
Mounting	Surface mount with mounting accessories supplied. Suitable for horizontal mounting.		
Voltage	Multivolt™ for optimum bright	ness in 12 and 24 volt systems.	
Power Consumption	Stop: Rear position: Rear direction indicator: Reverse:	5W <2W 6W 5W	
Protection	IP 6K7 (Protection against dus	tt Transient Voltage Suppressor (1 st and temporary water immersio ust and high-pressure/steam jet (n)
Cable Length	Pre-wired with 2.5m of sheath	ned multi-core cable.	
Spare Part	9.2391.08	Mounting pack	
Compliance	ADR 1/00 ADR 6/00: Cat 2a	ADR 47/00 ADR 49/00 ISO 1	3207-1
See page 20 for further	information on HCS Technology a	nd ISO 13207-1.	

COMBINATION LAM	P FUNCTIONS		
	用一個		
Stop	Rear position	Rear direction indicator	Reverse

LED Stop/Rear Position/Rear Direction Indicator/Reversing Lamp with Retro Reflector

LED combination lamp with 64cm² red retro reflector. Modern clear lens design with black mounting base. Features HCS Technology with ISO 13207-1 compliance. Shockproof and fully sealed to withstand water submersion and high-pressure washing. Direction indicator optic appears clear until illuminated.





P/N 2391













Part Number	2392L	•	LEFT HAND SIDE
Part Number	2392R	•	RIGHT HAND SIDE
Mounting	Surface mount with mounting Suitable for horizontal mount		
Voltage	Multivolt™ for optimum bright	ness in 12 and 24 volt systems.	
Power Consumption	Stop: Rear position/Number plate: Rear direction indicator: Reverse:	5W <2W 6W 5W	
Protection	IP 6K7 (Protection against dus	tt Transient Voltage Suppressor (1 st and temporary water immersio ust and high-pressure/steam jet (n)
Cable Length	Pre-wired with 2.5m of sheat	ned multi-core cable.	
Spare Part	9.2391.08	Mounting pack	
Compliance	ADR 1/00 ADR 6/00: Cat 2a ISO 13207-1	ADR 47/00 ADR 48/00 ADR	49/00
See page 20 for further	information on HCS Technology a	nd ISO 13207-1	

COMBINATION LAMP FUNCTIONS Stop Rear direction Number plate Rear position Reverse

indicator

LED Stop/Rear Position/Rear Direction Indicator/Reversing Lamp with Retro Reflector and Number Plate Function

LED combination lamp with 64cm² red retro reflector and number plate function. Modern clear lens design with black mounting base. Features HCS Technology with ISO 13207-1 compliance. Shockproof and fully sealed to withstand water submersion and high-pressure washing. Direction indicator optic appears clear until illuminated.





P/N 2392L

LED Stop/Rear Position/ Rear Direction Indicator Lamp

LED stop, rear position and rear direction indicator lamp with 18cm² red retro reflector. Modern clear lens design with black mounting base. Low power consumption and long life equates to economical running costs. Convenient mounting base with multiple fixing points allow easy fitment to most trailers/vehicles. The lamp is fully sealed against dust and moisture ingress. Optic appears clear until illuminated.







P/N 2394

P/N 9.2394.09 Mounting spacer (Not included with lamp)













	2394			
Don't Novel on	2394-BULK			PACK OF 18
Part Number	2394-6M			
	2394-6MBULK		PACK OF 10	
Mounting		n choice of mounting holes. Lam ntal or vertical mounting.	ıp clips into r	nounting base.
Voltage	Multivolt™ for optim	num brightness in 12 and 24 volt	systems.	
Power Consumption	Stop: Rear position: Rear direction indic	2W 1W ator: 2W		
Protection	IP 6K7 (Protection	d transient spike circuit protection against dust and temporary wate against dust and high-pressure	er immersior	
Cable Length	2394 2394-6M	Pre-wired with 0.5m of sheath		
Spare Parts	9.2394.08 9.2394.09	Mounting base Mounting spacer (Not included	i)	
Lens Material	High impact and ch	emical resistant Grilamid® lens		
Compliance	ADR 6/00: Cat 2a	ADR 47/00 ADR	49/00	<u> </u>




















	2395	
Part Number	2395-BULK	PACK OF 18
Part Number	2395-6M	
	2395-6MBULK	PACK OF 10
Mounting	Surface mount with choice of mounting holes. Lamp clips into Suitable for horizontal or vertical mounting.	mounting base.
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.	
Power Consumption	Stop: 2W Rear position/Number plate: 1W Rear direction indicator: 2W	
Protection	Reverse polarity and transient spike circuit protection. IP 6K7 (Protection against dust and temporary water immersic IP 6K9K (Protection against dust and high-pressure/steam jet	
Cable Length	2395 Pre-wired with 0.5m of sheathed multi-co 2395-6M Pre-wired with 6m of sheathed multi-core	i c cabici
Spare Parts	9.2394.08 Mounting base 9.2394.09 Mounting spacer (Not included) 9GH 958 748-007 Number plate rubber mounting spacer (N	ot included)
Lens Material	High impact and chemical resistant Grilamid® lens	
Compliance	ADR 6/00: Cat 2a ADR 47/00 ADR 48/00 ADR 49	/00 💩

TRAILER LAMP FUNCTIONS Stop Rear direction indicator Rear position/ Number plate

LED Stop/Rear Position/Rear Direction Indicator Lamp with Number Plate Function

LED stop, rear position and rear direction indicator lamp with 18cm² red retro reflector and number plate function. Modern clear lens design with black mounting base. Low power consumption and long life equates to economical running costs. Convenient mounting base with multiple fixing points allow easy fitment to most trailers/vehicles. The lamp is fully sealed against dust and moisture ingress. Optic appears clear until illuminated.







P/N 9.2394.09 Mounting spacer (Not included with lamp)

P/N 2395



P/N 9GH 958 748-007 Number plate rubber mounting spacer (Not included with lamp)











Part Number	2395-TP	
Lens Material	High impact and che	emical resistant Grilamid® lens
Kit Contents	Each trailer lamp kil 1 x 2394 1 x 2395 8 x Connectors (P/N 8231S)	st contains: Stop/rear position/rear direction indicator lamp with reflex reflector. Stop/rear position/rear direction indicator/ Number plate lamp function with reflex reflector. Crimp connectors with heat shrink insulation.

LED Combination Lamp Trailer Kit

LED trailer lamp incorporating a modern clear lens design with an 18cm² red retro reflector. The optic in the lamp appears clear until illuminated.



ADR

ADR


Jumbo-S LED Stop/ Rear Position Lamp

Jumbo-S LED stop, rear position lamp with inbuilt 23cm² red retro reflector, featuring Enhanced Definition Technology (EDT) for the stop signal function. New low profile design allows surface mounting complete with mounting gaskets and screws.





P/N 2361-BL



See page 84 for Jumbo-S accessories.

Part Number	2361	
rai (Nullibei	2361-BL BLISTER PACK	[
Mounting	Surface mount with mounting bolts supplied. Suitable for horizontal or vertical mounting.	
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.	
Power Consumption	Stop: 5W Rear position: 1W	
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS) IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)	
Cable Length	Pre-wired with 200mm of cable.	
Compliance	ADR 47/00 ADR 49/00	3


Jumbo-S LED Rear Direction **Indicator Lamp**

Jumbo-S LED rear direction indicator lamp with inbuilt 23cm² red retro reflector. New low profile design allows surface mounting complete with mounting gaskets and screws. Features HCS Technology with ISO 13207-1 compliance.





P/N 2161-BL

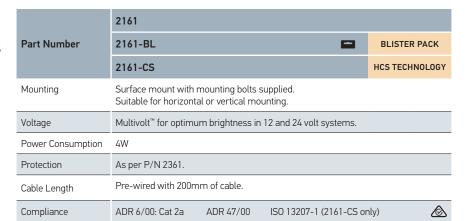

See page 20 for further information on HCS Technology and ISO 13207-1

Jumbo-S LED Reversing Lamp

Jumbo-S LED reversing lamp with inbuilt 23cm² red retro reflector. New low profile design allows surface mounting complete with mounting gaskets and screws.





P/N 1461-BL






Part Number	1461	
Part Number	1461-BL BLISTER PACE	K
Mounting	Surface mount with mounting bolts supplied. Suitable for horizontal or vertical mounting.	
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.	
Power Consumption	4W	
Protection	Reverse polarity and transient spike circuit protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)	
Cable Length	Pre-wired with 200mm of cable.	
Compliance	ADR 1/00 ADR 47/00	®











Part Number	2429-CS	HCS TECHNOLOGY	
Mounting	Surface mount with mounting bolts supplied. Suitable for horizontal or vertical mounting.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	Stop: 5W Rear position: 1W Rear direction indicator: 4W		
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS) IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)		
Cable Length	Pre-wired with 2m of sheathed multi-core cable.		
Compliance	ADR 6/00: Cat 2a ADR 47/00 ADR 49/00 ISO 13207-1	&	
See page 84 for Jumbo-S and Designline accessories.			

Jumbo-S LED Double Module Stop/Rear Position/Rear Direction Indicator Lamp

Jumbo-S LED stop, rear position, rear direction indicator lamp with 23cm² red retro reflectors. Lamps are pre-assembled and wired into housing for easy installation. Features HCS Technology with ISO 13207-1 compliance. (See page 20 for further information on HCS Technology and ISO 13207-1).














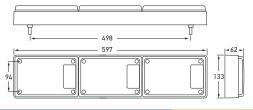

Part Number	2430-CS	HCS TECHNOLOGY
Mounting	As per P/N 2429-CS.	
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.	
Power Consumption	Stop: 5W x 2 Rear position: 1W x 2 Rear direction indicator: 4W	
Protection	As per P/N 2429-CS.	
Cable Length	Pre-wired with 2m of sheathed multi-core cable.	
Compliance	ADR 6/00: Cat 2a ADR 47/00 ADR 49/00 ISO 13207-1	<u>&</u>

Jumbo-S LED Triple Module Stop/ Rear Position/Rear Direction Indicator Lamp

Jumbo-S LED stop, rear position, rear direction indicator lamp with 23cm² red retro reflectors. Lamps are pre-assembled and wired into housing for easy installation. Features HCS Technology with ISO 13207-1 compliance. (See page 20 for further information on HCS Technology and ISO 13207-1).











Part Number	2431-CS			HCS TECHNOLOGY
Mounting	As per P/N 2429-CS.			
Voltage	Multivolt™ for optimum	n brightness in 12 an	d 24 volt systems.	
Power Consumption	Stop Rear position: Rear direction indicato Reversing:	5W 1W r: 4W 4W		
Protection	As per P/N 2429-CS.			
Cable Length	Pre-wired with 2m of sheathed multi-core cable.			
Compliance		DR 6/00: Cat 2a 50 13207-1	ADR 47/00	

Jumbo-S LED Triple Module Stop/ Rear Position/Rear Direction Indicator/Reversing Lamp


Jumbo-S LED stop, rear position, rear direction indicator and reversing lamp with 23cm² red retro reflectors. Lamps are pre-assembled and wired into housing for easy installation. Features HCS Technology with ISO 13207-1 compliance. (See page 20 for further information on HCS Technology and ISO 13207-1).



Designline LED Module Stop/ Rear Position Lamp

Designline LED Multivolt™ module designed to update existing bulb type Jumbo or Designline lamps. Features HELLA Ultra Wide Visibility Optics for significantly improved side visibility.



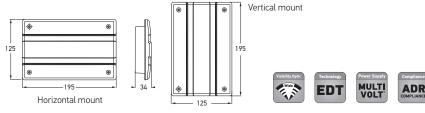

Part Number	2332-Н24	HORIZONTAL	
	2332-V24	VERTICAL	
Mounting	Recess mount.		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.	
Power Consumption	Stop: 6W Rear position: 2W		
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (T	VS).	
Cable Length	Pre-wired with 200mm of cable.		
Compliance	ADR 49/00	<u>&</u>	
See page 84 for Designline accessories.			

Designline LED Module Rear **Direction Indicator Lamp**

Designline LED Multivolt[™] module designed to update existing bulb type Jumbo or Designline lamps. Features HELLA Ultra Wide Visibility Optics for significantly improved side visibility.



	2146-H24	HORIZONTAL	
	2146-V24	VERTICAL	
Part Number	2146-HCS (Incorporates HCS Technology)	HORIZONTAL	
	2146-VCS (Incorporates HCS Technology)	VERTICAL	
Mounting	Recess mount.		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.	
Power Consumption	P/Ns 2146-H24/2146-V24: 6W P/Ns 2146-HCS/2146-VCS: 5W		
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (T	VS).	
Cable Length	Pre-wired with 200mm of cable.		


ADR 6/00: Cat 2a See page 20 for further information on HCS Technology and ISO 13207-1.

Designline LED Module Reversing Lamp

Designline LED Multivolt™ module designed to update existing Designline lamps. The high performance module features 36 High Efficacy LEDs that more than triples the raw lumen output over the standard module. High precision optics ensure ADR compliance by focusing the majority of light down ensuring wide illumination and improved safety when reversing.




www.hella.co.nz



ISO 13207-1 (2146-HCS/...VCS only)

<u> </u>

ADR

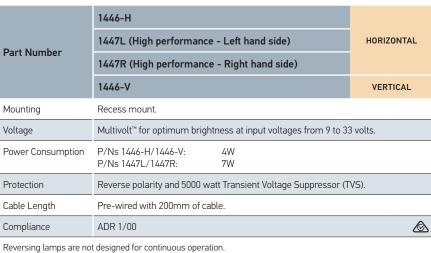


Compliance











Don't Novel or	2426-H		HORIZONTAL
Part Number	2426-V		VERTICAL
Mounting	Surface mount.		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.		
Power Consumption	Stop: Rear position: Rear direction indicator:	6W 2W 6W	
Cable Length	Pre-wired with 2m of multi-	core cable.	
Spare Part	9.2422.09	Double housing	
Compliance	ADR 6/00: Cat 2a	ADR 49/00	<u>&</u>
See page 84 for Designline accessories.			

Designline LED Double Module Stop/Rear Position/Rear Direction Indicator Lamp

Double Designline LED module pre-assembled and wired for easy installation. Features a 2m wiring loom and encapsulated bolts so lamp does not have to be disassembled to mount. Features HELLA Ultra Wide Visibility Optics for significantly improved side visibility.














Part Number	2427-H		HORIZONTAL
Part Number	2427-V		VERTICAL
Mounting	Surface mount.		
Voltage	Multivolt™ for optimum brigi	ntness at input voltages from 9 to 33	3 volts.
Power Consumption	Stop: Rear position: Rear direction indicator:	6W x2 2W x 2 6W	
Cable Length	Pre-wired with 2m of multi-	core cable.	
Spare Part	9.2423.09	Triple housing	
Compliance	ADR 6/00: Cat 2a	ADR 49/00	<u>&</u>

Designline LED Triple Module Stop/Rear Position/Rear Direction Indicator Lamp

Triple Designline LED module pre-assembled and wired for easy installation. Features a 2m wiring loom and encapsulated bolts so lamp does not have to be disassembled to mount. Features HELLA Ultra Wide Visibility Optics for significantly improved side visibility.











Part Number	2428-H			HORIZONTAL
Part Number	2428-V			VERTICAL
Mounting	Surface mount.			
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.			3 volts.
Power Consumption	Stop: Rear position: Rear direction indicato Reverse:	6W 2W or: 6W 4W		
Cable Length	Pre-wired with 2m of	multi-core cable.		
Spare Part	9.2423.09	Triple housing		
Compliance	ADR 1/00	ADR 6/00: Cat 2a	ADR 49/00	&
Reversing lamps are not designed for continuous operation				


Designline LED Triple Module Stop/Rear Position/Rear Direction Indicator/Reversing Lamp



Jumbo LED Module Stop/ Rear Position Lamp with Red **Retro Reflector**

Jumbo LED Multivolt $^{\scriptscriptstyle{\text{TM}}}$ module designed to update existing Jumbo or Designline lamps with Enhanced Definition Technology (EDT). Reflector area 33cm².











174	· · · · · · · · · · · · · · · · · · ·
Part Number	2317
Mounting	Recess mount. Suitable for horizontal or vertical mounting.
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.
Power Consumption	Stop: 6W Rear position: 2W
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS).
Cable Length	Pre-wired with 200mm of cable.
Compliance	ADR 47/00 ADR 49/00
See page 84 for Designl	ine accessories.

Jumbo LED Module Rear Direction Indicator Lamp with **Red Retro Reflector**

Jumbo LED Multivolt™ module designed to update existing Jumbo or Designline lamps. Reflector area 33cm².







Part Number	2138	
Mounting	Recess mount. Suitable for horizontal or vertical mounting.	
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.	
Power Consumption	9W	
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS).	
Cable Length	Pre-wired with 200mm of cable.	
Compliance	ADR 6/00: Cat 2a ADR 47/00	&









110mm Round LED Front Direction Indicator Lamp - Amber Lens

LED front direction indicator specifically designed for trucks, buses and motor homes.




Part Number	2135LED	BLACK BASE	
Part Number	2105	MODULE	
Mounting	Surface mount only with lens engraving "TOP" located correctly.		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.		
Power Consumption	4W		
Protection	Reverse polarity and 1500 watt Transient Voltage Suppressor (TVS) IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)		
Cable Length	Pre-wired with 200mm of cable.		
Compliance	ADR 6/00: Cat 1	&	









Front position Direction indicator

Part Number	2131-CS	HCS TI	ECHNOLOGY		
Mounting	Surface mount only with lens engraving "TOP" located correctly.				
Voltage	Multivolt™ for optimum	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.			
Power Consumption	Front position: <1W Front direction indicator: 3W				
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS). IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)				
Cable Length	Pre-wired with 200mm of cable.				
Compliance	ADR 6/00: Cat 1 ECE R7/02	ADR 49/00 ©24 5851	ECE R6/01 ISO 13207-1		

See page 20 for further information on HCS Technology and ISO 13207-1. Diagram as per P/N 2135LED


110mm Round LED Front Position/ Front Direction Indicator Lamp -Clear Lens

LED front direction indicator and front position lamp specifically designed for commercial transport, buses, caravans and trailers. Direction indicator optic appears clear until illuminated.







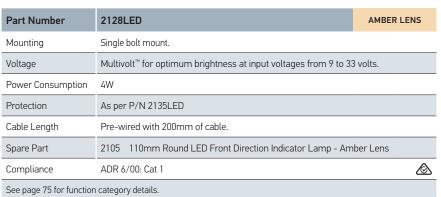

LED Front Direction Indicator Lamp

Single-sided LED front direction indicator fitted with high-intensity LED insert and black housing. Fully sealed to withstand high-pressure washing.



110mm Round LED Stop/ Rear Position Lamp

110mm round LED stop, rear position lamp specifically designed for commercial transport, buses, caravans and trailers. Features low power consumption and impact resistant acrylic lens.



















ADR

ADR

DidCk pase	CITOTTIE base	
	2359	CHROME BASE
Part Number	2367	BLACK BASE
	2365	MODULE
Mounting	Surface mount only with lens engraving "TOP" located correctly.	
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.
Power Consumption	Stop: 3W Rear position: 1W	
Protection	Reverse polarity and 1500 watt Transient Voltage Suppressor (T IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion	
Cable Length	Pre-wired with 200mm of cable.	
Compliance	ADR 49/00	<u>&</u>

110mm Round LED Rear Direction Indicator Lamp







P/N 2167 P/N 2165

	2159	CHROME BASE		
Part Number	2167	BLACK BASE		
	2165	MODULE		
Mounting	Surface mount only with lens engraving "TOP" located correctly.			
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.			
Power Consumption	3W			
Protection	As per P/N 2359.			
Cable Length	Pre-wired with 200mm of cable.			
Compliance	ADR 6/00: Cat 2a			

See page 20 for further information on HCS Technology and ISO 13207-1.

110mm Round LED Reversing Lamp







P/N 1467 P/N 1465

		COMPLIANCE	
	1459	CHROME BASE	
Part Number	1467	BLACK BASE	
	1465	MODULE	
Mounting	Surface mount only with lens engraving "TOP" located correctly.		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.	
Power Consumption	5W		
Protection	As per P/N 2359.		
Cable Length	Pre-wired with 200mm of cable.		
Compliance	ADR 1/00	&	
Reversing lamps are no	t designed for continuous operation.		















Part Number	2108-GMD				12 VOL	Т
Part Number	2108-GMD24V			24 VOL	Т	
Mounting	Surface mount. Single	bolt 1/4" stainle	ss UNC th	read. Nut and wa	asher supplie	d.
Power Consumption	Safety DayLights [™] : Front position: Front direction indicate	4W 1W	08-GMD	P/N 2108-GMD 4W 1W 4W	24V	
Protection	Reverse polarity and transient spike circuit protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)					
Cable Length	Pre-wired with 2.5m o	Pre-wired with 2.5m of sheathed multi-core cable.				
Lens Material	High impact and chemical resistant Grilamid® lens					
Compliance	ADR 6/00: Cat 1	ADR 49/00 ECE R6/01	ADR 76		R87/00	<u>&</u>
See page 84 for mounti	ng accessories. See page '	99 for Safety Dayl	_ight™ Ver	sions		

DayLights[†]

E R87/00 💩

83mm Round LED Safety DayLights™/Front Position/ Front Direction Indicator Lamp

This LED combination lamp features an integrated Safety DayLight™, front position and front direction indicator function. The lamp features a traditional round lens that illuminates with a distinctive ring of white LEDs when used as a Safety DayLight™. This lamp eliminates the need for installation of multiple lamps. Front position lamp and front direction indicator will extinguish the Safety DayLight™ automatically.



indicator







Part Number	2107
Mounting	Surface mount. Single bolt 1/4" stainless UNC thread. Nut and washer supplied.
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.
Power Consumption	4W
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS) IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.
Compliance	ADR 6/00: Cat 1

83mm Round LED Front Direction Indicator Lamp

Compact, low profile LED front direction indicator fitted with amber polycarbonate lens. Fully sealed to withstand high-pressure washing.




83mm Round LED Stop/Rear Position Lamp

83mm diameter LED stop, rear position lamp with single bolt mount, featuring Enhanced Definition Technology (EDT). Features HELLA Ultra Wide Visibility Optics for significantly improved side visibility.





P/N 2390 Rear position P/N 2390-BL











	2390	
Part Number	2390-BL	BLISTER PACK
	2390-BULK	PACK OF 10
Mounting	Surface mount. Single bolt 1/4" stainless UNC thread. Nut and w	vasher supplied.
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.
Power Consumption	Stop: 3W Rear position: 1W	
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (T IP 6K7 (Protection against dust and temporary water immersion IP 6K9K (Protection against dust and high-pressure/steam jet c	1)
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.	
Compliance	ADR 49/00	&
See page 84 for mounting	ng accessories.	

83mm Round LED Rear Direction Indicator Lamp

83mm diameter LED rear direction indicator lamp with single bolt mount. Features HELLA Ultra Wide Visibility Optics for significantly improved side visibility.





P/N 2130-BL







ADR

	2130			
Part Number	2130-BL	BLISTER PACK		
	2130-BULK	PACK OF 10		
Mounting	Surface mount. Single bolt 1/4" stainless UNC thread. Nut and washer supplied.			
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.			
Power Consumption	2W			
Protection	As per P/N 2390.			
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.			
Compliance	ADR 6/00: Cat 2a E4 11391 ECE R6/01			
Contact HELLA for 24 volt HCS version.				


83mm Round LED Reversing Lamp

83mm diameter LED reversing lamp with single bolt mount.





P/N 1490-BL

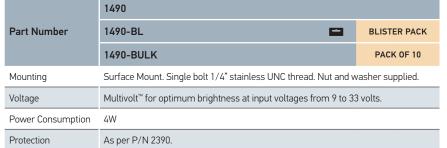

ECE R23/00

Pre-wired with 2.5m of sheathed multi-core cable.

Compliance ADR 1/00 (EA) 11391

Reversing lamps are not designed for continuous operation.



Cable Length








ADR 6/00: Cat 2a

Contact HELLA for 24 volt HCS version. See page 84 for mounting accessories.

(E9) 1538



83mm Round LED Stop/ Rear Position/Rear Direction Indicator Lamp

83mm diameter LED stop, rear position and rear direction indicator lamp with single bolt mount.





P/N 2399-BL


	2399				
Part Number	2399-BL	BLISTER PACK			
	2399-BULK	PACK OF 10			
Mounting	Surface mount. Single bolt 1/4" stainless UNC thread. Nut and washer supplied.				
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.				
Power Consumption	Stop: 3W Rear position: 1W Rear direction indicator: 3W				
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS) IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)				
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable. Bulk pack pre-wired with 6m of sheathed multi-core cable.				

ADR 49/00

ECE R6/01



Compliance



ECE R7/02

-	33 -
: A	90
* (9)	îll
_//	

Part Number	2934Н	HORIZONTAL
	2934V	VERTICAL
Mounting	Utilises bolt mount from 83mm round lamps.	
Compliance	ADR 47/00	

Red Retro Reflector Base

Red retro reflector to suit 83mm round lamps. Reflector area 31.7cm².



ADR COMPLIANCE



Part Number	2399-TP		-
Kit Contents	Each trailer lamp kit contains:		
	2 x 2399	Combination stop/rear position and rear direction indicator lamp with 6m cable	
	2 x 2934H	Red retro reflector base – horizontal mount	
	1 x 2559 1 x 4921	LED number plate lamp 7 pole flat plug	

LED Lighting Trailer Conversion Kit

A complete Fit and Forget solution for small trailers.



LED Front Direction Indicator Lamp - Surface Mount

Surface mount LED front direction indicator lamp that is designed with an ultra wide visibility optic for significantly improved side visibility. Featuring a low profile, ultra durable Grilamid® nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.






Ultra slim height of only 11mm. Lamp shown active.



P/N 2109-BL












	HORIZONTAL MOU	NT			
	2109	12 VOLT			
	2109-BL (Blister	Pack)		12 VOLI	
	2109-24V				
5	2109-24VBL (Bli	ster Pack)		24 VOLT	
Part Number	VERTICAL MOUNT				
	2109V			40.00-	
	2109V-BL (Blister Pack)			12 VOLI	
	2109V-24V				
	2109V-24VBL (Blister Pack)				
Mounting	Suitable for horizontal and vertical mounting with tolerance. See diagrams.				
Power Consumption	3W				
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)				
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable. (Blister packs with 0.5m cable)				
Lens Material	High impact and chemical resistant Grilamid® lens				
Spare Parts	9.2652.09 White screw caps (Pack of 4) 9.1009.09 Charcoal screw caps (Pack of 4) 9.1009.10 Chrome plated screw caps (Pack of 4)				
Compliance	ADR 6/00: Cat 1 Horizontal (22) 5869 Vertical (22) 5890 ECE R6/01				
See page 59 for surface	mount strip lamp scre	ew caps.			

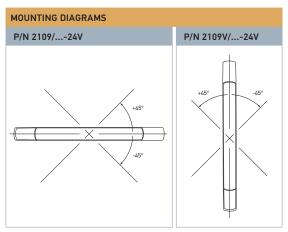

Horizontal mount: $\pm -45^{\circ}$ rotation around lamp (and vehicle) axis

Vertical mount: +/- 45° rotation around lamp (and vehicle) axis









Part Number	5245			12 VOLT
Part Number	5245-24V		24 VOLT	
Mounting	Suitable for horizon	tal or vertical mounting with tolera	ance. See d	diagrams.
Power Consumption	3W			
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)			
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.			
Lens Material	High impact and chemical resistant Grilamid® lens			
Spare Parts	9.2652.09 White screw caps (Pack of 4) 9.1009.09 Charcoal screw caps (Pack of 4) 9.1009.10 Chrome plated screw caps (Pack of 4)			
Compliance	ADR 49/00: Cat S3	£24 02 0087	ECE R7/02	2

LED High Level Brake Lamp - Surface Mount

Surface mount LED high level brake lamp that is designed with an ultra wide visibility optic to suit a wide range of mounting positions and angles. Featuring a low profile, ultra durable Grilamid® nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.





Ultra slim height of only 11mm. Lamp shown active.







	HORIZONTAL MOUNT			
	1468		12 VOLT	
	1468-BL (Blister Pack)		12 VOLT	
Don't Noveleau	1468-24V	1468-24V		
Part Number	1468-24VBL (Blister Pack)			
	VERTICAL MOUNT			
	1468V		12 VOLT	
	1468V-24V	1468V-24V		
Cable Length	Pre-wired with 2.5m of shea	Pre-wired with 2.5m of sheathed multi-core cable. (Blister packs with 0.5m cable)		
Compliance	Horizontal (24) 0027 Vertical (24) 0028 ECE R23/00			

Other specifications as per P/N 5245.

Reversing lamps are not designed for continuous operation.

LED Reversing Lamp


- Surface Mount

Surface mount LED reversing lamp. Featuring a low profile, ultra durable Grilamid® nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.





Ultra slim height of only 11mm. Lamp shown active.

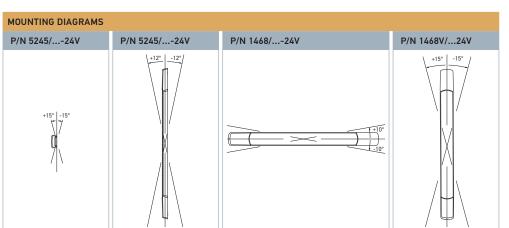

Horizontal mount: +/- 15° tilt (up/down)

Vertical mount: +/- 12° tilt (up/down)

Horizontal mount: +/- 10° rotation around lamp (and vehicle) axis

Vertical mount: +/- 15° rotation around lamp (and vehicle) axis

P/N 1468-BL

ADR

GMD

ECE R6/01

LED Stop/Rear Position Lamp - Surface Mount

Surface mount LED stop/rear position lamp that features Enhanced Definition Technology (EDT) and is designed with an ultra wide visibility optic for significantly improved side visibility. Featuring a low profile, ultra durable Grilamid® nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.






Ultra slim height of only 11mm. Lamp shown active.



P/N 2318-BL

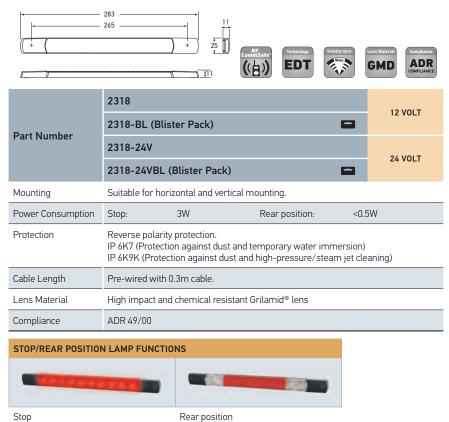

LED Rear Direction Indicator Lamp - Surface Mount

Surface mount LED rear direction indicator lamp that is designed with an ultra wide visibility optic for significantly improved side visibility. Featuring a low profile, ultra durable Grilamid® nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.







Ultra slim height of only 11mm. Lamp shown active.



P/N 2168-BL

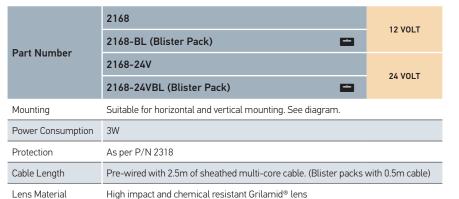

(£24) 5891



ADR 6/00: Cat 2a


Compliance

Horizontal mount & Vertical mount: 360° rotation around lamp (and vehicle) axis









Part Number	2375-12V	12 VOLT		
Part Number	2375-24V	24 VOLT		
Mounting	Suitable for horizontal and vertical mounting.			
Power Consumption	Stop: 2W Rear position: <0.5W Rear direction indicator: 2W			
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)			
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.			
Lens Material	High impact and chemical resistant Grilamid® lens			
Spare Parts	9.2652.09 White screw caps (Pack of 4) 9.1009.09 Charcoal screw caps (Pack of 4) 9.1009.10 Chrome plated screw caps (Pack of 4)			
Compliance	ADR 49/00 ADR 6/00: Cat 2a 🔯 5902 ECE6/01 EC	CE 7/02		

LED Stop/Rear Position/Rear Direction Indicator Lamp

- Surface Mount

The slim Surface Mount Strip lamp is now available as a combination stop/tail and indicator light making it the most compact and certified STI lamp available. Featuring a low profile, ultra durable Grilamid® nylon lens for extreme impact, UV, chemical and stress resistance. Optic appears clear until illuminated.





Ultra slim height of only 11mm.

Stop Rear position Rear direction indicator Rear direction indicator

Surface Mount Strip Lamp - Screw Caps

SURFACE MOUNT STRIP LAMP SCREW CAPS			
Part Number	Colour	Quantity	
9.1009.09	CHARCOAL		
9.2652.09	WHITE	PACK OF 4	
9.1009.10	CHROME PLATED		



P/N 9.1009.10

LED Stop/Rear Position Lamp

Red LED strip lamp suitable for coaches and buses, featuring Enhanced Definition Technology (EDT).









Don't Novel on	2334-12V	12 VOLT
Part Number	2334-24V	24 VOLT
Mounting	Two hole recess mount. Suitable for horizontal or vertical mounting.	
Power Consumption	Stop: 2W Rear position: 0.3W	
Protection	Reverse polarity protection.	
Cable Length	Pre-wired with 300mm of cable.	
Spare Part	9.5243.05 Gasket	
Compliance	ADR 49/00	

LED Rear Direction Indicator Lamp

Amber LED strip lamp suitable for coaches and buses.







Part Number	2156-12V	12 VOLT	
	2156-24V	24 VOLT	
Mounting	Two hole recess mount. Suitable for horizontal or vertical mounting.		
Power Consumption	2W		
Protection	Reverse polarity protection.		
Cable Length	Pre-wired with 0.5m of sheathed multi-core cable.		
Spare Part	9.5243.05 Gasket		
Compliance	ADR 6/00: Cat 2a		

LED High Level Brake Lamp

Strip LED lamp designed for rear spoiler applications. Clear lens version optic appears clear until illuminated.





P/N 5243-CLEAR

	RED LENS	CLEAR LENS		
Part Number	5243	5243-CLEAR	12 VOLT	
	5243-24V	5243-24VCLEAR	24 VOLT	
Mounting	Two hole recess mount. Suitable for horizontal or vertical mounting.			
Power Consumption	2W			
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)			
Cable Length	Pre-wired with 2.5m of multi-core cable.			
Spare Part	9.5243.05 Gasket			
Compliance	ADR 49/00: Cat S3			







	5237 (Coupe)	20° - 36°	
Part Number	5238 (Sedan)	37° - 56°	12 VOLT
	5239 (Wagon)	57° - 80°	
Mounting	Adhesive mounting tape to glass.		
Voltage	12V		
Power Consumption	3W		
Cable Length	Pre-wired with 2.5m of multi-core cable.		
Compliance	ADR 49/00: Cat S3		

LED High Level Brake Lamp

Designed for rear windows of angles from 20° (Coupe) to 80° (Wagon). Supplied with installation kit and instruction sheet. Optic appears clear until illuminated.



P/N 5237 Shown illuminated






P/N 5238


P/N 5239


















Part Number	2XS 205 020-041 12 VOLT		
Mounting	Vertical surface mount only at rear of caravan.		
Power Consumption	0.5W		
Cable Length	Pre-wired with 500mm multi-core cable.		
Compliance	ECE R7/02		




LED Caravan Red/White Clearance Lamp

Red/white side-rear clearance lamp for fitment at the rear of caravans. Combined front end outline (white) and rear end outline (red) lamps. LED replacement lamp for older bulb style lamps.



LED Recess Mount Front Position/ End Outline Lamp

White front position or front end outline LED lamp. Optic appears clear until illuminated.















P/N 2055

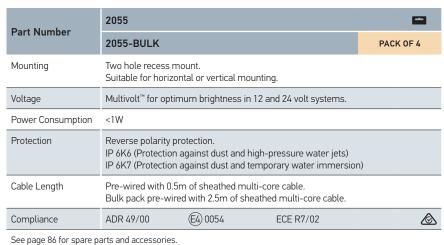

LED Recess Mount Front End Outline Lamp

Amber front end outline LED lamp for trailers only. Optic appears clear until illuminated.





Part Number


Mounting

Compliance

2056

2056-BULK

ADR 49/00




Other specifications as per P/N 2055. See page 86 for spare parts and accessories.

Suitable for horizontal mounting.

LED Recess Mount Cab Marker Lamp

Amber cab marker LED lamp. Optic appears clear until illuminated.












u	

Part Number	2057	
Part Number	2057-BULK	PACK OF 4
Mounting	Suitable for horizontal mounting.	
Compliance	ADR 45/01	<u>&</u>
Other specifications as	per P/N 2055. See page 86 for spare parts and accessories.	

LED Recess Mount Rear Position/ **End Outline Lamp**

Red rear end outline lamp or rear position LED lamp. Optic appears clear until illuminated.












Part Number	2308	2308		
	2308-BULK			PACK OF 4
Compliance	ADR 49/00	E4) 02 7597	ECE R7/02	&
Other an arifications	D/N 20FF C	0/ fau amana manta		





LED Side Marker Lamp - Amber


LED side marker lamp with reflex reflector for horizontal mounting. Reverse polarity protection.



Part Number	2PS 008 645	12 VOLT		
rai (Nullibei	2PS 008 645	24 VOLT		
Power Consumption	12V 24V	0.5W 1W		
Cable Length	Pre-wired with 1.5m of sheathed multi-core cable.			
Compliance	E1) 1395	E1) 1396	ECE R3/02	ECE R91/00







David Nameda an	2PS 345 600-001					12 VOLT	
Part Number 2PS 345 600-011					24 VOLT		
Power Consumption	12V DC	0.7W		24VDC	1.3W		
Protection	Fully sealed ag	Fully sealed against dust, high-pressure washing/steam jet cleaning					
Cable Length	Pre-wired with 0.5m of sheathed multi-core cable.						
Compliance	ADR 74/00: Cat	. SM1	ADR 47/00	£24 5881	ECE R3/02	ECE R91/00 💩	


LED Side Marker Lamp - Amber

LED side marker with inbuilt amber retro reflector. Bridge circuit for protection against polarity reversal.










Deut Neuelleu	2305	12 VO	LT			
Part Number	2306				24 VOI	LT
Power Consumption	12V DC	0.5W	24V E	DC 1W		
Protection	Fully sealed a	Fully sealed against dust, high-pressure washing/steam jet cleaning				
Cable Length	Pre-wired with 5m of sheathed multi-core cable.					
Compliance	ADR 47/00	ADR 49/00	£24 5881	ECE R3/02	ECE R7/02	&

LED Rear Position Lamp - Red

LED rear position lamp with inbuilt red retro reflector. Bridge circuit for protection against polarity reversal.



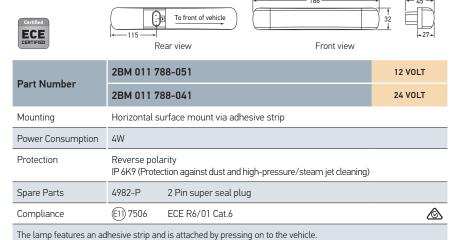

LED Auxiliary Side Indicator Cat. 6

LED side indicator lamp approved for heavy vehicles and buses/coaches, sealed against dust and water, it will provide many years of trouble free usage. Optic appears clear until illuminated.





Rear view showing super seal connector



LED TRUCK AND TRAILER LIGHTING

SUPERIOR SAFETY AND RELIABILITY
















_	47	-
		1 1
		100
	بلك	*

	2397	12 VOLT		
Part Number	2397-BULK (Pack of		12 VULI	
	2397-24V	24 VOLT		
	2397-24VBULK (Pack	c of 10)		24 VOLI
Mounting	Surface mount.			
Bulbs to Suit	Stop: Rear position: Rear direction indicator:	12V K1221 L125 K1221	24V K2421 L245 K2421	
Spare Part	9.2397.01	Lens		
Compliance	ADR 6/00: Cat 2a	ADR 47/00	ADR 49/00	


Stop/Rear Position/Rear Direction Indicator Lamp with Retro Reflector

Suitable for insulated earth circuits. Shallow body. Retro reflector area 32cm^2 .









			225	
Part Number	2VP 343 640-0	27		RIGHT HAND SIDE
Part Number	2VP 343 640-0	37		LEFT HAND SIDE
Mounting	Surface mount. Suitable for horiz	ontal or vertical m	ounting.	
Bulbs to Suit	Stop: Rear position: Rear direction inc Reversing:	12V R1221 G1210 dicator: R1221 R1221	24V R2421 G2410 R2421 R2421	
Compliance	€17) 0303	ECE R6/01	ECE R7/02	ECE R23/00

Stop/Rear Position/Rear Direction Indicator/Reversing Lamp


Suitable for light trailer, agricultural and construction vehicles.



Stop/Rear Position/Rear Direction Indicator/Reversing Lamp

For mobile homes. With reversing light and round reflector.










Part Number	2VP 341 419-127				RIGHT HAND SIDE
rait Nullibei	2VP 341 419-137	LEFT HAND SIDE			
Mounting	Horizontal flush mount i	nto body.			
Bulbs to Suit	Stop/Rear position: Rear direction indicator: Reversing:	12V S1221/5V R1221 R1221	24V S2421/5 R2421 R2421	5V	
Compliance	(E4) 9836 ECE R6/	/01 E	CE R7/02	ECE R23/00	D ECE R3/02

Rear Combination Lamp to suit MAN 93-03/Scania 88-96

Combination rear lamp with stop, rear position, reversing, rear direction indicator, rear fog functions and reflex reflector.








Part Number	2VP 008 204-061					
Mounting	Two bolt mount (bolts s	Two bolt mount (bolts supplied).				
Bulbs to Suit	Stop: Rear position: Rear direction indicator: Reversing: Fog:	12V R1221 G125 x 3 R1221 R1221 R1221	24V R2421 G245 x 3 R2421 R2421 R2421			
Spare Part	9EL 152 889-001	Lens and gasket				
Compliance	E4 9808 E4 98 ECE R6/01 ECE R7					







Designline Stop/Rear Position Lamp with Retro Reflector

Single bulb holder. Suitable for insulated earth circuits. Reflector area 35cm².



Part Number	2321		12 VOLT	
Part Number	2321-24V	24 VOLT		
Mounting		Recess mount with 78 x 145mm opening. Suitable for horizontal or vertical mounting.		
Bulbs to Suit	12V 24V	S1221/5V S2421/5V		
Compliance	ADR 47/00	ADR 49/00		

ADR COMPLIANCE



Part Number	2145	12 VOLT	
Part Number	2145-24V	24 VOLT	
Mounting	Recess mount with 78 x 145mm opening. Suitable for horizontal or vertical mounting.		
Bulbs to Suit	12V R1221 24V R2421		
Compliance	ADR 6/00: Cat 2a		

Designline Rear Direction Indicator Lamp

Single bulb holder. Suitable for insulated earth circuits.







Don't Name have	2046	12 VOLT
Part Number	2046-24V	24 VOLT
Mounting	Recess mount with 78 x 145mm opening. Suitable for horizontal or vertical mounting.	
Bulbs to Suit	12V R1221 24V R2421	
Compliance	ADR 1/00	

Designline Reversing Lamp

Single bulb holder. Suitable for insulated earth circuits.




SPARE PARTS	FOR	DESIGNI INF	RECESS	MOUNTI	AMPS

9.2320.01	Red lens
9.2144.01	Amber lens
9.2041.01	Clear lens
9.2043.05	Lens or base gasket
9.2046.09-BULK	Housing
9.2320.08	Double contact bulb holder (includes 12V bulb)
9 2320 08-24V	Double contact bulb holder (includes 24V bulb)

Designline Stop/Rear Position Lamp with Retro Reflector

Single bulb holder. Suitable for insulated earth circuits. Reflector area $35 \mathrm{cm}^2$.









Part Number	2320		12 VOLT
Part Number	2320-24V	2320-24V	
Mounting	Surface mount. Suitable for hori:	Surface mount. Suitable for horizontal or vertical mounting.	
Bulbs to Suit	12V 24V	S1221/5V S2421/5V	
Compliance	ADR 47/00	ADR 49/00	

Designline Rear Direction Indicator Lamp

Single bulb holder. Suitable for insulated earth circuits.



Part Number	2144	12 VOLT
Part Number	2144-24V	24 VOLT
Mounting	Surface mount. Suitable for horizontal or vertical mounting.	
Bulbs to Suit	12V R1221 24V R2421	
Compliance	ADR 6/00: Cat 2a	

Designline Reversing Lamp

Single bulb holder. Suitable for insulated earth circuits.



Part Number	2041	12 VOLT
Part Number	2041-24V	24 VOLT
Mounting	Surface mount. Suitable for horizontal or vertical mounting.	
Bulbs to Suit	12V R1221 24V R2421	
Compliance	ADR 1/00	









Designline Stop/Rear Position/
Rear Direction Indicator Lamp
with Retro Reflector


Suitable for insulated earth circuits.



Don't Novel or	2422			12 VOLT
Part Number	2422-24V			24 VOLT
Mounting	Surface mount. Suitable for horizontal or	r vertical mounting		
Bulbs to Suit	Stop/rear position: Rear direction indicator:	12V S1221/5V R1221	24V S2421/5V R2421	
Compliance	ADR 6/00: Cat 2a	ADR 47/00	ADR 49/00	

ADR COMPLIANCE





Dout Number	2423			12 VOLT
Part Number	2423-24V			24 VOLT
Mounting	Surface mount. Suitable for horizontal or	r vertical mounting	l.	
Bulbs to Suit	Stop/rear position: Rear direction indicator:	12V S1221/5V R1221	24V S2421/5V R2421	
Compliance	ADR 6/00: Cat 2a	ADR 47/00	ADR 49/00	

Designline Stop/Rear Position/ Rear Direction Indicator Lamp with Retro Reflector

Suitable for insulated earth circuits.







Part Number	2424			12 VOLT
Part Number	2424-24V			24 VOLT
Mounting	Surface mount. Suitable for horizontal or	r vertical mounting		
Bulbs to Suit	Stop/rear position: Rear direction indicator: Reversing:	12V S1221/5V R1221 R1221	24V S2421/5V R2421 R2421	
Compliance	ADR 1/00 ADR	6/00: Cat 2a	ADR 47/00	ADR 49/00

Designline Stop/Rear Position/ Rear Direction Indicator/Reversing Lamp with Retro Reflector

Suitable for insulated earth circuits.



SPARE PARTS FOR DESIGNLINE SURFACE MOUNT LAMPS

9.2320.01	Red lens
9.2144.01	Amber lens
9.2041.01	Clear lens
9.2043.05	Lens gasket
9.2041.09-BULK	Single Module Housing
9.2422.09	Double Module Housing
9.2423.09	Triple Module Housing

Stop Lamp

Single bulb holder.











Part Number	2303			
Bulbs to Suit	12V 24V	K1221 K2421		
Compliance	ADR 49/00			

Front Direction Indicator Lamp

Single bulb holder.







Part Number	2100	
Bulbs to Suit	12V 24V	K1221 K2421
Compliance	ADR 6/00: Cat 1a	

Front Position/End Outline Lamp

Single bulb holder.







Part Number	2000	
Bulbs to Suit	12V 24V	L125 L245
Compliance	ADR 49/00	

Reversing Lamp


Single bulb holder.



Part Number	1407			
Bulbs to Suit	12V 24V	K1221 K2421		
Compliance	ADR 1/00			







Stop/Rear Position/Number Plate Lamp

Suitable for insulated earth circuits.



Part Number	2384				
Bulbs to Suit	Stop: Rear position/Num	12V R1221 aber plate: L125	24V R2421 L245		
Compliance	ADR 48/00 ECE R4/00	ADR 49/00 ECE R7/02	E1) 31 453	(E1) 53 210	





Part Number	2147		
Bulbs to Suit	12V 24V	R1221 R2421	
Compliance	ADR 6/00: Cat 2a	E1) 32 619	ECE R6/01

Rear Direction Indicator Lamp







Part Number	2148			
Bulbs to Suit	12V 24V	R1221 R2421		
Compliance	ADR 6/00: Cat 1a	E1) 32 661	ECE R6/01	

Front Direction Indicator Lamp







Part Number	2064		
Bulbs to Suit	12V 24V	L125 L245	
Compliance	ADR 49/00	E1) 11 793	ECE R7/02

Front Position/End Outline Lamp








Part Number	1405		
Bulbs to Suit	12V 24V	R1221 R2421	
Compliance	ADR 1/00	E1) 8703	ECE R23/00

Reversing Lamp





The lamp features a reflector with a high quality facet pattern and a clear lens. Optimised light output, making applications behind outer cover lenses possible.

Mounting

Bulb to Suit

Compliance

12V

24V

(E4) 7613

Mounting depth of 80mm. The standard version is designed to be mounted with a screw fitting from the rear. If required the lamp can be fitted from the front using an optional mounting plate. Simplified electrical connection via a two or three pin plug (not supplied).

Stop/Rear Position Lamp



			Bulb Included 12 W BULB INC	ECE CERTIFIED
Part Number	2SB 009 001-061			

S1221/5V

S2421/5V

ECE R7/02

Rear Direction Indicator Lamp







Part Number	2BA 009 001-001		
Bulb to Suit	12V 24V	RY1221 RY2421	
Compliance	E4) 6546	ECE R6/01	

Front Direction Indicator Lamp







Part Number	2BA 009 001-071		
Bulb to Suit	12V 24V	RY1221 RY2421	
Compliance	E4) 6546	ECE R6/01	

Front Position Lamp



Part Number	2PF 009 001-081		
Bulb to Suit	12V 24V	S1221/5V S2421/5V	
Compliance	E4 7613	ECE R7/02	

Reversing Lamp



Part Number	2ZR 009 001-011		
Bulb to Suit	12V 24V	R1221 R2421	
Compliance	E4) 23 255	ECE R23/00	











Rear Reflex Reflector

This reflector is designed to match the clear glass lamps. All the accessories and holders can be used.



Part Number	8RA 009 001-03	1
Mounting		43mm. The standard version is for screw fitting from behind. If tor can be fitted from the front using an optional mounting plate.
Compliance	E4 3189	ECE R3/02

66mm Accessories

Accessories to suit 66mm lamps.

Part Number	DESIGN RING FOR 66MM MODULES (OPTIONAL)		
	9HB 161 122-007	SILVER	
Mounting	Pushes over front of 66mm lamp and locks into place.		

Part Number	MOUNTING PLATE		
Part Number	9XD 161 119-007	BLACK	
Mounting	For front mounting of 66mm lamps.		

Part Number	TWO POLE PLUG (WITH TERMINALS AND SEALS)
Part Number	8JD 156 150-807
To Suit	2BA 009 001-001/071 and 2ZR 009 001-011

Part Number	THREE POLE PLUG (WITH TERMINALS AND SEALS)
Part Number	8JD 162 581-802
To Suit	2SB 009 001-061 and 2PF 009 001-081



P/N 9HB 161 122-007




P/N 9XD 161 119-007



P/N 8JD 156 150-807







LED Ring Stop/Rear Position Lamp

LED ring lamp suitable for use with 60mm lamps, 16 LEDs for rear position function and 8 LEDs for stop function. Clear lens.






P/N 9HB 163 085-012

		ø112 -	—————————————————————————————————————
Part Number	2SB 009 362-02	1	12 VOLT
	DESIGN RING FOR LED RING LAMP (OPTIONAL)		
	9HB 163 085-012		CHROME
Mounting	Screw mount from Design ring pushes	rear. s over front of 112mm lamp and locks into p	place.
Voltage	12V		
Current Draw	Stop: Rear position:	2.3W 0.1W	
Cable Length	Pre-wired with 250	mm of cable and 3 pole super seal socket.	
Compliance	E4) 7746	ECE R7/02	

Front Direction Indicator Lamp (Cat. 1)

Universal flush mount front direction indicator lamp ideal for coach or bull-bar applications.











Part Number	2101
Mounting	Flush mount. Suitable for left and right hand mounting.
Bulbs to Suit	12V R1221 24V R2421
Compliance	ADR 6/00: Cat 1

Front Direction Indicator/ Supplementary Side Direction Indicator Lamp (Cat.1 and 5)

Double-sided direction indicator lamp.












Part Number	2127	
Mounting	Single bolt mount.	
Bulbs to Suit	12V 24V	R1221 R2421
Additional Function	Supplementary side direction indicator lamp where 12V (G125) or 24V (G245) bulbs are used.	
Compliance	ADR 6/00: Cat 1	ADR 6/00: Cat 5

Supplementary Side Direction Indicator Lamp (Cat. 6)

Single bulb holder.










Part Number	2142	
Mounting	Surface mount	
Bulbs to Suit		R1221 R2421
Compliance	ADR 6/00: Cat 6	









•	4 5 25	2 → ₹	
		0	1
			78
		9	1

Part Number	2155 (Clear lens	s)	12 VOLT
	2155-24V (Amber lens)		24 VOLT
Bulbs to Suit	12V 24V	RY1221 R2421	
Spare Part	9.2155.05	Wiring harness set	
Compliance	ADR 6/00: Cat 6		
Arrow on lens must face direction of travel.			

Supplementary Side Direction Indicator Lamp (Cat. 6)

Side mounted direction lamp suitable for either left or right hand mounting.





P/N 2155-24V









Part Number	2153		LEFT HAND SIDE
	2154		RIGHT HAND SIDE
Mounting	Surface mount.		
Bulbs to Suit	12V 24V	R1221 R2421	
Compliance	ADR 6/00: Cat 6		
Arrow on lens must face direction of travel.			

Supplementary Side Direction Indicator Lamp (Cat. 6)

Side mounted direction indicator lamp with rubber base. Suitable for insulated earth circuits.











Part Number	2066		
Mounting	Surface mount.		
Bulbs to Suit	12V 24V	G1210 G2410	
Compliance	ADR 49/00	E1) 32 /691	ECE R7/02

Front Position/Front End Outline Lamp - White

Fitted with polycarbonate lens and single bulb holder.



ADR CATEGORIES OF DIRECTION INDICATORS


ADR compliant indicators are categorised according to their intended function.

Category 1	Direction indicators for the front of the vehicle.
Category 2	Direction indicators for the rear of the vehicle.
Category 5	Supplementary side direction indicators for use on a vehicle also equipped with categories 1 and 2 direction indicators.
Category 6	Supplementary side direction indicators for use on a heavy vehicle also equipped with categories 1 and 2 direction indicators.

Refer to page 336 for ADR reference guide.

Number Plate Lamp











Part Number	2553			12 VOLT
Part Number	2553-24V			24 VOLT
Bulbs to Suit	12V 24V	G1210 G2410		
Compliance	ADR 48/00	E1) 22819	ECE R4/00	

Number Plate Lamp












Part Number	2555		
Mounting	Two bolt mount.		
Bulbs to Suit	12V 24V	L125 L245	
Compliance	ADR 48/00	E1) 12815	ECE R4/00
Two lamps required for	ADR compliance.		

Number Plate Lamp

Fitted with two bulb holders.











Part Number	2557		12 VOLT
Part Number	2557-24V		24 VOLT
Bulbs to Suit	12V 24V	HL124 x 2 HL244 x 2	
Compliance	ADR 48/00		

Reversing Lamp

Reversing lamp with single bulb holder. For 24V applications, please install bulb P/N R2421











Part Number	1413			12 VOLT
Bulbs to Suit	12V 24V	R1221 R2421		
Compliance	ADR 48/00	E1) 8708	ECE 23/00	

9.2319.	JUMBO LAMP SPARE PARTS		
	9.2319.01	RED LENS	
Part Number	9.2143.01	AMBER LENS	
	9.2043.01	CLEAR LENS	



To suit P/N 2143 To suit P/N 2043

Part Number	STOP/REAR POSITION/REAR DIRECTION INDICATOR/ NUMBER PLATE LAMP SPARE PART		
	9.2396.01	RED/AMBER LENS	



Part Number	STOP/REAR POSITION/REAR DIRECTION INDICATOR SPARE PART		
	9.2368.01	RED LENS	



	0

	SIDE MARKER LAMP SPARE PARTS		
Part Number	9.2006.01	RED LENS	
	9.2006.02	AMBER LENS	



D. W. J.	MARKER LAMP SPARE PARTS	
Part Number	9.2042.01	RED/AMBER LENS



To suit P/N 2042

	MARKER LAMP SPARE PARTS		
Part Number	9.2304.01	RED LENS	
Part Number	9.2140.01	AMBER LENS	
	9.2141.01	CLEAR LENS	





To suit P/N 2140

To suit P/N 2141

ADR

Retro Reflectors

60mm diameter complete with mounting screw, 22cm². Reflectors with self adhesive are ECE certified.










P/N 2915-BL

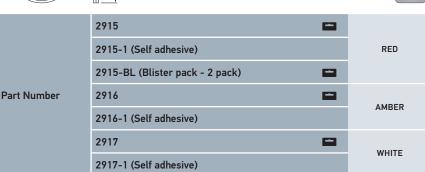


ECE R3/02

Retro Reflector - Red

83mm diameter red acrylic retro reflector with black rim, 48cm².





ADR 47/00

Compliance



ADR

Part Number	2902
Mounting	Single bolt mount.
Compliance	ADR 47/00

Retro Reflector - Red

83mm diameter acrylic retro reflector with plastic or metal surround, 48cm².



P/N 2910


99	129	118
P/N 2910	P/N 2910H	P/N 2910-2


17112710	1714271011	
	2910 (Red)	VERTICAL
Part Number	2910H (Red)	HORIZONTAL
	2910-2 (Red - Metal surround)	VERTICAL OR HORIZONTAL
Mounting	Two hole surface mount.	
Compliance	ADR 47/00	

Retro Reflector - Red

83mm diameter red acrylic retro reflector with plastic surround, 48cm².







pliance	0
DR	C
DR	C

Part Number	2930	
Part Number	2930-BULK	PACK OF 32
Mounting	Right angled base with two holes for optional surface mount.	
Compliance	ADR 47/00	

ADR 2919 AMBER 2920 Part Number 2920-BL (Blister pack - 2 pack) RED 2920-BULK (Pack of 20) 2921 WHITE

Retro Reflectors

 $70 \times 31.5 \text{mm}$ self adhesive, 18cm^2 .



P/N 2919



P/N 2920

P/N 2921


P/N 2920-BL



Compliance

ADR 47/00





COMPLIANCE	P/N 2923-2 - T	wo bolt holes
	2922	AMBER
	2922-2 (Two bolt holes)	AMBER
	2923	
Part Number	2923-BL (Blister pack - 2 pack)	
	2923-BULK (Pack of 20)	RED
	2923-2 (Two bolt holes)	RED
	2923-2BL (Two bolt holes, Blister pack - 2 Pack)	
	2923-2BULK (Two bolt holes - Pack of 20)	
	2924	WHITE
Compliance	ADR 47/00 ECE R3/02	


Retro Reflectors

94 x 44mm self adhesive (except two bolt hole versions), 33cm².





P/N 2923-BL



	2925	AMBER
	2926	
Part Number	2926-BULK (Pack of 100)	RED
	2926-BL (Blister pack - 2 Pack)	
	2927	WHITE
Compliance	ADR 47/00	

Retro Reflectors

 $105 \times 55 \text{mm}$ self adhesive, 50cm^2 .



P/N 2925



P/N 2926-BL

DuraLED® Accessories

Spare screw caps or screw bosses for the DuraLED® lamp range. Two screw caps and two screw bosses are required per lamp.





SCREW CAPS - DURALED®		
Part Number	Colour	Quantity
9.2330.10	RED	
9.2330.11	WHITE	
9.2330.12	BLUE	
9.2330.13	GREEN	PACK OF 4
9.2330.14	YELLOW	
9.2330.15	BLACK	
9.2330.16	AMBER	

A	A	A	A	
P/N 9.2330.10	P/N 9.2330.12	P/N 9.2330.13	P/N 9.2330.14	P/N 9.2330.16





SCREW CAPS - DURALED® COMBI-S/COMBI-R		
Part Number	Colour	Quantity
9.2377.08	GREY	SINGLE
9.2378.08	BLACK	SINGLE
9.2378.10-BULK	RED	
9.2378.11-BULK	WHITE	
9.2378.12-BULK	BLUE	
9.2378.13-BULK	GREEN	PACK OF 4
9.2378.14-BULK	YELLOW	
9.2378.15-BULK	BLACK	
9.2378.16-BULK	AMBER	



P/N 9.2378.10-BULK P/N 9.2378.12-BULK P/N 9.2378.13-BULK P/N 9.2378.14-BULK P/N 9.2378.16-BULK



SCREW BOSS	
9.2330.17	PACK OF 4



MOUNTING SPACERS - DURALED® COMBI	
98071900	BLACK
98071901	WHITE
Mounting spacer allows lamps to be surface mounted with the cable exiting any side of the spacer.	

Mounting spacer allows lamps to be surface mounted with the cable exiting any side of the spacer, or through the centre.

SHROUDS - DURALED® SURFACE MOUNT Part Number Colour Quantity 9.2053.08 (Nylon) BLACK SINGLE BLACK 9.2053.08-BULK (Nylon) 9.2053.10-BULK RED 9.2053.11-BULK WHITE 9.2053.12-BULK BLUE PACK OF 4 GREEN 9.2053.13-BULK 9.2053.14-BULK YELLOW 9.2053.15-BULK AMBER CHROME 9.2053.20-BULK PLATED



DuraLED® Marker Lamp Accessories

Spare mounting shrouds for the surface mount marker and surface mount courtesy lamp range. One mounting shroud is required per lamp.






_	
25°	
$\perp \perp / \perp$	// 77
	−43 −−

ANGLE MOUNT - DURALED SURFACE MOUNT		
9.2053.07	BLACK	SINGLE





RIMS - DURALED" FLUSH MOUNT MARKER AND SIGNAL/LED WIDE RIM COURTESY LAMPS			
Part Number	Colour	Material	
95968600	BLACK	DI ACTIC	
95968601	WHITE	PLASTIC	
95968500	POLISHED	316 STAINLESS	
95968506	SATIN CHROME PLATED	STEEL	
To suit wide marker and signal lamps with 29mm wide rim. Does not fit narrow rim lamps.			





P/N 95968601

DuraLED® Marker Lamp Accessories







P/N 9.2310.16-BULK



SCREW CAPS - DURALED FLUSH MOUNT		
Part Number	Colour	Quantity
9.2310.09-BULK	BLACK	
9.2310.10-BULK	RED	
9.2310.11-BULK	WHITE	
9.2310.12-BULK	BLUE	PACK OF 4
9.2310.13-BULK	GREEN	PACK OF 4
9.2310.14-BULK	YELLOW	
9.2310.15-BULK	AMBER	
9.2310.16-BULK	GREY	
Pack sizes of 50 available upon request.		

Pac	k sizes	of 50	availal	ole up	on rec	quest.











P/N 9.2310.10-BULK P/N 9.2310.12-BULK P/N 9.2310.13-BULK P/N 9.2310.14-BULK P/N 9.2310.15-BULK

DuraLED® DT Marker and Signal Lamp Accessories





P/N 9.2073.09

DURALED® DT MARKER LAMP HOUSING			
Part Number	Colour	Quantity	
9.2073.09	BLACK	SINGLE	
9.2073.11	WHITE	SINGLE	





P/N 9.2058.10

DURALED® HEAVY DUTY MARKER STAINLESS STEEL HOUSING		
9.2058.09		SINGLE
9.2058.10	POLISHED	SINGLE

DT Marker and Signal Lamp Connectors



DT PLUG, WEDGE AND CONTACTS	
4960-P	2 POLE
4963-P	6 POLE



P/N 4960-P

COVERS			
Part Number	Colour	Quantity	
9.2366.08	BLACK	CINICI E	
9.2366.11	WHITE	SINGLE	

SCREW BOSS		
9.2366.17	WHITE	PACK OF 4

MOUNTING SPACER			
8HG 959 952-002	BLACK	SINCI F	
8HG 959 952-012	WHITE	SINGLE	

EuroLED® Accessories

Spare covers or screw bosses for the EuroLED* range of lamps. One cover and two screw bosses are required per lamp.





P.



P/N 8HG 959 952-012





P/N 9.2366.11

P/N 8HG 959 952-002

LED Combination Lamp Mounting Pack

Mounting pack to suit LED combination lamp P/Ns 2391, 2392L and 2392R.



Part Number

9.2391.08

Part Number 9.2394.08 FRAME 9.2394.09 15MM SPACER

Mounting spacer allows lamps to be surface mounted with the cable exiting any side of the spacer, or through the centre.

LED Combination Trailer Lamp Accessories

To suit LED combination lamp P/Ns 2394 and 2395.




P/N 9.2394.09



P/N 9.2394.08

83mm Round Lamps - Mounting Rings

Mounting rings to suit 83mm round lamp range. Allows retro-fitting of lamp into existing applications with mounting holes larger than a diameter of 83mm.





Part Number	Diameter
98069600	90MM O.D
98069620	95MM O.D
98069640	100MM 0.D
98069660	110MM 0.D

Jumbo-S Accessories

Accessories for the Jumbo-S LED lamp range.



MOUNTING GASKET BASE, SPACERS AND 1½" SCREWS	
Part Number	Quantity
9.2361.08	SINGLE
Allows Jumbo-S Jamps to be surface mounted	



SCREW CAPS AND 1" SCREWS	
9.2361.09	SET OF 4

Designline/Jumbo-S/Jumbo Accessories

Housings and screw caps for the Designline/ Jumbo-S/Jumbo lamp range.



HOUSING - SINGLE, DOUBLE AND TRIPLE MODULE		
Part Number	MODULE	
9.2041.09-BULK	SINGLE	
9.2422.09	DOUBLE	
9.2423.09	TRIPLE	



SPARE PLASTIC CAPS		
Part Number	Colour	Quantity
9.5240.30	BLACK	PACK OF 50

To suit narrow and wide rim LED courtesy, marker and strip lamps.

LED Number Plate Lamp Accessories

Mounting kit for Number Plate lamp P/N 2559. Includes a housing, cover, screw bosses, screws and screw caps. One mounting kit is required per lamp.

MOUNTING KIT		
Part Number	Colour	Quantity
9.2559.09	BLACK	SINGLE
9.2559.19	WHITE	
Suits all narrow rim LED courtesy lamps.		



P/N 9.2559.19



P/	IΝ	7.200	7.U	7

MOUNTING SPACER AND EXTENDED SCREW BOSSES		
9.2559.08	BLACK	SINGLE
Suits LED Number Plate Lamp, Part No. 2559.		
Included in every LED Number Plate Bulk Pack, Part No. 2559-BULK.		



DURALED® ANGLE MOUNT NUMBER PLATE BRACKET	
8HG 958 029-001	SINGLE



SURFACE MOUNT STRIP LAMP SCREW CAPS			
Part Number	Colour	Quantity	
9.1009.09	CHARCOAL		
9.2652.09	WHITE	PACK OF 4	
9.1009.10	CHROME PLATED		

Surface Mount Strip Lamp -Screw Caps



P/N 9.1009.10

Marker and Courtesy Lamp Gaskets

Gaskets for narrow and wide rim LED courtesy lamps. Curved mount gasket (P/N 9GD 959 515-207) is designed to suit 64mm (2.5") pipes. Flexibility allows this particular gasket to suit a variety of curve radii.

NARROW RIM (LAMP WIDTH 22MM)			
Part Number	Material	Quantity	
9GD 959 515-127	RUBBER	PACK OF 4	
9GD 959 515-207 (Curved mount)	RUBBER	PACK OF 4	



P/N 9GD 959 515-127



P/N 9GD 959 515-207




P/N 9GD 959 517-007


WIDE RIM (LAMP WIDTH 29MM)		
9GD 959 517-007	CLOSE CELL FOAM	PACK OF 4

DuraLED® Flush Mount Gaskets









910 P/N 9GD 958 028-001

	9GD 980 867-007	ROUND SEAL
Part Number	9GD 980 867-507	RECTANGULAR SEAL
	9GD 958 028-001	CURVED SEAL

Strip Lamp Gaskets

P/N 9GD 958 028-001

Gaskets for narrow and wide rim strip lamps.





NARROW RIM (LAMP WIDTH 26MM)		
Part Number		Quantity
9.5243.05	RUBBER	SINGLE

WIDE RIM (LAMP WIDTH 33MM)		
9GD 959 155-507	CLOSE CELL FOAM	PACK OF 10

60mm Accessories

Accessories to suit 60mm lamps.

DESIGN RING FOR 60MM MODULES (OPTIONAL)		
Part Number	Colour	
9HB 161 122-007	SILVER	



 $\mbox{P/N 9HB 161 122-007}$ Pushes over front of 60mm lamp and locks into place.

MOUNTING PLATE	
Part Number	Colour
9XD 161 119-007	BLACK



P/N 9XD 161 119-007 For front mounting of 60mm lamps.

TWO DOLE	EDITIC (WITL	ITEDMINIAIC	AND SEALS)
INDECE	- FLOO (WITH		AND SEALS!

Part Number

8JD 156 150-807

Man and

P/N 8JD 156 150-807

THREE	POLE PL	UG (WITH	ITERMIN	IALS AND	SEALS)

Part Number

8JD 162 581-802

DESIGN RING FOR LED RING LAMP (OPTIONAL)		
Part Number	Colour	
9HB 163 085-012	CHROME	



P/N 9HB 163 085-012 Design ring pushes over front of 112mm lamp and locks into place.



LED Safety DayLights™

Safety DayLights™ are signal lamps that significantly enhance the visibility of your vehicle during daylight hours to prevent vehicle crashes by 'accidental oversight'.





Contents

LED Safety DayLights™

LED Safety DayLights™ Kit - Easy-Fit	94
LED Safety DayLights™ Kit - 15°	94
LED Safety DayLights™ Kit - 30°	95
LED Safety DayLights™ Kit - Recess Mount	96
LED Safety DayLights™ - Compact Mount	96
LED Safety DayLights™ Kit - Surface Mount	97
LED Safety DayLights [™] DuraLED [®]	97
LED Safety DayLights™ Kit - Rectangular	98
LED Safety DayLights™ 83mm	99
Safety DayLights™ Smart Controllers	100
Safety DayLights™ Dual Function Controllers	101

BE SAFE BE SEEN

HELLA LED SAFETY DAYLIGHTS™



- → Enhanced visibility to road users & pedestrians
- → Compact design with intense white light output
- → Easy fit installation

What are HELLA Safety DayLights™?

Safety DayLights™ are forward facing signal lamps that significantly enhance the visibility of your vehicle during daylight hours to prevent vehicle crashes by 'accidental oversight'.

Safety DayLights™ are a "never forget" safety enhancement. They automatically switch ON when the ignition is switched ON and automatically switch OFF when the headlamps are turned ON in order not to dazzle other road users at night.

Why Install HELLA Safety DayLights™?

As road users we have all experienced the 'fright second' of a near miss by being overlooked by another car, van or truck.


Equally frightening is almost not noticing another vehicle approaching due to an inconspicuous vehicle colour, the low sun casting harsh shadows or sun strike. Any single one of these 'fright seconds' has the potential to end in a tragic outcome and become a number in the road toll statistics.



Failure to see another road user contributes to over 50% of all daytime accidents.



For daytime intersection accidents this increases to as much as 80%.



Source: The Safety Effects of Daytime Running Lights, SWOV, 1997

Why can't I just switch on my headlamps?

Dipped beam headlamps are designed to effectively light up the road in front of the vehicle during darkness, whilst causing as little glare as possible to oncoming traffic.

During daytime, dipped beam headlamps 'waste' most of their light directed to the road in front of the vehicle but provide very little as a signal to other road users in bright daylight. Using your dipped beam headlamps during daylight hours has only a marginal added safety effect.



Designed to light the road at night without causing glare to other road users.



Designed to increase the visibility (conspicuity) of your vehicle during daylight hours.





Your Company Vehicle is Your Workplace

With the new Health & Safety at Work legislation in place, injuries from accidents involving taxis, company cars, courier vans, trucks or buses can now have serious consequences. The legislation places significant emphasis on risk assessment and active risk reduction.

One effective way to reduce the risk of a bus, truck, van or company car, being accidentally overlooked during daylight hours is the use of Safety DayLights $^{\mathbb{M}}$. Many later model vehicles are now fitted with Safety DayLights $^{\mathbb{M}}$ as standard safety equipment.

The cost to install or specify this 'Be Safe Be Seen' lighting addition is small considering the statistical risk of serious injury or worse due to your vehicle being accidentally overlooked.

- → Improve staff safety on the road
- → Low cost, ideal for fleet operators
- → Low power consumption
- → LED means no bulb replacement





MINIMISING ENVIRONMENTAL IMPACT

HELLA LED Safety DayLights[™] are a durable, environmentally-friendly investment into road safety.

Energy Efficiency


HELLA LED Safety DayLights™ use less than 5 watts per pair, equating to 95% less energy than the dipped headlamps of your vehicle.

- Why is a safer light using so much less energy?
- A LED Safety DayLights™ are designed to direct light at other road users and not onto the road in front of the vehicle as dipped beam headlamps do.
- Will this save me petrol compared to using my headlamps?
- \triangle Studies have shown that the average family car will save as much as 0.2 litres of petrol per 100km. For the entire New Zealand fleet this equates to a reduced environmental impact of over 100,000 tons per year of CO₂ emissions.
- What about my headlamp bulbs?
- A Using highly effective Safety DayLights™ instead of your dipped beam headlamps, will of course also extend the life of your valuable headlamp bulbs.





See for yourself the benefits such as fuel savings and ${\rm CO_2}$ emissions by using the online calculator. www.safetydaylights.com/nz/savings-calculator/

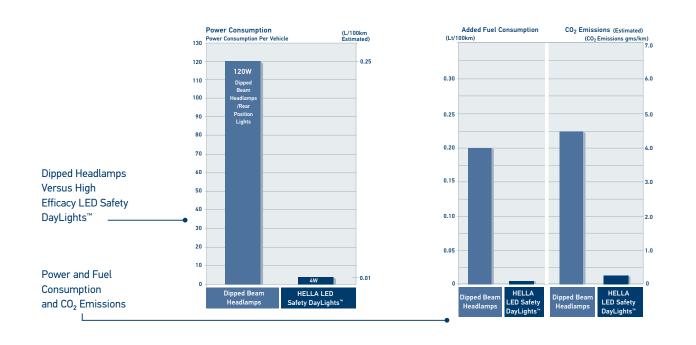

DESIGNED TO SIMPLIFY INSTALLATION


SAFETY DAYLIGHTS™ SMART CONTROLLER

HELLA's Safety DayLights™ Smart Controller is designed to simplify the installation of Safety DayLights™ by eliminating the need to connect the lamp, or changeover relay, to ignition terminal 15. The vehicle's ignition feed is typically used as a signal to turn Safety DayLights™ ON. Correctly identifying terminal 15 (Ignition) in the engine bay can be a difficult task on some vehicles, requiring specialised tools and in some cases the only solution is to route the wiring back through the fire wall into the vehicle cabin. This procedure can greatly increase the time and cost it takes to install Safety DayLights™. It can also be a daunting experience for the DIY-er not familiar with the electronic complexity of the modern vehicle.

The Safety DayLights™ Smart Controller reduces the installation complexity as it is directly connected to the positive terminal of the battery where it will sense that the vehicle engine has been activated.

The Safety DayLights™ Smart Controller uses advanced electronics that constantly monitor the voltage of the battery and other tell tale signs that the engine has been started. It will automatically switch the Safety DayLights™ ON. It will deactivate the Safety DayLights™ when the headlamps are turned ON or the engine is turned OFF (after a small delay).

See page 100 for product details.



^{*}Advanced version with vibration monitor for installation in vehicles with fuel saving alternator.









Designed to simplify installation saving time and install costs.



For more information about the Safety DayLights™ Smart Controller and the full product range of Safety DayLights™ please visit

www.safetydaylights.com



LED Safety DayLights™ Kit

- Easy-Fit

Forward facing signal lamps, designed to be mounted on vehicles with flat fronts, or on motorbikes. The lamps are an Easy-Fit installation, usually requiring no extra parts. Once the wiring is complete and the bracket is fitted, the LED lamp easily clips into place and installation is complete.





P/N 5636-BL



See page 101 for front position relay option.











	5636			12 VOLT	
Part Number	5636-BL (Blister Pack)			12 1021	
	5636-24V	24 VOLT			
Mounting	Suitable for horizo	ontal mounting.			
Power Consumption	2W				
Protection	IP 6K7 (Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)			
Cable Length	Pre-wired with 2.!	Pre-wired with 2.5m of sheathed multi-core cable.			
Spare Parts	1013 1013-24V	Single lamp 12V Single lamp 24V			
Lens Material	High impact acryl	ic.			
Compliance	ADR 76/00	£24 5875	ECE R87/00		
Kit Contents	5636/5636-24V 2 x LED Safety Da 2 x Mounting brac 6 x Mounting scre 1 x Changeover re 1 x Instruction she	kets ews elay	5636-BL 2 x LED Safety DayLights 2 x Mounting brackets 6 x Mounting screws 1 x Advanced smart cont 1 x Terminal kit 1 x Instruction sheet		

LED Safety DayLights™ Kit - 15°

A lens angle of 15 degrees allows installation as close as possible to the corners of a modern motor vehicle. These lamps were designed to fit the curved bumpers of modern vehicles to give the look of Original Equipment fitment. The lamps have extremely low power consumption at 2W per lamp and high impact acrylic lenses to protect against impact damage.





P/N 5630-BL



27 (\$ 5 6 8	779.8.73 S.F.E. DOT DRIL			((目))	ECE	COMPLIANCE	
	5630			-	12	VOLT	
Part Number	5630-BL (Blister	Pack)			12	VOLI	
rait Nullibei	5630-24V	5630-24V \$\rightarrow\$ 24 VOLT					
	5630-24VBL (Blis	ster Pack)			24	VULI	
Mounting	Suitable for horizon	tal mounting.					
Power Consumption	2W						
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)						
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.						
Lens Material	High impact acrylic.						
Compliance	ADR 76/00	E24 5863	ECE R87/00				
Kit Contents	5630/5630-24V 2 x LED Safety DayL 2 x Mounting bracke 6 x Mounting screws 1 x Changeover rela 1 x Instruction sheet	ets s y	5630-BL/563 2 x LED Safet 2 x Mounting 6 x Mounting 1 x Advanced 1 x Terminal 1 x Instruction	y DayLight brackets screws smart con kit		ay	







LED SAFETY DAYLIGHTS™



See page 101 for front position relay option.



	5631		•	12 VOLT		
Part Number	5631-BL (Blister Pack)			12 VOLI		
	5631-24V			24 VOLT		
Mounting	Suitable for horizo	ontal mounting.				
Power Consumption	2W					
Protection	IP 6K7 (Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)				
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.					
Lens Material	High impact acryli	High impact acrylic.				
Compliance	ADR 76/00	£24 5862	ECE R87/00			
Kit Contents	5631/5631-24V 2 x LED Safety Da 2 x Mounting brac 6 x Mounting scre 1 x Changeover re 1 x Instruction she	kets ws elay	5631-BL 2 x LED Safety DayLights 2 x Mounting brackets 6 x Mounting screws 1 x Advanced smart cont 1 x Terminal kit 1 x Instruction sheet			

LED Safety DayLights™ Kit - 30°

A lens angle of 30 degrees allows installation as close as possible to the corners of a modern motor vehicle. These lamps were designed to fit the curved bumpers of modern vehicles to give the look of Original Equipment fitment. The lamps have extremely low power consumption at 2W per lamp and high impact acrylic lenses to protect against impact damage.





P/N 5631-BL



LED Safety DayLights™ Kit - Recess Mount

Recess mount strip lamp, flush mounted for a professional finish. Features low power consumption, reverse polarity protection, and a durable Grilamid® lens to protect against impact damage.















Part Number	5618			12 VOLT		
Part Number	5618-24V			24 VOLT		
Mounting	Recess mount. Suitable for horiz	Recess mount. Suitable for horizontal mounting.				
Power Consumption	2W					
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)					
Cable Length	Pre-wired with 2.	Pre-wired with 2.5m of multi-core cable.				
Spare Parts	1005 Single lamp 12V 1005-24V Single lamp 24V					
Lens Material	High impact and	chemical resistant Gri	ilamid® lens			
Compliance	ADR 76/00	£24 0001	ECE R87/00			
Kit Contents	2 x LED Safety Da 4 x Screw caps at 1 x Changeover r 1 x Instruction sh	nd mounting screws elay				

LED Safety DayLights™


- Compact Mount

Strip lamp which clips into a separate mounting bracket for ease of installation. This lamp is ECE certified and is supplied with a mounting bracket and screws. The lens is made of durable Grilamid* to protect against impact damage, and the lamps feature reverse polarity protection.





Mounting bracket

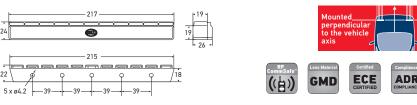


Part Number	1008	12 VOLT	
Part Number	1008-24V	24 VOLT	
Mounting	Suitable for horizontal mounting.		
Power Consumption	2W		
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)		
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.		
Lens Material	High impact and chemical resistant Grilamid® lens		
Compliance	ADR 76/00 (24) 0001 ECE R87/00		











	E440 (II)	
	5619 (Horizontal Mount - Kit)	
Part Number	5619V (Vertical Mount - Kit)	12 VOLT
	1009-BL (Horizontal Mount - Blister Pack)	
rait Nullibei	5619-24V (Horizontal Mount - Kit)	
	5619V-24V (Vertical Mount - Kit)	24 VOLT
	1009-24VBL (Horizontal Mount - Blister Pack)	
Mounting	Suitable for horizontal (H) or vertical (V) surface mount.	
Power Consumption	3W	
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cle	aning)
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable. Blister pack is pre-wired with 0.5m of sheathed multi-core cable.	
Spare Parts	1009 Single lamp 12V (Horizontal mount) 1009-24V Single lamp 24V (Horizontal mount) 1009V Single lamp 12V (Vertical mount) 1009V-24V Single lamp 24V (Vertical mount) 9.2652.09 White screw caps (Pack of 4) 9.1009.09 Charcoal screw caps (Pack of 4) 9.1009.10 Chrome plated screw caps (Pack of 4)	
Lens Material	High impact and chemical resistant Grilamid® lens	
Compliance	ADR 76/00 (24) 5869 ECE R87/00	
Kit Contents	2 x LED Safety DayLights™ 4 x Mounting screws 4 x Screw caps	

LED Safety DayLights™ Kit - Surface Mount

Surface mount LED Safety DayLights[™]designed to fit flat-fronted vehicles. Comes either as a single lamp, or as a kit. The lamp is ADR compliant and features a Grilamid® lens to protect against impact damage.





Ultra slim height of only 11mm. Lamp shown active.



P/N 1009-BL (Single)






See page 101 for front position relay option.





1 x Changeover relay 1 x Instruction sheet



	148	
Part Number	1003	
Mounting	Surface mount with mounting bushes supplied. Suitable for horizontal mounting.	
Voltage	Multivolt™ for optimum brightness at input voltage from 9 to 33 volts.	
Power Consumption	3W	
Protection	Reverse polarity and transient spike circuit protection. IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)	
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.	
Lens Material	High impact and chemical resistant Grilamid® lens	
Compliance	ADR 76/00 &	
See page 80 for DuraLED® accessories.		

DuraLED® Safety DayLights™

LED DuraLED® Safety DayLights™ for trucks, commercial vehicles and buses.




LED Safety DayLights™ Kit

- Rectangular

Rectangular shaped ultra light lamps offering maximum visibility in road traffic during the day. Features lightweight housing, universal mounting bracket and ultra-durable Grilamid® nylon lens for extreme impact, UV and chemical resistance. Easy wiring requiring only 3 connections, earth (-), ignition (+) and position lamps (+). (No extra relay required).















Part Number	5617				
Part Number	5617-0E			•	
Mounting	Suitable for horiz	Suitable for horizontal mounting.			
Voltage	Multivolt [™] for opt	imum brightness a	t input voltages from 9 to 33 volts.		
Power Consumption	<2W				
Protection	Reverse polarity and transient spike circuit protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)				
Spare Part	1004	Single lamp (w	ith 0.5m of multi-core cable)		
Cable Length	5617 Pre-wired with 0.5m of multi-core cable. 5617-0E Pre-wired with 2.5m of multi-core cable.				
Lens Material	High impact and chemical resistant Grilamid® lens				
Compliance	ADR 76/00	E24 0002	ECE R87/00	&	



P/N 5617



Wiring harness and super seal connectors.

P/N 5617 Kit Contents:

- 2 x LED Safety DayLights™
- 1 x Professional wiring harness and super seal connectors
- 4 x Mounting brackets and fasteners
- 1 x Instruction sheet



P/N 5617-0E

P/N 5617-0E Kit Contents:

- $2 \times \text{LED}$ Safety DayLights $^{\text{TM}}$ with 2.5m sheathed multi-core cable.
- $4\,\mathrm{x}$ Mounting brackets and fasteners
- 1 x Instruction sheet














Part Number	1006	12 VOLT		
rai (Nullibei	1007-24V (Includes Front Position Lamp)	24 VOLT		
Mounting	Surface mount. Single bolt 1/4" stainless UNC thread. Nut and washer supplied.			
Power Consumption	Safety DayLights [™] : 4W Front position: 1W (P/N 1007-24V only)			
Protection	Reverse polarity and transient spike circuit protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)			
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.			
Lens Material	High impact and chemical resistant Grilamid® lens			
Compliance	P/Ns 1006/1007-24V: ADR 76/00 E24 5854 ECE R80 P/N 1007-24V also: ADR 49/00 ECE R7/02	7/00		

83mm Round LED Safety DayLights™

The lamp features a traditional round lens that illuminates with a distinctive ring of white LEDs when used as a Safety DayLight $^{\rm M}$. P/N 1007-24V also features a front position function.





LED Safety DayLights™

Front position (P/N 1007-24V only)



See page 84 for mounting accessories.










83	 41
74	
	A T
W W	<u>‡</u> ⊟
	bolt 1/4"
	unc
	22 21

Part Number	2108-GMD				12 V	DLT
Part Number	2108-GMD24V			24 V	DLT	
Mounting	Surface mount. Sin	Surface mount. Single bolt 1/4" stainless UNC thread. Nut and washer supplie			ied.	
Power Consumption	Safety DayLights™: Front position: Front indicator:	P/N 210 3W 1W 4W	2	P/N 2108-GM 4W 1W 4W	D24V	
Protection	Reverse polarity and transient spike circuit protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)					
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.					
Lens Material	High impact and chemical resistant Grilamid® lens					
Compliance	ADR 6/00: Cat 1	ADR 49/00 ECE R6/01	ADR 76/00 ECE R7/02	ECE R	37/00	&
See page 84 for mounting accessories.						

83mm Round LED Safety DayLights™/Front Position/ Front Direction Indicator Lamp

This LED combination lamp features an integrated Safety DayLight™, front position and front direction indicator function. The lamp features a traditional round lens that illuminates with a distinctive ring of white LEDs when used as a Safety DayLight™. This lamp eliminates the need for installation of multiple lamps. Front position lamp and front direction indicator will extinguish the Safety DayLight™ automatically.





Safety DayLights™ Smart Controller - Advanced*


This smart controller is designed to simplify the installation of HELLA's LED Safety DayLights™ range by eliminating the need to wire the lamp, or changeover relay to ignition terminal 15.

The Safety DayLights™ Smart Controller can be wired directly to the positive terminal of the battery, which saves the difficult and often time consuming task of finding the ignition feed.

The smart controller monitors the voltage supply from the battery and will automatically switch the Safety DayLights $^{\mathbb{M}}$ on when the engine is started, and automatically switch them off when the headlamps are activated, or the engine is turned off.

*Advanced version with vibration monitor for installation in vehicles with fuel saving alternators.










Part Number	3090
	3090-BULK
Voltage	Multivolt™, suitable for 12 and 24 volt systems.
Maximum Continuous Load	20W
To Suit	HELLA LED Safety DayLights™ range.

Features a Safety DayLights™ OFF delay of approximately 10 seconds.

WIRING SPECIFICATIONS		
Terminal Number	Connect to	
30	Battery (+)	
31	Earth return (-)	
86	Front position or headlamps (+)	
DL1 & DL2	Safety DayLights [™] (+)	

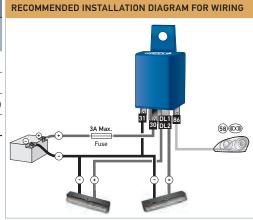


Safety DayLights™ Smart Controller - Standard

This smart controller is designed to simplify the installation of HELLA's LED Safety DayLights $^{\text{\tiny M}}$ range by eliminating the need to wire the lamp, or changeover relay to ignition terminal 15.

The Safety DayLights™ Smart Controller can be wired directly to the positive terminal of the battery, which saves the difficult and often time consuming task of finding the ignition feed.

The smart controller monitors the voltage supply from the battery and will automatically switch the Safety DayLights $^{\rm m}$ on when the engine is started, and automatically switch them off when the headlamps are activated, or the engine is turned off.











Part Number	3091
	3091-BULK
Voltage	Multivolt™, suitable for 12 and 24 volt systems.
Maximum Continuous Load	20W
To Suit	HELLA LED Safety DayLights™ range.

Features a Safety DayLights™ OFF delay of approximately 10 seconds.

	WIRING SF	PECIFICATIONS		
Terminal Number		Connect to		
	30	Battery (+)		
	31	Earth return (-)		
	86	Front position or headlamps (+)		
	DL1 & DL2	Safety DayLights™ (+)		

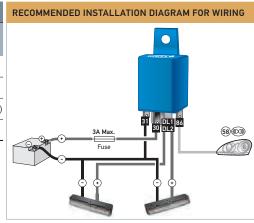



9.5630.03		12 VOLT
9.5636.03		12 VOLI
9.5630.04		24 VOLT
9.5636.04		24 VULI
12 Volt P/N 9.5630.03 P/N 9.5636.03 24 Volt P/N 9.5630.04	P/Ns 1009, 5619, 5630, 5631 P/N 5636 P/Ns 1009-24V, 5619-24V, 5630-24V, 563	1-24V
	9.5636.03 9.5630.04 9.5636.04 12 Volt P/N 9.5630.03 P/N 9.5636.03 24 Volt	9.5636.03 9.5630.04 9.5636.04 12 Volt P/N 9.5630.03 P/Ns 1009, 5619, 5630, 5631 P/N 9.5636.03 P/N 5636 24 Volt P/N 9.5630.04 P/Ns 1009-24V, 5619-24V, 5630-24V, 563

RECOMMENDED INSTALLATION DIAGRAM FOR WIRING
1A 55 33 57A 56 58 203 Fuse Fuse 5 5 5 30 57A 56 58 203 57A 56 58 200 57A 57A 56 57A 57A 56 57A

WIRING SPECIFICATIONS			
Terminal Number	Connect to		
30	Ignition (+)		
85	Earth return (-)		
86	Front position or headlamps (+)		
87A	Safety DayLights [™] (+)		

Dual Function Safety DayLights™ Controller


This controller is designed to turn your HELLA Safety DayLights™ into front position lamps at night. The dual function controller is connected and activated by the headlamp of the vehicle.

The dual function controller reduces the current to the Safety DayLights™ thus turning them into road legal* front position lamps.

Only one controller is required for a pair of HELLA Safety DayLights™.

*Please note legally required spacing of front position lamps and only one pair of front position lamps is legally permitted.



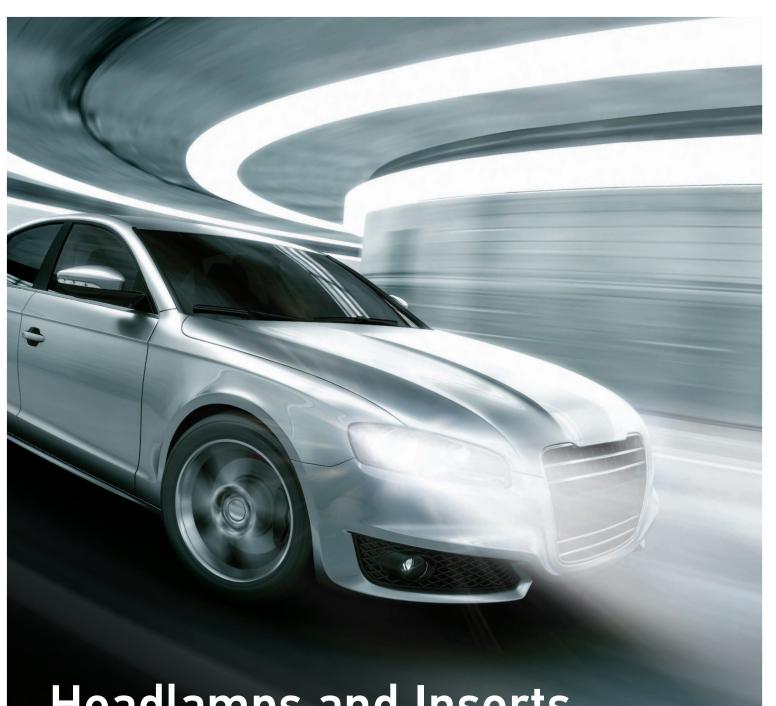

Headlamps and Inserts

HELLA has manufactured headlamp systems for more than 100 years. The durability and reliability of HELLA products has made HELLA a world leader in headlamp technology.





Contents


Headlamps and Inserts

90mm Bi-LED Headlamps	104
90mm Bi-Halogen Headlamps	10
90mm LED Headlamps	10
90mm LED Fog Lamps	10
90mm Universal Headlamps	108-10
7" Round LED Headlamps	110-11
7" Round Headlamps	112-11
5 ¾" Round Headlamps	114-11
Rectangular Headlamps & Housings	116-11
DAF/Scania HeadLamps	118
BMW/139mmØ HeadLamps	119
Universal Headlamps	120
Headlamp Accessories	12

Bi-LED 90mm 2nd Generation High/ Low Beam Headlamp

LED high/low beam headlamp featuring a generous spread of light and strong high beam for the open road. Low power consumption and ultra long life equates to economical running costs compared to a bulb lamp. Exceptional white light output and extremely homogeneous illumination for reduced driver eye strain which means greater safety. Complete with 4 screw adjusters and DT plug.










Part Number	1032-G2			
Mounting	3 point mount, screv	3 point mount, screw adjusters included.		
Voltage	Multivolt™ for optim	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	High beam: Low beam:	30W 20W		
Protection	· ·	against dust and high-pressure water splash) against dust and high-pressure/steam jet cleaning)		
Connection	4 pole DT socket			
Spare Parts	4962-P 9.1029.12	4 pole DT plug kit (included) Mounting frame		
Compliance	E1) 4209 Ref. 12.5	ECE R112/01	<u></u>	




P/N 9.1029.12

P/N 1032-G2 High Beam distance. (m)












Part Number	1LL 009 998-011		12 VOLT
Part Number	1LL 009 998-051		24 VOLT
Bulbs to Suit	12V 24V	CA1255 CA2470	
Spare Parts	9.1029.11 9.1534.05	Mounting frame Bulb connector	
Compliance	E1) 2484		



High Beam distance. (m)



Bi-Halogen 90mm H7 High/Low Beam Headlamp

Compact H7 Low/High Beam headlamp.
Pattern-free hardened glass lens and
Free-Form (FF) cast aluminium reflector.
Excellent light output and extremely
homogeneous illumination with virtually no
scatter. Straight-forward installation with
3 pre-mounted adjustment screws on the
vehicle body. Matching connectors included.



Headlamp Adjusters

Adjuster to suit 90mm headlamps.

Part Number	15297700		PACK OF 3
Part Number	25416300		PACK OF 3
To Suit	P/N 15297700 P/N 25416300	Suits 14mm Ø mounting holes Suits 17mm Ø mounting holes	



P/N 25416300

	1	1	9
8	8	8	

P/N 15297700

LED 90mm Low Beam

LED low beam featuring a generous spread of light. Low power consumption and ultra long life equates to economical running costs compared to a bulb lamp. Exceptional white light output and extremely homogeneous illumination for reduced driver strain which means greater safety. Complete with 3 screw adjusters.











Part Number	1ML 012 488-011			
Mounting	3 point mount, screv	3 point mount, screw adjusters included.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.			
Power Consumption	20W			
Protection	IP 5K4K (Protection against dust and high-pressure water splash) IP 5K9K (Protection against dust and high-pressure/steam jet cleaning)			
Connector	4 Pole FEP socket (Plug not included)			
Spare Parts	25416300 9.1029.11 4988-P 4988-DT	Adjusters (3, included) Mounting frame (not included) 4 pole FEP plug kit 4 pole FEP to DT adaptor		
Compliance	E1 4090	ECE R112/01	<u></u>	

LED 90mm High Beam

LED high beam featuring a generous spread of light. Low power consumption and ultra long life equates to economical running costs compared to a bulb lamp. Exceptional white light output and extremely homogeneous illumination for reduced driver strain which means greater safety. Complete with 3 screw adjusters.











Part Number	1F0 011 988-121			
Mounting	3 point mount, screv	3 point mount, screw adjusters included.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.			
Power Consumption	20W			
Protection	IP 5K4K (Protection against dust and high-pressure water splash) IP 5K9K (Protection against dust and high-pressure/steam jet cleaning)			
Connector	4 Pole FEP socket (Plug not included)			
Spare Parts	25416300 9.1029.11 4988-P 4988-DT	Adjusters (3, included) Mounting frame (not included) 4 pole FEP plug kit 4 pole FEP to DT adaptor		
Compliance	(E1) 3831 Ref. 12.5	ECE R112/01	<u> </u>	

LED 90mm High Beam distance. (m)









Part Number	1N0 011 988-001				
Part Number	1N0 011 988-011 (Daytime Running Lamp/Front Position)				
Voltage	Multivolt™ for optimum brigh	Multivolt™ for optimum brightness in 12 and 24 volt systems.			
Power Consumption	Fog: 25W Daytime Running Lamp: 15W (1N0 011 988-011 version only) Front Position: 3W (1N0 011 988-011 version only)				
Protection	IP 5K4K (Protection against dust and high-pressure water splash) IP 5K9K (Protection against dust and high-pressure/steam jet cleaning)				
Connector	4 Pole FEP socket (Plug not included)				
Spare Parts	4988-P 4988-DT	4 pole FEP plug kit 4 pole FEP to DT adaptor			
Compliance	Fog: Daytime Running Lamp: Front Position:	E1 3831 ECE R87/00 ECE R7/02	ECE R19/03	&	

LED 90mm Fog Lamp

LED Fog lamp featuring a generous spread of light. Low power consumption and ultra long life equates to economical running costs compared to a bulb lamp. Exceptional white light output and extremely homogeneous illumination for reduced driver strain which means greater safety.



P/N 1N0 011 988-011 LAMP FUNCTIONS				
Daytime running lamp	Front position			

90mm Headlamp Plugs, Adaptors and Mounting Frames

Spare parts to suit 90mm headlamps

	9.1029.09 (Mounting frame)			
5	9.1029.10 (Mounting frame)			
	9.1029.11 (Mounting frame)			
Part Number	9.1029.12 (Mounting frame)			
	4988-P (4 pole FEP plug kit)			
	4988-DT (4 pole FEP to DT adaptor)			
To Suit	P/N 4988-P P/Ns 1ML 012 488-011/1F0 011 988-12 /1N0 011 988-001/011 P/N 4988-DT P/Ns 1ML 012 488-011/1F0 011 988-12 /1N0 011 988-001/011 P/N 9.1029.09 P/Ns 1029-24V and 1030-24V P/N 9.1029.11 P/Ns 1ML 012 488-011/1F0 011 988-121 P/N 9.1029.12 P/Ns 1032-G2			







www.hella.co.nz

H7 Headlamp - 24 Volt

Compact H7 headlamps with glass lens for buses, coaches and mobile homes. Includes headlamp adjusters.











Part Number	1029-24V			LOW BEAM
Part Number	1030-24V			HIGH BEAM
Bulbs to Suit	Low/High Beam: Position:	12V CA1255 HL124	24V CA2470 HL244	
Spare Parts	15297700 9GH 152 654-007 8JD 156 150-807 9.1029.09	Headlamp adjuster (Pack of 3) Rear cap Two pole plug with terminals and seals for position lamp Mounting frame		for position lamp
Compliance	E) 917			



P/N 1030-24V











P/N 15297700 P/N 9GH 152 654-007 P/N 8JD 156 150-807 P/N 9.1029.09


P/N 1030-24V High Beam distance. (m)











P/N 1030H1-24V

H1 Headlamp - 24 Volt

H1 headlamps with die cast aluminium reflector and hardened glass lens.



Part Number	1029H1-24V			LOW BEAM
Part Number	1030H1-24V			HIGH BEAM
Bulbs to Suit	Low/High Beam: Position:	12V C1255 HL124	24V C2470 HL244	
Spare Parts	25416300 9GH 152 654-007 8JD 156 150-807 9.1029.10	Headlamp adjuster (Pack of 3) Rear cap Two pole plug with terminals and seals for position lamp Mounting frame		for position lamp
Compliance	E1) 2397			











P/N 9.1029.10


P/N 8JD 156 150-807

P/N 9GH 152 654-007

P/N 25416300

P/N 1030H1-24V

P/N 1030H1-24V High Beam distance. (m)



7" Round LED Headlamps

- High/Low Beam and Daytime Running Lamp/Front Position


The high/low beam function of the 7" LED headlamp range offers 1150/750 lumen light output and a wide spread creating a superior light distribution increasing peripheral vision. With the added feature of Daytime Running Lamps and Front Position Lamps the 1058LED is a one-stop-shop for all headlight needs, increasing visibility and therefore safety on the road.


Combining the latest state of the art LED technology, multivoltage 12/24V DC circuit design and precision optics, the retrofit lamps provide outstanding visibility, safety, and durability – making them one of the most advanced 7" LED headlamps available. The tough die-cast aluminium housing is IP 67 sealed against water and dust ingress with a UV resistant, hard coated polycarbonate lens making the HELLA's 7" Round LED Headlamp range perfect for use on and off-road.





P/N 1058LED









Part Number	1056LED				
Mounting	Retrofit 178 Ø (7°) headlamps				
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.				
Power Consumption	High Beam: 35W Low Beam: 25W				
Light Output	High Beam: 1150 lumen Low Beam: 750 lumen				
Protection	Reverse polarity protection. IP 67 (Protection against dust and high pressure water jets)				
Connection	3 PIN "H4" type male plug (100mm cable)				
Housing Material	Die-cast Aluminum				
Lens Material	Coated polycarbonate				
Compliance	ECE R112/01 Ref. 12.5 (£1) 7581				
Part Number	1058LED (Daytime Running Lamp/Front Position)				
Power Consumption	High Beam: 35W Low Beam: 25W Daytime Running Lamp: 15W (1058LED version only) Front Position: 2W (1058LED version only)				
Cable Length	P/N 1058LED has 2 additional 100mm pre-wired cables with male blade terminals for front position and daytime running lamp functions.				
Compliance	ECE R112/01 Ref. 12.5 (£1) 6081 ECE R87/00 ECE R7/02				
Other specifications as p	Other specifications as per P/N 1056LED				


P/N 1058LED LAMP FUNCTIONS







Daytime Running Lamp Front position


1056LED/1058LED High Beam distance. (m)




1056LED/1058LED Low Beam distance. (m)










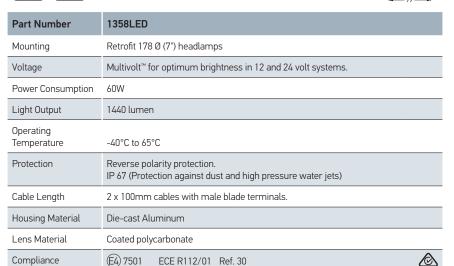

1358LED High Beam distance. (m)



7" Round LED Headlamp - High Beam

The 1358LED lamp features a high beam function with a massive 1440 lumen light output for only 60W. Combining the latest state of the art LED technology, multivoltage 12/24V DC circuit design and precision optics, the retrofit lamps provide outstanding visibility, safety, and durability – making them one of the most advanced 7" LED headlamps available. The tough die-cast aluminium housing is IP67 sealed against water and dust ingress with a UV resistant, hard coated polycarbonate lens making the HELLA's 7" Round LED Headlamp range perfect for use on and off-road.





Part Number	1016	HEADLAMP HOUSING
Part Number	1017	CHROME RIM

7" (178mm) Headlamp Housing

Headlamp housing and chrome rim for halogen or sealed beams and inserts 7" (178mm) in diameter. Fully sealed steel cowl, complete with adjusting mechanism for vertical and horizontal alignment, sealing gasket, stainless steel retaining rim and 3 pin wiring harness with separate park lamp connection. Ideal for truck, bus or body builders. Suits Mercedes, Kenworth, Mack, White etc. Outer chrome rim (P/N 1017) to suit headlamp housing P/N 1016.



7" (178mm) H4 Halogen High/Low Beam Insert

Semi-sealed headlamp with sealing cap.







		Certified
		ECE CERTIFIED

Part Number	1056		
Bulbs to Suit	Headlamp:	12V XD1260/55	24V XD2475/70
Compliance	E4 53		
Where front position lamp is required, use P/N 1058.			




Rear view

7" (178mm) H4 Halogen High/Low Beam Insert

Semi-sealed headlamp with front position lamp bulb holder (includes P/N HL124 bulb) and sealing boot.







Rear view

7" (178mm) H4 Halogen High/Low Beam Insert - Hardened Glass

High performance Halogen headlamp insert fitted with extremely robust hardened glass lens providing maximum resistance when subjected to high operating temperatures and thermal shock. Ideal for 24 volt and high wattage bulb applications. Supplied complete with sealing boot and front position lamp bulb holder assembly.



112



Rear view



Part Number

Bulbs to Suit

Compliance

1058HD

Headlamp:

(E4) 53

Front position:

12V

HL124

XD1260/55

24V

HL244

XD2475/70







7" (178mm) H3 Halogen Driving Lamp Insert

Suitable for use as high beam headlamp in most 178mm round headlamp carriers (eg. P/N 1016).



Part Number	9.1358.01			
Bulbs to Suit	12V 24V	YC1255 YC2470		
Compliance	E1) 14529			





Part Number	1016	HEADLAMP HOUSING
Part Number	1017	CHROME RIM

7" (178mm) Headlamp Housing

Headlamp housing and chrome rim for halogen or sealed beams and inserts 7" (178mm) in diameter. Fully sealed steel cowl, complete with adjusting mechanism for vertical and horizontal alignment, sealing gasket, stainless steel retaining rim and 3 pin wiring harness with separate park lamp connection. Ideal for truck, bus or body builders. Suits Mercedes, Kenworth, Mack, White etc. Outer chrome rim (P/N 1017) to suit headlamp housing P/N 1016.



5 ¾" (146mm) H4 Halogen High/Low Beam Insert

Semi-sealed headlamp with front position lamp bulb holder (includes P/N HL124 bulb) and sealing boot. Suitable for dual headlamp systems.









Part Number	1055		
Bulbs to Suit	Headlamp: Front position:	12V XD1260/55 HL124	24V XD2475/70 HL244
Spare Parts	13839700 9GH 126 647-011	Front position I Sealing boot	oulb holder
Compliance	E1 17031		





Sealing boot Rear view

5 3/4" (146mm) H4 Halogen High/ Low Beam Insert - Hardened Glass

High performance Halogen headlamp insert fitted with extremely robust hardened glass lens, providing maximum resistance when subjected to high operating temperatures and thermal shock. Ideal for 24 volt and high wattage bulb applications. Supplied complete with sealing boot and front position lamp bulb holder assembly.



Part Number	1055HD		
Bulbs to Suit	Headlamp: Front position:	12V XD1260/55 HL124	24V XD2475/70 HL244
Compliance	E1) 17031		






5 3/4" (146mm) H1 Halogen Low Beam Insert

Low beam insert with front position lamp bulb holder and sealing boot. Suitable for dual headlamp systems.





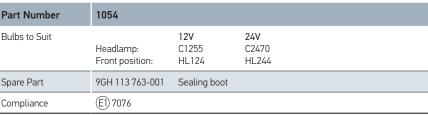



Rear view

techfeedback@hella.co.nz







5 ¾" (146mm) H1 Halogen High Beam Insert

Semi-sealed headlamp, for high beam section of dual headlamp systems with sealing boot.



Part Number	1053		
Bulbs to Suit	Headlamp:	12V C1255	24V C2470
Spare Part	9GH 113 763-001	Sealing boot	
Compliance	E1 14464		
Earth terminal is a 'Post' (bullet) type connection.			



5 ¾" (146mm) H1 Halogen Long Range Driving Insert

Semi-sealed headlamp, for high beam section of dual headlamp systems and sealing boot.

Part Number	1040		
Bulbs to Suit	Headlamp:	12V C1255	24V C2470
Spare Part	9GH 113 763-001	Sealing boot	





165 x 100mm H4 Halogen High/Low Beam Insert

Semi-sealed headlamp and front position lamp with sealing boot.









ECE

ECE

Part Number	1044		
Bulbs to Suit	Headlamp: Front position:	12V XD1260/55 HL124	24V XD2475/70 HL244
Spare Part	9FF 126 444-001	Front position	pulb holder
Compliance	E1 7197		



165 x 100mm H4 Halogen High/Low Beam Insert

Semi-sealed headlamp with sealing boot and wiring adaptor.



Part Number	1042			
Bulbs to Suit	Headlamp:	12V XD1260/55	24V XD2475/70	
Spare Part	9GH 126 647-011	Sealing boot		
Compliance	E1) 7197			



165 x 100mm H1 Halogen High Beam Insert

Semi-sealed headlamp with sealing cap.



Part Number	1041		
Bulbs to Suit	Headlamp:	12V C1255	24V C2470
Compliance	E1) 24504		



Rear view

200 x 142mm H4 Halogen High/Low Beam Insert



Part Number	1043		
Bulbs to Suit	Headlamp: Front position:	12V XD1260/55 HL124	24V XD2475/70 HL244
Spare Parts	13839700 9GH 126 647-011	Front position b Sealing boot	ulb holder
Compliance	E1) 17009	E1) 17119	



Semi-sealed headlamp with front position lamp bulb holder (includes P/N HL124 bulb).




200

Part Number 1024

Rectangular Headlamp Housing

Suits 200 x 142mm rectangular headlamp units (P/N 1043). Ideal for truck, bus or body builders.





Part Number	1025	
Spare Part	9.1025.07	Chrome plated outer rim

Twin Rectangular Headlamp Housing

For most 165 x 100mm rectangular headlamp units. Chrome plated outer rim. Complete with adjusting mechanisms for vertical/horizontal alignment and wiring loom. Ideal for truck, bus or body builders.



DAF Headlamp. CF65/75/85 LF45/55, XF95/105 01/01-05-13







	HEADLAMP (H1/H7)			
Part Number	1LJ 247 046-071		LH	
	1LJ 247 046-081		RH	
Bulbs to Suit	Low Beam: High Beam:	CA2470 C2470		
Compliance	E1) 1134			

Scania Headlamp, P94 - T164 (series 4) 95-04, P230 - T470 04-on





	HEADLAMP (H4)					
Part Number	1LG 007 150-111	LH				
	1LG 007 150-121		RH			
Bulbs to Suit	Headlamp: Indicator: Position:	XD2475/70 R2421 G2410				
Spare Parts	9ES 144 433-031 9ES 144 434-031 9EL 145 103-011 9EL 145 104-011	Lens, left Lens, right Lens for indicator - left Lens for indicator - right				
Compliance	E) 111	E4) 276				

5-Series (E39) 09/00 - 06/04






	HEADLAMP (H7/H7) WITH ELECTRIC LEVELLER				
Part Number	1LL 008 053-591		LH		
	1LL 008 053-60	1	RH		
Bulbs to Suit	Headlamp: Indicator: Position:	CA1255 x 2 RY1221 YL1210			
Spare Part	9DX 153 746-011	Position lamp bulb holder			
Compliance	E1) 1182				



Certified ECE CERTIFIED



Part Number	1L3 996 002-22	1			
Part Number	1L3 996 002-411 (with Front Position)				
Bulbs to Suit	Headlamp: Front Position:	12V XD1260/55 HL124	24V XD2475/70 HL244		
Compliance	€ 12 20005				

139mmØ H4 headlamp with Frame



P/N 1L3 996 002-221



P/N 1L3 996 002-411

LED Combination Headlamp - High/Low Beam and Indicator/ Position

Combination headlamp with all functions in LED technology. For horizontal mounting, with die-cast aluminum housing, lens made of scratch-resistant polycarbonate, with 6-pin DEUTSCH connector, light functions: low and high beam, position light and indicator.












-		
Dout Neverbox	1LE 996 374-031	LEFT HAND
Part Number	1LE 996 374-041	RIGHT HAND
Mounting	Single bolt mount, upright.	
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.	
Power Consumption	High beam 40W Low beam 25W Indicator 8W Position 1W	
Protection	IP 6K4K (Protection against dust and water splash) IP X9K (Protection against high-pressure jets)	
Connection	6 pole DT socket	
Spare Parts	4963-P 6 pole DT plug, wedge and 6 contacts	
Compliance	(E) 4079 ECE R112/01 Ref. 12.5 ECE R6/01 ECE R7/02	<u> </u>

H4 Halogen High/Low Beam Headlamp Assembly

Lamp unit, lens dimensions 352 x 195mm, complete with mounting frame and adjusting mechanisms for vertical and horizontal alignment. Fully enclosed housing with removable rear sealing cap for bulb replacement access. Ideal for truck, bus or body builders.











Part Number	1027					
Mounting	Simple four point r	Simple four point mounting.				
Bulbs to Suit	Headlamp: Front position:	12V XD1260/55 HL124	24V XD2475/70 HL244			
Spare Parts	9.1027.01 9.1027.02 9.1027.04	Clear lens Reflector Sealing cap				
Compliance	E1) 17016					

External Headlamp





8JD 008 151-051









	HEADLAMP (H7/H3)					
Part Number	1LA 993 975-07	LH				
	1LA 993 975-08	RH				
Bulbs to Suit	Dipped Beam: Main Beam: Indicator: Position:	CA2470 YC2470 R2421 HL244				
Protection	IP X9K (Protection	IP X9K (Protection against high pressure steam/jet cleaning)				
Spare Parts	1LA 990 185-011 9EL 990 186-001 9EL 990 186-101	Light unit Lens for indicator lamp, front Lens for indicator lamp, rear				
Accessories	8JD 008 151-051	Socket for AMP plug connector				
Compliance	E4) 9496					

Bulb Connectors

Plug with pre-installed leads and crimp connectors (H1 and H7). Adapts to original wiring by crimp connector and heat shrink insulator, H4 version with 200mm leads (no connectors).

	4972-H1	Н1
	4972-H4	Н4
	4972-Н7	Н7





P/N 4972-H7

P/N 4972-H1

HID Gas Discharge (G3) Power Pack

Part Number	5DV 007 760-631 12 VOLT					
	5DV 007 810-171	24 VOLT				
To Suit	Bulb P/Ns D2S and D2R.					



HID Gas Discharge (G4) Power Pack


Part Number	5DV 008 855-001	12 VOLT
	5DV 008 856-001	24 VOLT
To Suit	Bulb P/Ns D1S and D1R.	



HID Gas Discharge Ignitor

Part Number	5DD 008 319-501	12/24 VOLT
To Suit	Bulb P/Ns D2S and D2R	



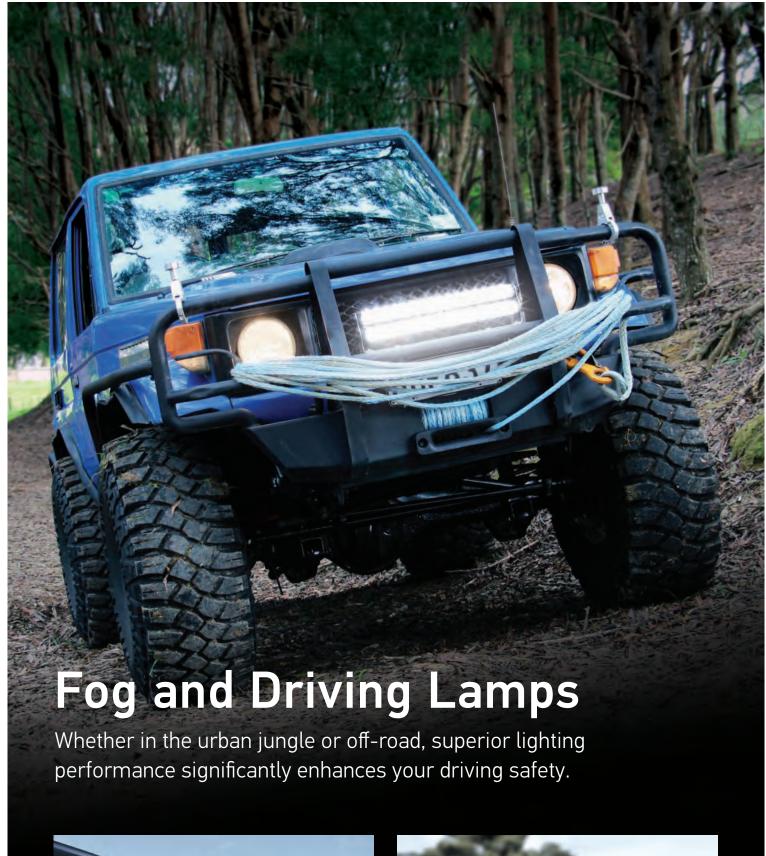





Contents

Fog and Driving Lamps

LED Light Bar 470	128-129
LED Light Bar 350	130-131
LED Light Bar Accessories	132-133
LED Rallye 4000	134
LED Rallye 4000 Compact	135
Rallye 4000	136-137
Rallye 4000 Compact	138
Rallye 3003 Compact	139
Comet FF 450	140
Comet FF 500	141
Comet FF 550	142
Comet 450	143
Comet 500	144
Comet 550	145
Comet 100	146
Comet 200	147
Comet 300	148
Micro DE Fog Lamp	149
FF 50	150
FF 75	151

HELLA LED LIGHT BARS OUTSTANDING LIGHT PERFORMANCE



HELLA's range of award winning LED light bars guarantee powerful illumination and unmatched reliability. The sleek low profile housings are expertly designed and precision manufactured using ultra-durable materials to ensure long life and value for money for professional and recreational drivers.

As a manufacturer of world leading state of the art light technology, HELLA's relentless dedication to continuously improve the latest designs is shown in the unique range of LED Light Bars. HELLA's range of light bars stand out due to their light weight, revolutionary non-corrosive housing and flexible mounting system for numerous applications.

For a peace of mind Fit & Forget solution, all HELLA LED Light Bars are covered by an extensive 5 year warranty.



SEMA Global Media Awards Winner 2016





What sets HELLA LED Light Bars apart from the rest?

01 High Performance LEDs

Durable high performance automotive grade LEDs and precision optics give the light bar superior illumination on and off-road.

All LEDs are required to pass the rigorous AEC-Q101 qualification defined by the Automotive Electronics Council as a "Stress Test for Qualification for Integrated Circuits or Discrete Semiconductors."

Testing to AEC-Q101 requires the LED to pass a harsh regime of stress tests including extreme high and low temperature cycles, humidity, vibration and mechanical shock. These tests are designed to ensure the LED is capable of handling the unique and harsh requirements of automotive applications.

High quality, precision optics produce a strongly defined and "tight" beam pattern. This enables accurate aiming of the beam, maximising distance and reducing scattered light which can cause off angle glare and unwanted reflections while driving.

The colour temperature is kept below 6000K as cooler colour temperatures have been associated with eye strain and fatigue.

High efficacy LEDs reduce power consumption and minimise heat generated by the lamp making them efficient and safe to touch.








02 Low Profile Mounting System

The HELLA LED Light Bar has a much lower profile than traditional light bars, this allows more flexibility in where the lamp can be mounted. The aerodynamic design results in less disturbance to the air flow so that the vehicle's cooling and performance are not adversely affected if the lamp is mounted in front of a radiator grille.

The heavy duty bracket will suit most vehicle installations. Easy to mount and adjust, therefore ideal for numerous applications. Made of 316 stainless steel, it is ultra durable and non corrosive.

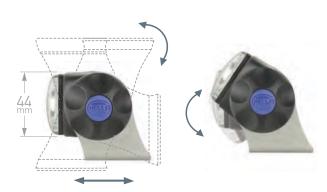



03 Dust and Waterproof

Built to stand all weather and off-road conditions the light bar is hermetically sealed, making it dust and waterproof.

IP 6K7 (Protection against dust and temporary water immersion)
IP 6K9K (Protection against dust and high-pressure/steam
jet cleaning)

04 Intelligent Design Features



Expertly designed and precision manufactured for the toughest of outdoor conditions.

The LED Light Bar housing has been purposely designed with a wavy contour to optimise vertical rapid heat dissipation, making the lamp more thermally efficient.

The wavy contour is easy to clean as there are no cavities which can be clogged with dirt, unlike traditional light bars with a horizontal fin design.






Road legal HELLA LED Light Bars, the preferred choice in driving lights.

05 Outstanding Material Choice

New revolutionary ceramic plastic materials open up a world of possibilities that was never thought to be achievable only a few years ago. The replacement of metal based housing heat-sinks with thermally conductive plastic means complete corrosion resistance. This is especially important in demanding environmental conditions where lights are constantly exposed to the elements and sometimes temporarily submerged.

The innovative ceramic based plastic transfers the heat generated by the LEDs and electronics to the outside of the lamp body, thereby lowering the thermal stress on the internal components. This ensures a long service life with minimal degradation of the light output.



Thermal image showing heat evenly transferred across the lamp. For more information refer to page 5.

06 Light Weight




Lamps with thermally conductive plastic are up to 60% lighter than comparable metal bodied lamps. The much lower mass significantly reduces the stress on mounting points in high vibration and shock applications.

When mounting on ATVs and off-road vehicles, weight is an important factor. Compared to many heavier lights in the market, HELLA's Light Bars have little impact on the original vehicles all-important weight distribution.

MEASURING DISTANCE IN LIGHT

Isolux charts represent the beam pattern and the distance illuminated on a flat road surface by two lamps.

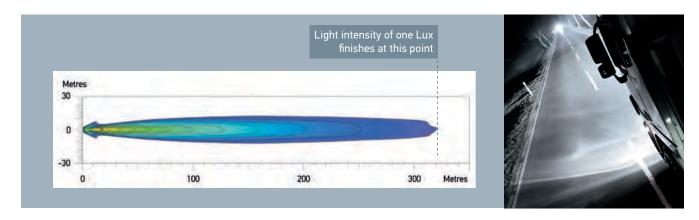

The colour shades represent the distance in metres from the lamps. The dark blue shade indicates an illumination level of one Lux (320 metres in the shown diagram). One Lux represents the intensity of the light of a full moon (under clear atmospheric conditions) or just sufficient light by which to read a newspaper.


Pencil Beam

The pencil beam driving light is designed for maximum long-range illumination, providing improved visibility of objects and traffic situations at great distance. This beam type is recommended for off-road vehicles where objects at a far distance must be recognised early to give the driver time to decide on a course of action.

Example of Pencil Beam for long distance illumination

Spread Beam

The spread beam driving light provides effective illumination of both the area immediately in front of the vehicle and some distance ahead. This beam type is particularly suitable for road vehicles (e.g. cars, trucks and buses) where fatigue-free driving is more important than recognising objects at a far distance.



Example of Spread Beam for even illumination in close range

HELLA Fog Lamps

Fog, rain or snow can reflect the light of standard driving lights into the driver's vision creating a dangerous glare which makes it difficult to recognise hidden hazards.


HELLA Fog Lamps are equipped with specially designed reflectors, which evenly illuminate the width of the road, providing you with a wide path of light for clearer visibility in close range to the vehicle. Particularly suitable for any vehicle driving through humid or moist areas where fog, rain or snow is common.

LED Light Bar 470 - HD Bracket

The longer and brighter LED Light Bar 470 features high performance automotive LEDs and a maximum luminous intensity of 166,000 candela at a power consumption of only 35 watts.

The dust and waterproof Light Bar comes in two different beam patterns – High Beam (Ref 25) and Pencil Beam (Ref 37.5). With only 950g weight the Light Bar is particularly popular for roof mount applications on ATVs and Off-road vehicles. The non corrosive, thermally conductive housing is highly resistant to degradation and due to its slim profile, this streamline Light Bar is ideal for applications where aerodynamic styling are a valued attribute. The flexible, adjustable mounting system ensures easy installation.

The Light Bar 470 features a Multivolt™ circuit for optimum brightness at a wide range of input voltages from 9 to 33 volts and is fully road legal with ECE approval.



1 x LED Light Bar 470









					PROOF		
Part Number	1397HD (High beam)						REF. 25
Part Number	1398HD	(Pen	cil bean	n)		-	REF. 37.5
Mounting	Upright or	pend	lant.				
Voltage	Multivolt™	for op	otimum l	brightness at i	nput voltages from	m 9 to 33	volts.
Power Consumption	35W						
Maximum Luminous Intensity	1397HD: 1398HD:						
Protection	IP 6K7 (Pr	Reverse polarity and transient spike protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)					
Cable Length	Pre-wired	Pre-wired with 2.5m of tinned multi-core cable.					
Compliance		E24)	1947	R10/05			
	1397HD:	E24)	0012	R112/01	Ref. 25		
	1398HD:	E24)	0013	R112/01	Ref. 37.5		



Contents



2 x HD mounting brackets

Mounting brackets can be positioned to suit most vehicle installations.


HD single mounting bracket - Disassembled view

1 x Instruction booklet

LED Light Bar 470 Beam Pattern distance (m) 2 x 1397HD = 1 lux 2 x 1398HD == 1 lux 40 30 20 10 0 -10 -20 -30 100 150 200 250 300 350 400 450 500 550 600

















Part Number	1599HD (Close Range and Long Range) COMBI
Mounting	Upright or pendant.
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.
Power Consumption	Combined: 36W Close/Long Range: 18W
Maximum Luminous Intensity	77,000 candela
Max. Light Output	2200 lumen
Protection	Reverse polarity and transient spike protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)
Cable Length	Pre-wired with 2.5m of tinned multi-core cable.
Lens Material	High impact and chemical resistant Grilamid® lens
Accessories	8032 Number plate bracket light bar 470 8HG 958 128-811 HD double mount stainless steel feet (one pair) 8HG 958 139-071 HD single spare end bracket kit 8XS 958 337-021 LED Light Bar - Clear protective cover 8XS 958 337-031 LED Light Bar - Amber protective cover 8XS 958 337-111 LED Light Bar - Protective cover
Compliance	<u>&</u>
Contents	1 x LED Light Bar 470 2 x HD mounting brackets 1 x Instruction booklet

LED Light Bar 470 - Combi Work Lamp HD Bracket

The LED Light Bar 470 Combi is a unique work lamp offering three light options: close range, long range or combined - all in a single light bar. The work lamp is a great addition to any Ute, ATV or off-road vehicle.

Only 1kg of weight means less stress on mounting locations, the low profile design will not restrict cooling airflow when fitted to the front of a vehicle - which can be a problem with larger lights. Don't be fooled by its size though, this light bar certainly punches above its weight with its long distance and spread light output. $Multivolt^{\text{TM}} \ circuitry \ means \ the \ lamp \ can \ be \ used$ with both 12V or 24V DC systems, whilst only consuming 36W. Any input between 9 to 33 volts will give optimum brightness. 🖾

The adjustable mounting system ensures for easy installation and flexibility for any orientation. Providing unmatched corrosion resistance due to an innovative thermally conductive polymer housing, and the toughness of a UV, chemical and impact resistant Grilamid® lens. The Combi Work Lamp is the natural choice when exceptional durability and long term reliability in demanding environments is needed.






- Disassembled view






Mounting brackets can be positioned to suit most vehicle installations





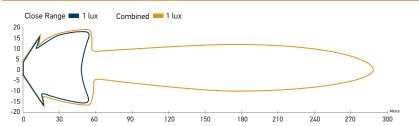









NOTE: A work lamp must be switched independently

of headlamps when mounted on a vehicle.



P/N 8032 Number plate bracket light bar 470 - Mounted upright or pendant (Depending on your vechicle)


LED Light Bar 350

- Plastic Bracket

This innovative, light weight HELLA LED Light Bar 350 is the first such lamp with a body manufactured entirely from non corrosive, thermally conductive high performance plastics. This aerodynamic powerhouse features 12 durable high performance automotive grade LEDs and a maximum luminous intensity of 145,000 candela with a mere power consumption of only 25 watts.

The dust and waterproof Light Bar comes in two different beam patterns – High Beam (Ref 20) and Pencil Beam (Ref 30).

The hermetically sealed and submersible Light Bar features a Multivolt™ circuit for optimum brightness at input voltages from 9 to 33 volts, is fully road legal with ECE approval and comes with a comprehensive 5 year warranty.











		81		PROOF			
Part Number	1395 (High Beam)	•	REF. 20				
	1396 (Pencil Beam	1)		•	REF. 30		
Mounting	Upright or pendant.						
Voltage	Multivolt™ for optimu	m brightness a	at input voltage:	s from 9 to 33	volts.		
Power Consumption	25W						
Maximum Luminous Intensity		1395: 96,000 candela 1396: 145,000 candela					
Protection	IP 6K7 (Protection ag	Reverse polarity and transient spike protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)					
Cable Length	Pre-wired with 2.5m	Pre-wired with 2.5m of tinned multi-core cable.					
Compliance	E4 2909	R10/04	<u>&</u>				
	1395: 🖾 0008	R112/01	Ref. 20				
	1396: 🖾 0009	R112/01	Ref. 30				
Contents	1 x LED Light Bar 350	2 x Plasti	c mounting bra	ckets 1 x	Instruction booklet		










Mounting brackets allow rotation of driving light.

Mounting brackets can be positioned to suit most vehicle installations.

Plastic single mounting bracket - Disassembled view


LED Light Bar 350 Beam Pattern distance (m)

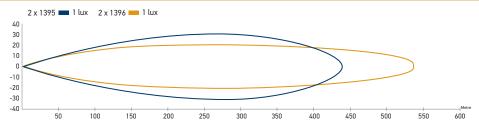











Part Number	1395HD (High Beam)	>	REF. 20		
Part Number	1396HD (Pencil Bean	n)			REF. 30
Mounting	Upright or pendant.				
Voltage	Multivolt™ for optimum b	orightness at in	put voltages from 9 t	o 33 vo	lts.
Power Consumption	25W				
Maximum Luminous Intensity	1395HD: 96,000 candela 1396HD: 145,000 candela				
Protection	Reverse polarity and transient spike protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)				
Cable Length	Pre-wired with 2.5m of t	inned multi-co	ore cable.		
Compliance	<u>E</u> 4 2909	R10/04	<u> </u>		
	1395HD: 🕮 0008	R112/01	Ref. 20		
	1396HD: 🔯 0009	R112/01	Ref. 30		
Contents	1 x LED Light Bar 350	2 x HD mour	nting brackets	1 x ln	struction booklet

LED Light Bar 350 - HD Bracket

This innovative, light weight HELLA LED Light Bar 350 is the first such lamp with a body manufactured entirely from non corrosive, thermally conductive high performance plastics. This aerodynamic powerhouse features 12 durable high performance automotive grade LEDs and a maximum luminous intensity of 145,000 candela with a mere power consumption of only 25 watts.

The dust and waterproof Light Bar comes in two different beam patterns – High Beam (Ref 20) and Pencil Beam (Ref 30).

The hermetically sealed and submersible Light Bar features a Multivolt $^{\scriptscriptstyle{\text{TM}}}$ circuit for optimum brightness at input voltages from 9 to 33 volts, is fully road legal with ECE approval and comes with a comprehensive 5 year warranty.


The heavy duty HD brackets are made of stainless steel, ultra durable and corrosion resistant. The perfect choice for on or off road applications.



HD single mounting bracket

- Disassembled view






Mounting brackets can be positioned to suit most vehicle installations.



LED Light Bar 350 Beam Pattern distance (m)

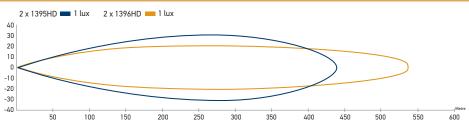



LED Light Bar Protective Covers

Whether you want to protect your light bar or make your vehicle look unique, we have the light covers you need for the job.

The amber and black covers give your vehicle a distinctive appearance that's sure to get attention, the amber cover is great during foggy conditions as it reduces glare and reflection.



P/N 8XS 958 336-111 LED Light Bar 350 Protective Cover



LED LIGHT BAR 350 COVERS			
	8XS 958 336-021	CLEAR	
Part Number	8XS 958 336-031	AMBER	
	8XS 958 336-111	BLACK	

To suit the LED Light Bar 350 range.



LED LIGHT BAR 470 COVERS			
	8XS 958 337-021	CLEAR	
Part Number	8XS 958 337-031	AMBER	
	8XS 958 337-111	BLACK	

To suit the LED Light Bar 470 range.


LED Light Bar Number Plate Brackets


The sleek and clean number plate bracket has been designed for easy and quick installation.

Depending on your vehicle the light bar can be mounted upright or pendant.










NUMBER PLATE BRACKET LIGHT BAR 350

Part Number	803

To suit the LED Light Bar 350 Work Lamp Range.


Suits standard New Zealand, Australian and European number plates.

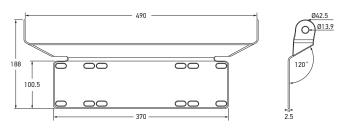

NUMBER PLATE BRACKET LIGHT BAR 470

Part Number 8032

To suit the LED Light Bar 470 Work Lamp Range. Suits standard New Zealand, Australian and European number plates.






nu single bracket kit + Le	D LIGHT Dai	4/(

Part Number	8HG 958 139-841	
Kit Contents: (Lamp not included)	2 x Stainless Steel Mounting Feet 2 x Stainless Steel M8 x 20mm Cap Screws 2 x Stainless Steel M8 Nylon Lock Nuts 2 x End Adaptors	2 x Friction Washers 2 x End Clamps 2 x Screw Caps



HD Single Bracket Kit + LED Light Bar 350




Mounting brackets can be positioned to suit most vehicle installations.

LED Light Bar - HD Single Bracket Kit

These easy to install heavy bracket kits made to suit the LED Light Bar range and can be mounted upright or pendant to accommodate most vehicle installations. The smooth brackets simply clip onto the ends of the Light Bar. The nuts, bolts and mounting brackets are made from marine grade 316 stainless steel and come with anti-theft screw caps.




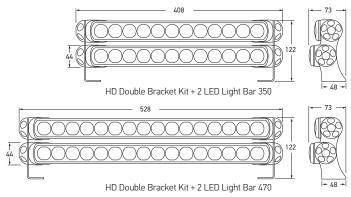


Part Number	8HG 958 139-851	
Kit Contents: (Lamps not included)	2 x Stainless Steel Double Mounting Feet 4 x Stainless Steel M8 x 20mm Cap Screws 4 x Stainless Steel M8 Nylon Lock Nuts 4 x End Adaptors	4 x Friction Washers 4 x End Clamps 4 x Screw Caps

LED Light Bar - HD Double Bracket Kit



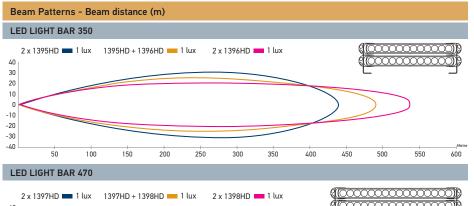

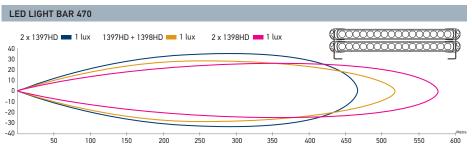



HD Double Bracket Kit + 2 x LED Light Bar 350



Mounting brackets allow rotation of Light Bar.


LED Luminator Spread Beam Driving Lamp


Equipped with innovative triple high-boost reflectors and state-of-the-art LED technology for all lighting functions, Luminator LED driving lamps deliver long lasting and extremely powerful light output, achieving an intense and consistent long-range illumination that is very similar to daylight, without harsh contrasts. Complete with clear cover P/N 8141.





Front view showing position lamp









Part Number	1389	•	SPREAD BEAM
Mounting	Upright or pendant		
Voltage	Multivolt™ for optim	num brightness at input voltages from 9 to	o 33 volts.
Power Consumption	Driving lamp: Position lamp:	30W 1W	
Protection		against dust and high-pressure splashing orgainst high-pressure cleaner, specific for romersion	,
Spare Part	9.1389.01	Driving lamp lens, reflector and LED light	source.
Compliance	E1) 3161	Ref: 50	

LED Luminator Spread Beam distance (m) 40 40 40 100 200 300 400 500 600


Rallye 4000 Accessories



P/N	21	/.	1

	8127		PROTECTIVE COVER
Part Number	8141		CLEAR PROTECTIVE COVER
	8126		PROTECTIVE GRILLE
Spare Parts	9.1389.01	LED lamp lens and reflector	






LED Luminator Compact Spread Beam Driving Lamp

Compact Luminator LED lamp with high performance LEDs for long range illumination.





Part Number	1394	•	SPREAD BEAM
Mounting	Upright or pendan	t.	
Voltage	Multivolt [™] for optir	mum brightness in 12 and 24 volt systems	
Power Consumption	Driving lamp:	11W	
Spare Part	9.1394.01	Driving lamp lens, reflector and LED light sou	urce.
Compliance	E1) 3738	Ref: 45	

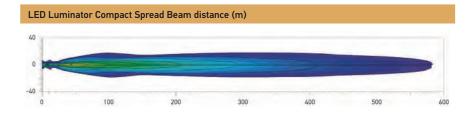

Rallye 4000 Accessories

Part Number	8120		PROTECTIVE COVER
Part Number	8163		CLEAR PROTECTIVE COVER
Spare Parts	9.1389.01	LED lamp lens and reflector	




P/N 8163

Rallye 4000 Spread Beam Driving Lamp

The Rallye 4000 spread beam features a sturdy zinc die-cast metal body and bracket for excellent strength and vibration resistance. The bracket has a large contact surface making the lamp stable in rough conditions. Suitable for professional, commercial and off-road drivers. Complete with protective cover P/N 8125.




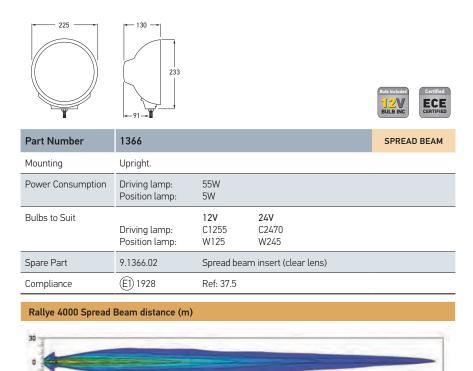

Rallye 4000 Pencil Beam Driving Lamp

The Rallye 4000 pencil beam features a sturdy zinc die-cast metal body and bracket for excellent strength and vibration resistance. The lamp bracket has a large contact surface making the lamp stable in rough conditions. Suitable for professional, commercial and off-road drivers. Complete with protective cover P/N 8125.



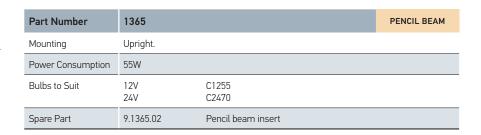



30 0 1 Lux 700m

Rallye 4000 Pencil Beam distance (100W Bulb) (m)



	8125		PROTECTIVE COVER
Part Number	8141		CLEAR PROTECTIVE COVER
	8126		PROTECTIVE GRILLE
Spare Parts	9.1165.01 9.1365.02 9.1366.01 9.1366.02 9.1366C.01 9.1366C.01BL 9.1365.05 9.1365.06 9.1365.07 9.1366C.07	Fog lamp insert Pencil beam insert Spread beam insert (optic lens) Spread beam insert (clear lens) Spread beam insert with Celis pos Spread beam insert (blue lens) Wiring loom Knurled screw set (2) Black retaining rim Chrome retaining rim	ition lamp





Rallye 4000 Chrome Spread Beam Driving Lamp

The Rallye 4000 spread beam driving lamp features clear glass optics and chrome plated zinc die-cast metal housing. Complete with protective cover P/N 8125 and Allen keys.







Part Number	1366CHROME			SPREAD BEAM
Mounting	Upright.			
Power Consumption	Driving lamp: Position lamp:	55W 5W		
Bulbs to Suit	Driving lamp: Position lamp:	12V C1255CB W125	24V C2470 W245	
Spare Parts	9.1366.02 9.1366C.07	Spread bear Chrome reta		
Compliance	E1) 1928	Ref: 37.5		





Part Number	1366C			SPREAD BEAM
Mounting	Upright.			
Power Consumption	Driving lamp: Position lamp:	55W 5W		
Bulbs to Suit	Driving lamp: Position lamp:	12V C1255CB W125	24V C2470 W245	
Spare Parts	9.1366C.01 9.1366C.07	Spread bear Chrome reta	n insert with Celis position lam aining rim	р
Compliance	E1) 1753	Ref: 17.5		
Celis operates on either	12V or 24V			

Rallye 4000 Chrome Spread Beam Driving Lamp with Celis Position Light

The Rallye 4000 spread beam driving lamp with clear glass optics and integrated Celis LED circular guide position light. Chrome plated zinc die-cast metal housing.



Celis ring








Part Number	1366C-BLUE			SPREAD BEAM
Mounting	Upright.			
Power Consumption	Driving lamp: Position lamp:	55W 5W		
Bulbs to Suit	Driving lamp: Position lamp:	12V C1255 W125	24V C2470 W245	
Spare Parts	9.1366C.01BL 9.1366C.07	Spread bear Chrome reta	m insert with blue lens aining rim	
Compliance	E1) 2254	Ref: 17.5		

Rallye 4000 Spread Beam distance (m)



Rallye 4000 Chrome Spread Beam Driving Lamp

The Rallye 4000 spread beam driving lamp features blue clear glass optics and chrome plated zinc die-cast metal housing. Suitable for colourless bulbs only.




Rallye 4000 Compact Spread Beam **Driving Lamp**

170mm compact version of the Rallye 4000 driving lamp, with clear Free-Form (FF) reflector lens design and sturdy zinc die-cast weatherproof metal housing.





P/N 1378CHROME










Part Number	1378	SPREAD BEAM	
Part Number	1378CHROME		SPREAD BEAM
Mounting	Upright.		
Power Consumption	55W		
Bulbs to Suit	12V 24V	C1255 C2470	
Spare Part	9.1378.01	Spread beam insert	
Compliance	E1) 1901	Ref: 37.5	

Rallye 4000 Compact Spread Beam distance (m)

Rallye 4000 Compact Pencil Beam **Driving Lamp**

Pencil beam driving lamp with clear glass optics. Sturdy die-cast weatherproof metal housing.





C2470 24V Spare Part 9.1380.01 Pencil beam Insert

Rallye 4000 Compact Pencil Beam distance (100W Bulb) (m)



Rallye 4000 Compact Accessories




Part Number	8155		CLEAR PROTECTIVE COVER
	8115		PROTECTIVE COVER
Spare Parts	9.1365.06 9.1378.01 9.1380.01 9.1178.01	Knurled screw set (2) Spread beam insert Pencil beam Insert Fog lamp insert	

www.hella.co.nz








Rallye 3003 Compact Spread Beam Driving Lamp

Rallye 3003 compact spread beam driving lamp, with Clear Free-Form (FF) reflector lens design and high boost reflector.




Part Number	1369		SPREAD BEAM
Mounting	Upright.		
Power Consumption	55W		
Bulbs to Suit	12V 24V	C1255 C2470	
Spare Part	9.1378.01	Spread beam insert	
Compliance	E1) 1901	Ref: 37.5	

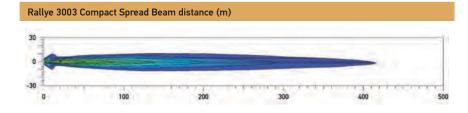

Comet FF 450 Spread Beam Driving Lamp

H3 spread beam with black plastic housing. Complete with protective cover P/N 8XS 186 530-012.









Part Number	1324		SPREAD BEAM	
Mounting	Upright or pendant.			
Power Consumption	55W			
Bulbs to Suit	12V 24V	YC1255 YC2470		
Spare Part	9.1324.01	Driving lamp insert		
Compliance	E1) 3221	Ref: 12.5		

Comet FF 450 Spotlight distance (m) 40 0 100 200 300 400 500 600

Comet FF 450 Fog Lamp

H3 fog lamp with black plastic housing. Complete with protective cover P/N 8XS 186 530-012.



Part Number	1124		FOG BEAM
Mounting	Upright or pend	ant.	
Power Consumption	55W		
Bulbs to Suit	12V 24V	YC1255 YC2470	
Spare Part	9.1124.01	Fog lamp insert	
Compliance	E1) 3221		


Protective Covers



Part Number	8XS 186 530-012	PROTECTIVE COVER
Part Number	8156	CLEAR PROTECTIVE COVER

P/N 8156





Comet FF 500 Spread Beam Driving Lamp

H3 spread beam with black plastic housing. Complete with protective cover P/N 8XS 186 531-012.



Certified	Bulb Include
ECE	12V BULB INC

Part Number	1325		SPREAD BEAM
Mounting	Upright.		
Power Consumption	55W		
Bulbs to Suit	12V 24V	YC1255 YC2470	
Spare Part	9.1325.01	Driving lamp insert	
Compliance	E1) 3222	Ref: 17.5	

Comet FF 500 Spotlight distance (m) 40 -40 100 200 300 400 500 600

Certified **ECE**



Part Number	1125		FOG BEAM
Mounting	Upright.		
Power Consumption	55W		
Bulbs to Suit	12V 24V	YC1255 YC2470	
Spare Part	9.1125.01	Fog lamp insert	
Compliance	E1) 3222		

Comet FF 500 Fog Lamp

H3 fog lamp with black plastic housing. Complete with protective cover P/N 8XS 186 531-012.



Protective Covers

Part Number	8XS 186 531-012	PROTECTIVE COVER
	8157	CLEAR PROTECTIVE COVER




P/N 8157

Comet FF 550 Spread Beam Driving Lamp

H3 spread beam with black plastic housing. Complete with protective cover P/N 8XS 186 532-012.









Part Number	1326		SPREAD BEAM
Mounting	Upright or pend	ant.	
Power Consumption	55W		
Bulbs to Suit	12V 24V	YC1255 YC2470	
Spare Part	9.1326.01	Driving lamp insert	
Compliance	(E1) 3223	Ref: 12.5	

Comet FF 550 Spotlight distance (m) 40 -40 100 200 300 400 500 600

Comet FF 550 Fog Lamp

H3 fog lamp with black plastic housing. Complete with protective cover P/N 8XS 186 532-012.



Part Number	1126		FOG BEAM
Mounting	Upright or pendan	t.	
Power Consumption	55W		
Bulbs to Suit	12V 24V	YC1255 YC2470	
Spare Part	9.1126.01	Fog lamp insert	
Compliance	E1) 3223		

Protective Covers




Part Number	8XS 186 532-012	PROTECTIVE COVER
	8158	CLEAR PROTECTIVE COVER

P/N 8158







Comet	450	Spread	Beam	Driving
Lamp				

Spread beam driving lamp with hardened glass lens and tough plastic body. Supplied with protective cover, Part No. 8123.



Part Number	1310	SPREAD BEAM	
Mounting Upright or pendant.		i.	
Power Consumption	55W		
Bulbs to Suit	12V 24V	YC1255 YC2470	
Spare Part	9.1310.01	Driving lamp insert	
Compliance	E1) 44442	Ref: 17.5	

Comet 450 Spread Beam distance (m) 30 0 -30 0 100 200 300 400 500

Certified ECE CERTIFIED



Part Number	1110	FOG BEAM	
Mounting	Upright or pendant.		
Power Consumption	55W		
Bulbs to Suit	12V 24V	YC1255 YC2470	
Spare Part	9.1110.01	Fog lamp insert	
Compliance	E1) 18227		

Comet 450 Fog Lamp

Fog lamp with hardened glass lens and tough plastic body. Supplied with protective cover, Part No. 8123.



Comet 450 Accessories

8136 CLEAR PROTECTIVE COVER	Part Number	art Number	8123	PROTECTIVE COVER
		art Number	8136	CLEAR PROTECTIVE COVER




P/N 8136

Comet 500 Spread Beam Driving Lamp

Spread beam driving lamp with hardened glass lens and tough plastic body. Supplied with protective cover, Part No. 8121.










Part Number	1308		SPREAD BEAM
Mounting Upright.			
Power Consumption	55W		
Bulbs to Suit	12V 24V	YC1255 YC2470	
Spare Part	9.1308.01	Driving lamp insert	
Compliance	E1) 44404	Ref: 37.5	

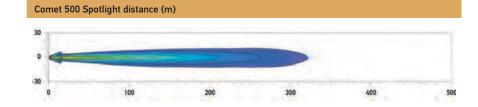

Comet 500 Fog Lamp

Fog lamp with hardened glass lens and tough plastic body. Supplied with protective cover, Part No. 8121.



Part Number	1108		FOG BEAM
Mounting	Upright.		
Power Consumption	55W		
Bulbs to Suit	12V 24V	YC1255 YC2470	
Spare Part	9.1108.01	Fog lamp insert	
Compliance	E1) 18213		

Comet 500 Accessories




Part Number	8121	PROTECTIVE COVER
Part Number	8137	CLEAR PROTECTIVE COVER

P/N 8137









Part Number	1309		SPREAD BEAM
Mounting	Upright or pendant.		
Power Consumption	55W		
Bulbs to Suit	12V 24V	YC1255 YC2470	
Spare Part	9.1309.01	Driving lamp insert	
Compliance	E1) 44410	Ref: 17.5	

Comet 550 Spread Beam Driving

Spread beam driving lamp with hardened glass lens and tough plastic body. Supplied with

protective cover, Part No. 8122.

Comet 550 Spread Beam distance (m)



Comet 550 Fog Lamp

Fog beam driving lamp with hardened glass lens and tough plastic body. Supplied with protective cover, Part No. 8122.



ECE



Part Number	1109	FOG BEAM
Mounting	Upright or pendant.	
Power Consumption	55W	
Bulbs to Suit	12V YC1255 24V YC2470	
Compliance	(E1) 18216	

Comet 550 Accessories






P/N 8138

Comet 100 Spread Beam Driving Lamp


Spread beam driving lamp with modern clear hardened glass lens. The innovative Free-Form (FF) technology ensures concentrated light output.








Part Number	1312		SPREAD BEAM
Mounting	Upright or pendan	t.	
Power Consumption	55W		
Bulbs to Suit	12V 24V	YC1255 YC2470	
Spare Part	9.1312.01	Driving lamp insert	
Compliance	(E1) 651	Ref: 17.5	

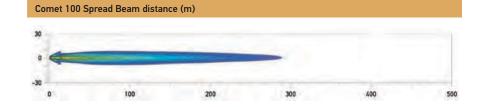

Comet 100 Fog Lamp

Fog beam lamp with modern clear hardened glass lens. The innovative Free-Form (FF) technology ensures concentrated light output.




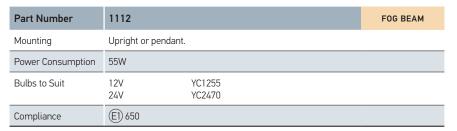










Comet 200 Spread Beam Driving Lamp

Spread beam driving lamp with modern clear hardened glass lens. The innovative Free-Form (FF) technology ensures concentrated light output.





Part Number	1313		SPREAD BEAM
Mounting	Upright.		
Power Consumption	55W		
Bulbs to Suit	12V 24V	YC1255 YC2470	
Spare Part	9.1313.01	Driving lamp insert	
Compliance	E1) 646	Ref: 37.5	

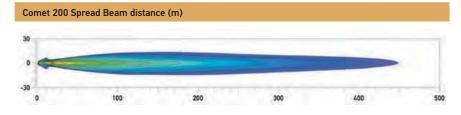





Part Number	1113		FOG BEAM
Mounting	Upright or penda		
Power Consumption	55W		
Bulbs to Suit	12V 24V	YC1255 YC2470	
Spare Part	9.1113.01	Fog lamp insert	
Compliance	E1) 645		

Comet 200 Fog Lamp


Fog beam lamp with modern clear hardened glass lens. The innovative Free-Form (FF) technology ensures concentrated light output.



Comet 300 Spread Beam Driving Lamp

Spread beam driving lamp with modern clear hardened glass lens. The innovative Free-Form (FF) technology ensures concentrated light output.











ECE

Part Number	1314		SPREAD BEAM
Mounting	Upright or penda	ant.	
Power Consumption	55W		
Bulbs to Suit	12V 24V	YC1255 YC2470	
Spare Part	9.1314.01	Driving lamp insert	
Compliance	E1) 649	Ref: 17.5	

Comet 300 Spread Beam distance (m) 30 0 100 200 300 400 500

Comet 300 Fog Lamp

Fog beam lamp with modern clear hardened glass lens. The innovative Free-Form (FF) technology ensures concentrated light output.






Part Number	1114	FOG BEAM
Mounting	Upright or pendant.	
Power Consumption	55W	
Bulbs to Suit	12V YC1255 24V YC2470	
Compliance	(E1) 648	










Part Number	1115		FOG BEAM
Mounting		: ns in or below front apron or front spoilers w tandard mounting bracket and pre-assemble	
Power Consumption	55W		
Bulbs to Suit	12V 24V	YC1255 YC2470	
Spare Part	9.1115.08	Mounting bracket	
Compliance	E1) 877		

Micro DE Fog Lamp

Micro DE high performance compact fog lamp featuring a focused glass lens and modern Free-Form (FF) reflector. HELLA's smallest auxiliary lamp is ideal for front spoilers. Housing and reflector made from magnesium.



Micro DE Fog Beam distance (m)



Fog Lamp - Mounting Bracket

Part Number	9.1115.08	MOUNTING BRACKET	Adjustable mo
			DF lamns


Adjustable mounting bracket to suit Micro DE lamps.



FF 50 Spread Beam Driving Lamp

Compact driving lamp featuring modern clear lens design and Free-Form (FF) reflector.









Part Number	1322		SPREAD BEAM
Mounting	Upright or penda	nt.	
Power Consumption	55W		
Bulb to Suit	CA1255		
Compliance	(E1) 1210	Ref: 12.5	

300

FF 50 Spread Beam distance (m)

100

FF 50 Fog Lamp

Compact fog lamp featuring modern clear lens design and Free-Form (FF) reflector.







Part Number	1122	FOG BEAM
Mounting	Upright or pendant.	
Power Consumption	55W	
Bulb to Suit	CA1255	
Compliance	E1) 1209	


FF 50 Clear Protective Cover



Part Number	8147		

ECE CERTIFIED





FF	/5	Spread	Beam	Driving	La

Compact driving lamp featuring modern clear lens design and Free-Form (FF) reflector.



Part Number	1323	SPREAD BEAM
Mounting	Upright or pendant.	
Power Consumption	55W	
Bulb to Suit	CA1255	
Compliance	E1) 1212 Ref: 12.5	

FF 75 Spread Beam distance (m)



FF 75 Fog Lamp

Compact fog lamp featuring modern clear lens design and Free-Form (FF) reflector.





Part Number	1123	FOG BEAM
Mounting	Upright or pendant.	
Power Consumption	55W	
Bulb to Suit	CA1255	-
Compliance	(E1) 1211	

FF 75 Clear Protective Cover





Contents

Work Lamps

DuraLED® WL550	158
DuraLED® WL750	158
DuraLED® WL1300	159
LED BL350	160
LED Light Bar 470 - Combi	161
LED BL470	162-163
LED Module 50	164
LED Q90 Compact	164
LED M70	165
LED Module 70 Gen IV	165
LED Power Beam 1500	166
LED Power Ream 1800	167

LED Ultra Beam	16
LED Ultra Beam Gen II	16
LED AS3000 RFCommSafe™	17
LED Module 90	17
LED RokLUME 380	172-17
LED HypaLUME	174-17
LED BL350 - 110/230V AC	17
LED Reverse	17
Halogen Ultra Beam	17
Halogen Picador	179-18
Spare Parts and Accessories	18



The superior performance of HELLA LED work lamps is recognised by industry worldwide, with the largest agriculture and construction equipment manufacturers now specifying HELLA LED lighting as original equipment.







In heavy duty work environments, HELLA LED work lamps offer decisive advantages over other lighting technologies.



Highly Efficient Light Output

Highly advanced optics ensure that the right amount of light reaches the area it is most needed. Beam patterns are designed to generate even illumination and avoid bright spots, dark patches or stray light rays that serve no useful purpose.



Low Power Consumption

LED work lamps consume significantly less power than incandescent bulbs resulting in reduced strain on both alternator and battery and lower operating costs.



Long Service Life

High quality materials offer superior impact, shock, vibration, UV and corrosion resistance ensuring an ultra long service life.



Water & Dust Proof

Fully sealed against dust and water ingress, suitable for the harshest environments.

LED Technology

The choice of LEDs, the power supply and thermal management of the work lamp are key factors in achieving optimum light output. The quality of the components used by HELLA ensures, for example, that the light remains at a constant level of brightness in a variety of voltage conditions.

Do you know what the actual light output of your work lamp is?

Some LED work lamp manufacturers typically specify a light output without factoring in the impact of temperature, optical losses or other real world effects on light output performance.

This however, does not correspond to the actual effective light output of the work lamp. When these light values are cited, they are often unrealistically high. Such lumen ratings are referred to as "Raw", "Calculated" "Theoretical" or "Cold lumen".

The lumen ratings of all HELLA work lamps are always based on values obtained from measuring actual lamps. The lumen values correspond to the light that is actually emitted from the work lamp. HELLA LED work lamps emit their full output in ambient temperatures of up to 50°C.


Thermal Management

Good thermal management is necessary to ensure a long service life. When an LED is illuminated, heat is produced. As LED temperature increases, light output decreases and the service life reduces. Efficient design for maximum heat dissipation must be ensured. HELLA uses the latest simulation programs during product development to ensure optimal heat dissipation through the housing.

All HELLA LED work lamps are designed to provide reliable protection against the LEDs overheating. This guarantees long service life as well as consistent light output.



Thermal camera testing ensures heat is efficiently & evenly distributed from sensitive internal components.





Plastic ceramic materials offer many benefits including outstanding thermal performance.

Superior Material choice

Revolutionary plastic ceramic materials, with outstanding thermal performance, open up a world of possibilities that was never thought to be achievable only a few years ago. The replacement of metal based housing heatsinks with thermally conductive plastic not only opens a myriad of design options, but also means complete corrosion resistance. This is especially important in demanding environmental conditions where lights are constantly exposed to the elements and are sometimes temporarily submerged.

A lamp housing made from thermally conductive plastic works much the same as a metal housing. The innovative ceramic based plastic transfers the heat generated by the LEDs and electronics to the outside of the lamp body, thereby lowering the internal thermal stress on the component. This ensures a long service life with minimal degradation of the light output.




HELLA LED work lamps are designed and tested to provide efficient and effective illumination and an ultra long service life.

ILLUMINATION COMPARISONS

Work lamps can be compared by using an informative isolux lighting diagram. These diagrams display the projected light pattern on a surface in the form of isolux lines (lines of equal light intensity). To compare isolux diagrams, various criteria such as installation height, inclination angle and lux scale must be taken into account. An objective comparison is inaccurate if the criteria differ from one another. Comparing diagrams with different colour scales can be easily misinterpreted.

Long Range

Narrow beam range designed to illuminate distant objects between 60m - 200m (depending on lamp installation, installation height and inclination angle).

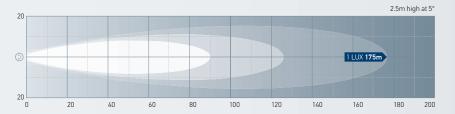


Isolux Lighting Diagram

Isolux diagrams display the projected light pattern on a surface in the form of isolux lines (lines of equal light intensity).

Close Range

Spread beam designed to illuminate an area near the vehicle, range approx. 20m to 60m (depending on installation height and inclination angle).



Flood

Ultra wide spread beam designed to illuminate a large area adjacent to the vehicle, typically emitting an extra wide beam (over 45° each side).







ELIVER

The Light Comparison Tool for Work Lamps

The ELIVER tool allows you to easily test and compare our products against each other in a realistic environment. This lets you find the perfect work lights or auxiliary lights for your individual requirements. You can conveniently compare different technologies, such as halogen, Xenon and LED against each other. You can view the light distribution on a farm track, on a street or under off-road conditions.

ELIVER also provides you with all of the relevant information about performance and technical specifications. This includes information such as the light range, width and intensity. As a special service, you can call up the respective light range diagram or download brief information about the product as a PDF at any time.

Visit www.hella.com/eliver and try it yourself.



HELLA LED Lighting Products with Superior Electromagnetic Compatibility (EMC)


Electromagnetic Compatibility (EMC) is a significant safety concern for many emergency and industrial applications.

As electronic devices such as LED lamps become more common, so does the risk of unintended electromagnetic interference (EMI) that can have adverse effects on other sensitive devices such as radios or communication equipment. It is essential that the circuitry of LED lamps does not cause harmful interference to other devices and at the same time is not susceptible to radiation from other devices.

RFCommSafe™ products were developed in recognition that some radio communication equipment can self-tune to be very sensitive in remote areas. In these situations the limits prescribed by regulatory requirements and as defined in international standards such as EN 55015, CISPR 15, CISPR 25 or relevant UNECE R10, standards may not be sufficient to ensure there is no interference with very sensitive radio communication equipment. Lamps marketed as RFCommSafe™ are designed to go well beyond the requirements of these standards.





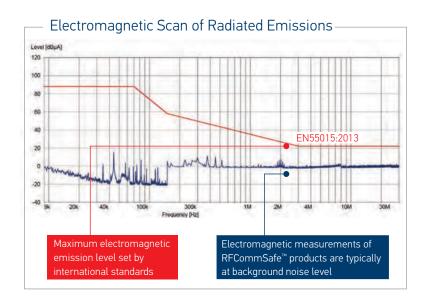

Dual Intensity:


Switch Control

◬

DuraLED® WL550 Work Lamp

LED universal work lamp with low profile stainless steel bracket. Lamp may be mounted upright or pendant and may be adjusted vertically up or down. Totally sealed against dust and moisture and with a superior tolerance to chemical and long term harsh UV exposure Grilamid* lens as well as technologically advanced thermally conductive non-metal housing.



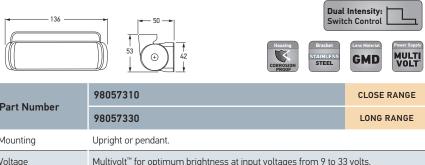

Part Number	98057330	LONG RANGE
Mounting	Upright or pendant.	
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.
Power Consumption	7W	
Actual Light Output	550 lumen	
Protection	Reverse polarity and voltage spike protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)	
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.	
Lens Material	High impact and chemical resistant Grilamid® lens	
Compliance	CE	&

DuraLED® WL750 LED Work Lamp

Featuring an integrated dual intensity circuit, a high level of spike protection and energy efficient Multivolt™ technology, the innovative DuraLED® WL750 will appeal for applications where energy efficiency and reliability is a must. Totally sealed against dust and moisture and with a superior tolerance to chemical and long term harsh UV exposure Grilamid® lens as well as technologically advanced thermally conductive non-metal housing.






Easy adjustment without tools.

Completely sealed lamp/cable entry.

GMD 98095023 CLOSE RANGE Part Number 98095003 LONG RANGE Mounting Upright or pendant. Voltage Multivolt™ for optimum brightness at input voltages from 9 to 33 volts. Power Consumption High intensity mode: 12W (1A@12V/0.50A@24V) Low intensity mode: 2W (0.17A@12V/0.08A@24V) Actual Light Output 750 lumen As per P/N 98057310 Protection Cable Length Pre-wired with 2.5m of sheathed multi-core cable. Lens Material High impact and chemical resistant Grilamid® lens

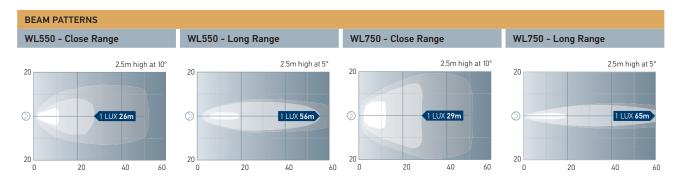

(€

Compliance

















	98074025	CLOSE RANGE
Part Number	Part Number 98074060	
	98074051	FL00D
Mounting	Upright or pendant.	
Voltage	24V	
Power Consumption	14W	
Light Output	900 lumen	
Protection	Reverse polarity and voltage spike protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)	
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.	
Lens Material	High impact and chemical resistant Grilamid* lens	
Compliance	<u>&</u>	

DuraLED° WL1300 RFCommSafe™ LED Work Lamp - 24V DC

LED work lamp developed with RFCommSafe™ technology and 14 high performance LEDs for applications where energy efficiency and reliability is a must. Features a tough, chemical resistant lens made from Grilamid®, a highly impact resistant Swiss-made crystal clear polyamide with superior tolerance to chemical and long term harsh UV exposure, as well as technologically advanced thermally conductive non-metal housing.



















	98074032	CLOSE RANGE
Part Number	98074022	LONG RANGE
	98074002	FL00D
Mounting	Upright or pendant.	
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.
Power Consumption	High intensity mode: 18W Low intensity mode: 2W	
Light Output	1500 lumen	
Protection	Reverse polarity and voltage spike protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)	
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.	
Lens Material	High impact and chemical resistant Grilamid® lens	
Compliance	C€	&

DuraLED® WL1300 LED Work Lamp

The WL1300 LED Work Lamp incorporates the latest technology to offer a powerful, durable lighting solution for a multitude of applications. Featuring an integrated dual intensity light output circuit, a high level of spike protection, and energy efficient Multivolt™ technology, this work lamp will appeal to applications where energy efficiency and reliability are a must.



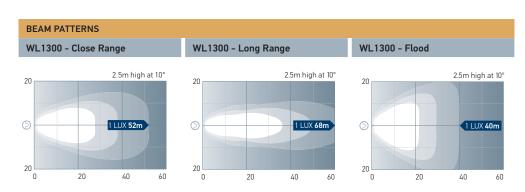


BL350 LED Work Lamp

The BL350 LED Work Lamp incorporates the latest technology to offer a powerful, durable lighting solution for a multitude of applications.

Featuring energy efficient Multivolt™ technology, this work lamp will appeal to applications where energy efficiency and reliability are a must. These lamps offer a formidable net light output of 2200 lumen.

Designed with Fit and Forget durability in mind, the BL350 work lamp features a highly impact resistant lens made of Grilamid®, a crystal clear polyamide with superior tolerance to chemical and long term harsh UV exposure, as well as a technologically advanced thermally conductive non-metal housing.













	1GJ 958 040-551	CLOSE RANGE	
Part Number	1GJ 958 040-601	LONG RANGE	
	1GJ 958 040-501	FL00D	
Mounting	Upright or pendant.		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.	
Power Consumption	25W	25W	
Actual Light Output	2200 lumen		
Protection	Reverse polarity and voltage spike protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)		
Cable Length	Supplied with 2.5m of sheathed multi-core cable.		
Lens Material	High impact and chemical resistant Grilamid* lens		
Spare Parts	8HG 958 053-801 Single spare end plastic bracket		
Compliance	(€	<u>&</u>	






Single plastic bracket disassembled view


Mounting brackets allow rotation of work lamp

BEAM PATTERNS

BL350 - Long Range

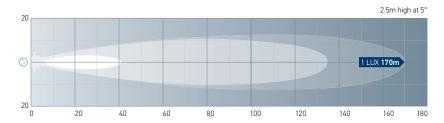


BL350 - Close Range

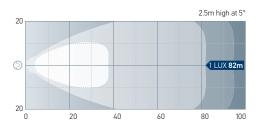

BL350 - Flood















Part Number	1599HD (Close Ra	nge and Long Range)	СОМВІ
Mounting	Upright or pendant.		
Voltage	Multivolt™ for optimu	ım brightness at input voltages from 9 to 3	3 volts.
Power Consumption	Combined: Close/Long Range:	36W 18W/18W	
Maximum Luminous Intensity	77,000 candela		
Actual Light Output	2200 lumen		
Protection	Reverse polarity and transient spike protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)		
Cable Length	Pre-wired with 2.5m of tinned multi-core cable		
Lens Material	High impact and chemical resistant Grilamid® lens		
Accessories	8032 Number plate bracket light bar 470 8HG 958 128-811 HD double mount stainless steel feet (one pair) 8HG 958 139-071 HD single spare end bracket kit 8XS 958 337-021 LED Light Bar - Clear protective cover 8XS 958 337-031 LED Light Bar - Amber protective cover 8XS 958 337-111 LED Light Bar - Protective cover		e pair)
Compliance	&		

LED Light Bar 470 - Combi Work Lamp

The LED Light Bar 470 Combi is a unique work lamp offering three light options: close range, long range or combined - all in a single light bar. The work lamp is a great addition to any Ute, ATV or off-road vehicle.


Only 1kg of weight means less stress on mounting locations, the low profile design will not restrict cooling airflow when fitted to the front of a vehicle - which can be a problem with larger lights. Don't be fooled by its size though, this light bar certainly punches above its weight with its long distance and spread light output. MultivoltTM circuitry means the lamp can be used with both 12V or 24V DC systems, whilst only consuming 36W. Any input between 9 to 33 volts will give optimum brightness.

The adjustable mounting system ensures for easy installation and flexibility for any orientation. Providing unmatched corrosion resistance due to an innovative thermally conductive polymer housing, and the toughness of a UV, chemical and impact resistant Grilamid® lens. The Combi Work Lamp is the natural choice when exceptional durability and long term reliability in demanding environments is needed.




Mounting brackets can be positioned to suit most vehicle installations.

8HG 958 128-811 HD double mount stainless steel feet




BEAM PATTERNS

Combi Light Bar 470 - Combined (Close Range and Long Range)

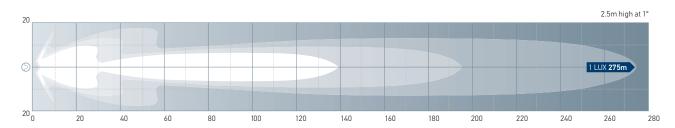

Combi Light Bar 470 - Close Range









NOTE:

A work lamp must be switched independently of headlamps when mounted on a vehicle.

BL470 LED Work Lamps


The BL470 work lamp comes in two different beam patterns - close range or long range, making it a great work lamp for an array of applications like agriculture and construction.


It is a high performance lamp with a light output of 2800 lumen for either spread or distance whilst only consuming 36W.

Multivolt™ circuitry means the lamp can be used with both 12V or 24V DC systems, whilst only consuming 36W on high or 4W on low.

Any input between 9 to 33 volts will give optimum brightness. The dual function level (100% and 10%) is also handy for reducing power consumption during long term use, or when operating on battery power.

The adjustable mounting system ensures for easy installation and flexibility for any orientation. Providing unmatched corrosion resistance due to an innovative thermally conductive polymer housing, and the toughness of a UV, chemical and impact resistant Grilamid® lens, the BL470 is the natural choice when exceptional durability and long term reliability in demanding environments is needed.













	PRUUF	
Part Number	1GJ 958 130-621	CLOSE RANGE
Part Number	1GJ 958 130-651	LONG RANGE
Mounting	Upright or pendant.	
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.
Power Consumption	High: 36W Low: 4W	
Actual Light Output	High: 2800 lumen Low: 280 lumen	
Protection	Reverse polarity and transient spike protection. IP 6K7 (Protection against dust and temporary water immersion IP 6K9K (Protection against dust and high-pressure/steam jet c	•
Cable Length	Supplied with 2.5m of sheathed multi-core cable.	
Lens Material	High impact and chemical resistant Grilamid® lens	
Spare Parts	8HG 958 128-811 HD double mount stainless steel feet (o	ne pair)
Compliance	C€	&







8HG 958 128-811 HD double mount stainless steel feet


HD stainless steel mounting brackets allow 360° rotation of work lamp.




BEAM PATTERNS BL470 - Close Range

2.5m high at 5°

BL470 - Long Range

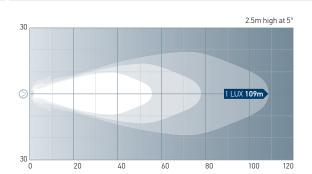

WORK LAMPS

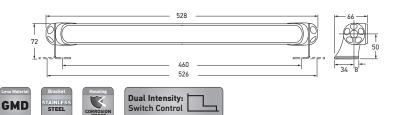

Part Number	1GJ 958 130-521	DIFFUSE FLOOD
Mounting	Upright or pendant.	
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.
Power Consumption	High: 36W Low: 4W	
Actual Light Output	3600 lumen	
Protection	Reverse polarity and transient spike protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)	
Cable Length	Supplied with 2.5m of sheathed multi-core cable.	
Lens Material	High impact and chemical resistant Grilamid® lens	
Spare Parts	8HG 958 128-811 HD double mount stainless steel feet (c	one pair)
Compliance	C€	<u>&</u>



HD stainless steel mounting brackets allow 360° rotation of work lamp.

8HG 958 128-811 HD double mount stainless steel feet

BL470 LED Work Lamp - Diffuse Flood


The BL470 LED work lamp featuring a unique diffuse flood lens with a powerful light output of 3600 lumen while only consuming 36W.

The new lamp is ideal for illuminating decks, garages, workshops, trailers, caravans and other close range applications where large amounts of light are needed. The ultra-smooth spread has no harsh borders or hotspots, therefore reducing eye strain and fatigue.

Providing unmatched corrosion resistance due to an innovative thermally conductive polymer housing, and the toughness of a UV, chemical and impact resistant Grilamid® lens, the BL470 is the natural choice when exceptional durability and long term reliability in demanding environments are needed.

The new work light features $Multivolt^{\mathsf{TM}}$ circuitry, operating between 9 to 33V, and can therefore be used with 12V or 24V DC supply. The dual function level (100% and 10%) is also handy for reducing power consumption during long term use. Designed with Fit and Forget durability in mind, the completely sealed BL470 is covered by a 5 year warranty.




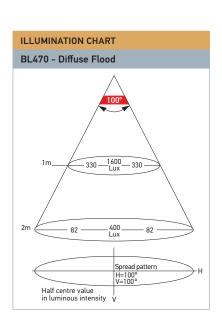


Module 50 LED Ultra-Compact Work Lamp

The Module 50 LED is the smallest work lamp in the HELLA product range and is therefore particularly suitable for installations with space constraints. At 800 lumens, the light output is well suited to close-range illumination. There is also an optic-free version that facilitates long-range and/or spot illumination.












Part Number	1560	CLOSE RANGE
Part Number	1560-LR LONG	
Mounting	Upright.	
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	volts.
Power Consumption	15W	
Actual Light Output	800 lumen	
Protection	Reverse polarity protection. IP 6K8 (Protection against dust and prolonged water immersion IP 6K9K (Protection against dust and high-pressure/steam jet c	
Cable Length	Supplied with 2m of sheathed twin core cable and DT plug.	
Spare Part	9.1557.05 Plug and lead 0.75mm²	
Compliance	(E1) ECE R10	A




P/N 1560-LR

Module 50 - Close Range

BEAM PATTERNS







Q90 Compact LED Work Lamp

The Q90C LED is a robust LED work lamp in a universal, attractive design. The innovative thermally conductive synthetic material housing also features cooling fins which ensure the required heat dissipation from the 4 high-power LEDs. The Q90C LED offers the advantage of complete corrosion resistance.












Part Number	1563C	CLOSE RANGE
Mounting	Upright or pendant.	
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.	
Power Consumption	16W	
Actual Light Output	1200 lumen	
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersior IP 6K9K (Protection against dust and high-pressure/steam jet c	
Cable Length	Supplied with 500mm of cable	
Compliance	E12 ECE R10	<u>&</u>

BEAM PATTERN

Q90 - Close Range



techfeedback@hella.co.nz







	83	74
0	83 M10	
	► H	 48

Part Number	1547-LED	CLOSE RANGE
Mounting	Upright or pendant.	
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.
Power Consumption	13W	
Actual Light Output	800 lumen	
Protection	Reverse polarity and voltage spike protection. IP 6K7 (Protection against dust and temporary water immersion IP 6K9K (Protection against dust and high-pressure/steam jet of	•
Cable Length	Supplied with 2m of sheathed cable.	
Compliance	(€)	<u> </u>

Part Number	CLOSE RANGE LED WORK LAMP - EXTENDED VOLTAGE	
Part Number	1547-LEDEV	CLOSE RANGE
Voltage	Multivolt™ for optimum brightness at input voltages from 10 to 100 volts.	
Actual Light Output	600 lumen	
Other specifications as per P/N 1547-LED		

M70 LED Work Lamp - Close Range


M70 LED Multivolt™ work lamp features 4 high performance white LEDs providing consistent close range illumination and lamp protection with 12 or 24V systems. High-sheen metallised Free-Form (FF) reflector and clear glass lens. Housed in an impact resistant aluminium die-cast housing, fully sealed for an ultra long service life in demanding high vibration environments.





Compliance



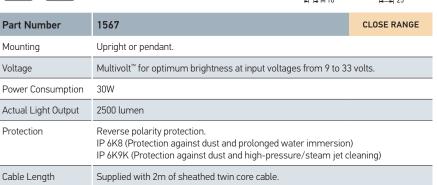

Module 70 LED Gen IV Work Lamp

Equipped with 3 high-performance multi-chip LEDs the new M70 LED work lamp produces 2500 lumens of crisp white light while consuming just 30W of power. Completely sealed (IP 6K9K) this lamp is particularly suitable for tough conditions and work areas. Advanced Multivolt™ 9-33V electronics ensure reliable illumination and lamp protection even under severe voltage fluctuations and low battery voltage.



BEAM PATTERNS M70 - Close Range M70 Gen IV - Close Range 2.5m high at 10° 2.5m high at 12° 20 1 LUX **60m** 20 40 80


(E1) ECE R10

 \otimes

Power Beam 1500 LED Work Lamp

Premium LED work lamp with aluminium housing. Light output rated at 1300 lumen.










Part Number	1557	CLOSE RANGE
Mounting	Upright or pendant.	
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.
Power Consumption	22W	
Actual Light Output	1300 lumen	
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion IP 6K9K (Protection against dust and high-pressure/steam jet c	•
Cable Length	Supplied with 2m of sheathed multi-core cable and DT plug.	
Spare Part	9.1557.05 Plug and lead 0.75mm²	
Compliance	E) ECE R10	&

Power Beam 1500 LED Work Lamp - Heavy Duty

Premium heavy duty LED work lamp with aluminium housing. Light output rated at 1300 lumen.
















Part Number	1557-HD	CLOSE RANGE	
Part Number	1557-HDLR	LONG RANGE	
Mounting	Upright or pendant.		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.	
Power Consumption	22W		
Actual Light Output	1300 lumen		
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)		
Cable Length	Supplied with 2m of sheathed twin core cable and DT plug.		
Spare Part	9.1557.05 Plug and lead 0.75mm²		
Compliance	(E) ECE R10	<u>&</u>	

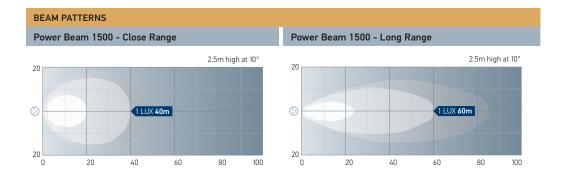





Power Beam 1800 LED Work Lamp


Premium LED work lamp with a light output rated at 1850 lumen. RFCommSafe™ ensures no inference with radios and other electronic components.



Co	R	F 1Sa	ife"
(ζŁ	3	'n
	, [31	Z,

Don't Niverbox	12 VOLT	24 VOLT	
Part Number	1561-12V	1561-24V	CLOSE RANGE
Mounting	Upright or pendant.		
Power Consumption	36W		
Actual Light Output	1850 lumen		
Protection	Reverse polarity and voltage spike protection. IP 6K8 (Protection against dust and prolonged water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)		
Cable Length	Pre-wired with 2m of sheathed twin core cable and DT plug.		
Spare Part	9.1557.05 Plug ar	nd lead 0.75mm²	
Compliance	E) ECE R10		<u>&</u>

BEAM PATTERNS Power Beam 1800 - Close Range

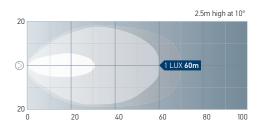

DISCOVER ELIVER

The unique online comparison tool for light distribution.

With ELIVER, you can easily compare work lamps online – and get a realistic idea of the light yield. **Get the right light for your everyday work.**



www.hella.com/eliver

Ultra Beam LED Work Lamp

The Ultra Beam LED offers high light output in a practical design, meaning that it can be used anywhere thanks to its compact dimensions. The light output is a powerful 2,200 lumens with a power consumption of only 30W. The light is distributed by a specially developed multifaceted reflector, thus ensuring homogeneous illumination.









P/N 1562-BL

P/N 1562-LR





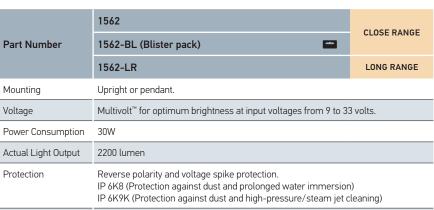


Supplied with 2m of sheathed twin core cable and DT plug.

Plug and lead 0.75mm²

Ultra Beam LED Work Lamp - Heavy Duty

The Ultra Beam LED work lamp - heavy duty offers all the outstanding properties of the 1562 with an additional heavy duty bracket suitable for heavy duty use.













Part Number

Cable Length

Spare Part

Compliance


1562-HD


9.1557.05


(E1) ECE R10

CLOSE RANGE

Other specifications as per P/N 1562

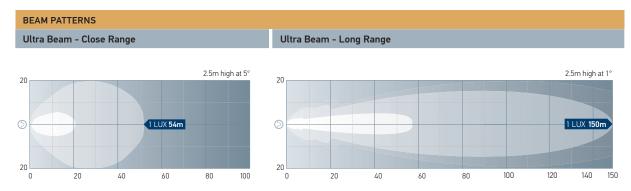











Part Number	1566-HD	CLOSE RANGE	
Part Number	1566-HDLR	LONG RANGE	
Mounting	Upright or pendant.		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.	
Power Consumption	56W		
Actual Light Output	4000 lumen		
Protection	Reverse polarity and voltage spike protection. IP 6K8 (Protection against dust and prolonged water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)		
Cable Length	Supplied with 2m of sheathed twin core cable and DT plug.		
Spare Part	9.1557.05 Plug and lead 0.75mm²		
Compliance	(E) ECE R10	<u>&</u>	

Ultra Beam Gen II LED Work Lamp

The Ultra Beam LED Gen II can replace even the Xenon work lights without any problems. The light is distributed by a specially developed multifaceted reflector, thus ensuring homogeneous illumination. Despite the enormous light yield, the Ultra Beam LED Gen II is efficient, using just 56 watts.







P/N 1566-HDLR

BEAM PATTERNS

Ultra Beam Gen II - Close Range

Ultra Beam Gen II - Long Range

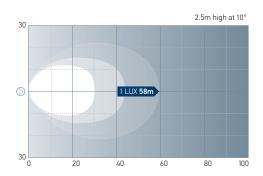

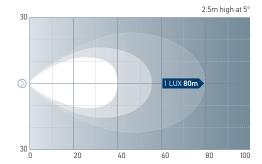


AS3000 RFCommSafe™ LED Work Lamp - Heavy Duty

The AS3000 is a high output, compact and versatile heavy duty work lamp for use on mining machinery developed with RFCommSafe™ Technology. A multi-adjustable bracket ensures accurate, stable aiming in high vibration environments. Option of three light patterns, long range, close range or flood. RFCommsafe™ products offer superior electromagnetic compatibility (EMC) dramatically removing the risk of unintended electromagnetic inference (EMI) on sensitive devices such as radios or communication equipment well beyond the requirement of international standards.



P/N 1GA 958 060-501 Long Range















	12 VOLT	24 VOLT	
	1GA 958 060-401	1GA 958 060-011	CLOSE RANGE
Part Number	1GA 958 060-501	1GA 958 060-111	LONG RANGE
	1GA 958 060-601	1GA 958 060-201	FLOOD
Mounting	Upright or pendant.		
Power Consumption	High intensity mode: 45W Low intensity mode: 20W	·= · ·	
Actual Light Output	3000 lumen		
Protection	Reverse polarity and voltage spike protection. IP 6K7 (Protection against temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)		
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable		
Lens Material	High impact and chemical resistant Grilamid* lens		
Compliance	<u> </u>		

BEAM PATTERNS

AS3000 RFCommSafe[™] - Long Range




P/N 1GA 958 060-401 Close Range



P/N 1GA 958 060-601





Rear view

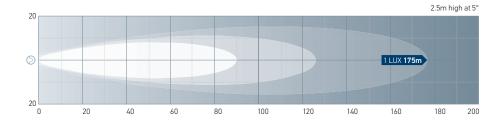



AS3000 RFCommSafe™ - Close Range

AS3000 RFCommSafe™ - Flood

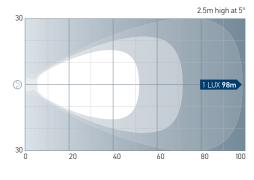









Part Number	1564	CLOSE RANGE	
Part Number	1564-LR	LONG RANGE	
Mounting	Upright or pendant.		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.		
Power Consumption	36W		
Actual Light Output	3400 lumen		
Protection	Reverse polarity and voltage spike protection. IP 6K8 (Protection against dust and prolonged water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)		
Cable Length	Supplied with 2.0m of sheathed cable with DT plug.		
Spare Part	9.1557.05 Plug and lead 0.75mm²		
Compliance	(E) ECE R10	&	

Module 90 LED Work Lamp


The Module 90 LED is a robust work lamp in a universal, attractive design. The black aluminium housing features cooling fins which ensure the required heat dissipation from the 4 high-power LEDs. In addition, temperature sensors protect the work lamp from overheating. The light is distributed by a specially developed, multifaceted reflector, thus ensuring homogeneous illumination.






P/N 1564-LR

BEAM PATTERN Module 90 - Close Range

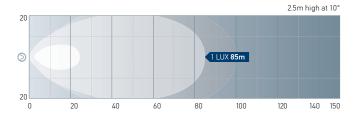

Module 90 - Long Range

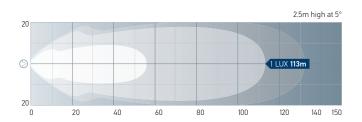

RokLUME 380 LED Work Lamp - Close Range


The LED RokLUME 380 close range features a powerful light output of 7500 measured lumens and an extremely robust design, ideal for the most demanding environments and applications. The latest LEDs and engineered optics combine to produce a broad and even light reaching up to 142m long by 100m wide. The colour temperature of 5000K is similar to daylight meaning improved comfort and reduced eye strain over long periods of use.





RokLUME 380 - Back view












Part Number	1GA 996 197-011	CLOSE RANGE
Mounting	Upright or pendant.	
Voltage	20-32V	
Power Consumption	84W	
Actual Light Output	7500 lumen	
Protection	Reverse polarity and voltage spike protection. IP 6K8 (Protection against dust and prolonged water immersion IP 6K9K (Protection against dust and high-pressure/steam jet of	
Housing	NanoSafe Techonolgy: Non-stick and easy to clean surface coating. Three additional layers are implemented into the NanoSafe coating leading to much higher and longer resistance against corrosion.	
Cable Length	300mm harness with DT socket (counter plug supplied)	
Compliance	ECE R10	<u>&</u>

BEAM PATTERN

RokLUME 380 - Close Range

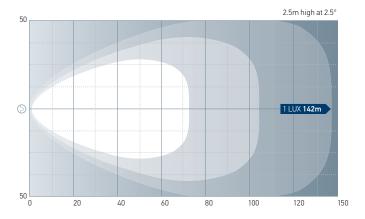


NanoSafe


Housing Technology

The RokLUME work lamps feature an advanced NanoSafe non-stick and easy to clean surface coating. Three additional layers were implemented into the NanoSafe coating leading to much higher and longer resistance against corrosion.

The NanoSafe technology is ideal for mining applications, where conditions are extremely harsh.













Part Number	1GA 996 197-001	CLOSE RANGE
Mounting	Upright or pendant.	
Voltage	20-32V	
Power Consumption	84W	
Protection	Reverse polarity and voltage spike protection. IP 6K8 (Protection against dust and prolonged water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)	
Housing	NanoSafe Techonolgy: Non-stick and easy to clean surface coating. Three additional layers are implemented into the NanoSafe coating leading to much higher and longer resistance against corrosion.	
Cable Length	300mm harness with DT socket (counter plug supplied)	
Compliance	ECE R10	<u> </u>

RokLUME 380 LED Work Lamp - ZEROGLARE

The LED RokLUME 380 **ZERO**GLARE brings the safety and comfort of highway driving to mining operations. The **ZERO**GLARE optical system features a powerful light output with a sharp horizontal cut-off, similar to a low beam headlamp. This ensures no light is directed into the eyes of oncoming drivers or other workers, therefore enhancing site safety. The cut off beam also significantly reduces glare in conditions such as fog or dust.






RokLUME 380 - Back view

BEAM PATTERNS

ROKLUME 380 - ZEROGLARE

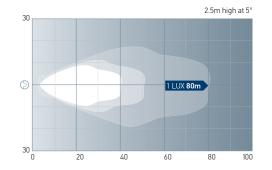

ZEROGLARE Technology

The innovative **ZERO**GLARE optical system ensures all emitted light is only directed below the horizontal plane where it is needed and not into oncoming operators field of vision.








HypaLUME 48V DC RFCommSafe™ LED Flood Light - Heavy Duty

The 48V DC RFCommSafe™ HypaLUME has been designed for applications where high output lighting in extreme environments is required. The lamp produces a net output of 28,000 lumens whilst only consuming 300W. The LEDs have a colour temperature of 5700K to provide a near daylight work environment that is optimal for fatigue avoidance and high alertness. The LED driver electronics ensure light output remains stable over a wide range of voltage variations. The built-in soft start feature eliminates a high in-rush current at start up. 48V DC HypaLUME is designed to RFCommSafe™, ultra low emission (EMC) requirements surpassing International Standards by a wide margin.



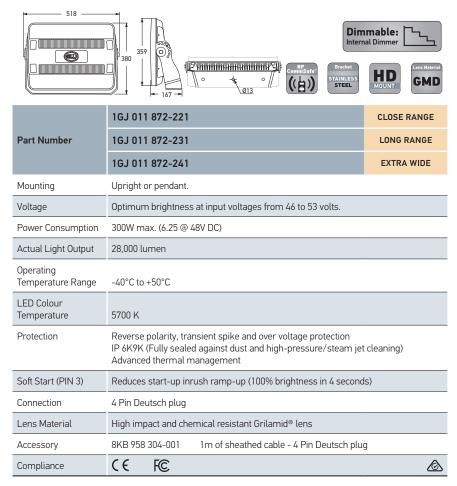







BEAM PATTERNS



Front view


Side view


Rear view

Locking mechanism




Accessory Cable - P/N 8KB 958 304-001






HypaLUME 48V DC - Long Range HypaLUME 48V DC - Extra Wide 5m high at 5°














	1 107 1	
	1GJ 011 872-501	CLOSE RANGE
Part Number	1GJ 011 872-511	LONG RANGE
	1GJ 011 872-521	EXTRA WIDE
Mounting	Upright or pendant.	
Voltage	Optimum brightness at input voltages from 22 to 52 volts.	
Power Consumption	260W max. (10A @ 24V DC)	
Actual Light Output	25,000 lumen	
Operating Temperature Range	-40°C to +50°C	
LED Colour Temperature	5700 K	
Protection	Reverse polarity, transient spike and over voltage protection IP 6K9K (Fully sealed against dust and high-pressure/steam jet Advanced thermal management	cleaning)
Cable Length	Supplied with 1.8m of easy plug-in sheathed cable	
Connection	4 Pin Deutsch plug	
Lens Material	High impact and chemical resistant Grilamid® lens	
· · · · · · · · · · · · · · · · · · ·	·	



 \in



ISO 13766



CISPR25



<u></u>

Locking mechanism

Compliance

Rear view

FC.

Side view

Front View


HypaLUME 24/48V DC LED Flood Light - Heavy Duty


The 24/48V DC HypaLUME has been designed for applications where high output lighting in extreme environments is required. The lamp produces a net output of 25,000 lumens whilst consuming less than 260W. Comprehensive sealing and anti-corrosion measures have been taken to ensure this lamp with stands the toughest conditions. The premium aluminium housing is corrosion resistant with a nonstick and easy to clean surface coating. The LEDs have a colour temperature of 5700K to provide a near daylight work environment that is optimal for fatigue avoidance and high alertness. The LED driver electronics ensure light output remains stable over a wide range of voltage variations. The HypaLUME is also protected from reverse polarity and short circuit faults.



BEAM PATTERNS

HypaLUME 24/48V DC - Close Range









Supplied with 1.8m of easy plug-in sheathed cable

HypaLUME 24/48V DC - Long Range

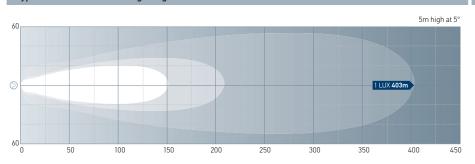


HypaLUME 24/48V DC - Extra Wide



HypaLUME 110/230V AC LED Flood Light - Heavy Duty

The 110/230V AC HypaLUME has been designed for applications where high output lighting in extreme environments is required. The lamp produces a net output of 28,000 lumens at a voltage input range of 100-240V AC whilst only consuming 300W. Comprehensive sealing and anti-corrosion measures have been taken to ensure this lamp with stands the toughest conditions. The premium aluminium housing is corrosion resistant with a non-stick and easy to clean surface coating. The LEDs have a colour temperature of 5700K to provide a near daylight work environment that is optimal for fatigue avoidance and high alertness.















	1GJ 958 334-011	CLOSE RANGE
Part Number	1GJ 958 334-021	LONG RANGE
	1GJ 958 334-031	EXTRA WIDE
Mounting	Upright or pendant.	
Voltage	Optimum brightness at input voltages from 100 to 240V AC	
Power Consumption	300W max.	
Actual Light Output	28,000 lumen	
Operating Temperature Range	-40°C to +50°C	
LED Colour Temperature	5700 K	
Protection	IP 66 (Protection against dust and high pressure water jets) IP 67 (Protection against dust and temporary water immersion) Advanced thermal management	
Cable Length	Supplied with 2.0m of easy plug-in sheathed cable	
Connection	Wieland RST Mini - 16A	
Lens Material	High impact and chemical resistant Grilamid® lens	
Compliance	AS/NZS 60598.2.5 (€ 	<u>&</u>









Front view


Side view

Rear view


Locking mechanism




Supplied with 2.0m of easy plug-in sheathed cable.




BEAM PATTERNS HypaLUME 110/130V AC - Close Range 5m high at 15°



HypaLUME 110/130V AC - Long Range

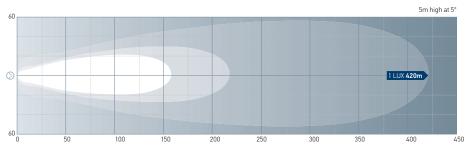

HypaLUME 110/130V AC - Extra Wide




WORK LAMPS











66	
680	
100	1
\square	50 ↓
34 8	
34 6	

Part Number	BLACK BASE	WHITE BASE			
	1GJ 958 084-101	1GJ 958 084-111	CLOSE RANGE		
	1GJ 958 084-201	1GJ 958 084-211	LONG RANGE		
	1GJ 958 084-001	1GJ 958 084-011	FL00D		
Mounting	Upright or pendant.				
Voltage	90 to 305V AC				
Power Consumption	Maximum 26W Lamp and LED Driver 0.10A @ 240V AC				
Actual Light Output	2200 lumen				
Operating Temperature	LED Driver: -35 to 70°C LED Lamp: -40 to 40°C				
LED Driver Protection	Short circuit, over current, over voltage, over temperature. IP 67 (Protection against dust and temporary water immersion)				
LED Lamp Protection	IP 66 (Protection against dust and high pressure water jets) IP 67 (Protection against dust and temporary water immersion)				
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.				
Lens Material	High impact and chemical resistant Grilamid® lens				
Spare Parts	8HG 958 128-811 HD dou	uble mount stainless steel feet (C	ne pair)		
Compliance	AS/NZS 60598.2.1 (€		&		

BL350 LED Work Lamp - 110/230V AC

The lamp features a revolutionary ceramic based, non corrosive, thermally conductive housing and a high performance impact resistance Grilamid® lens. With those properties, the work lamp is ideal for rough outdoor applications, e.g. pool areas, seaside applications, alley ways, car parks etc.

The waterproof, maintenance free and hermetically sealed lamp is also dimmable, either by 0-10V DC dimming control, resistance or pulse width modulation (not supplied). A flexible, adjustable mounting system ensures easy installation to suit a wide range of applications.






P/N 1GJ 958 084-011 - White Housing

BEAM PATTERNS


BL350 110/230V AC - Long Range

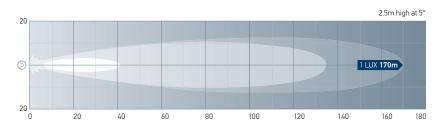




HD stainless steel mounting brackets allow 360° rotation of work lamp.

BL350 110/230V AC - Close Range

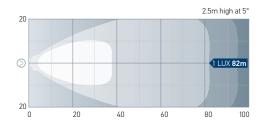

BL350 110/230V AC - Flood





LED Driver

M70 LED Reversing Lamp

M70 LED Multivolt™ reversing lamp features 4 high performance white LEDs providing consistent close range illumination and lamp protection with 12 or 24V systems. Housed in an impact resistant aluminium die-cast housing, fully sealed for an ultra long service life in demanding high vibration environments.















Part Number	1547-RE				
Mounting	Upright or pendant. Lamp inclined 18° downwards.				
Voltage	Multivolt™ for optimum brightness at input voltages in 12 and 24 volt systems.				
Power Consumption	13W				
Actual Light Output	800 lumen				
Protection	Reverse polarity and voltage spike protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)				
Cable Length	Supplied with 2m of sheathed cable.				
Compliance	(E) 3902 ECE R10 ECE R23				

Power Beam 1000 LED Reversing Lamp - Heavy Duty

LED reversing lamp features 6 LEDs providing consistent illumination with 12 or 24V systems. Reversing lights in particular are exposed to the rigors of water, salts and stones. CoroSafe technology offers the new Power Beam 1000 reversing light optimum protection from corrosion. Its grey powder-coated aluminium housing is treated with special chemical processes so that it can withstand the toughest conditions.
















Part Number	1551-RE				
Mounting	Upright or pendant. Lamp inclination of 25° downwards.				
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.				
Power Consumption	14W				
Light Output	850 lumen				
Protection	Reverse polarity and Transient Voltage Suppressor (TVS). IP 6K8 (Protection against dust and prolonged water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)				
Cable Length	Supplied with 2.5m of sheathed twin core cable and DT plug.				
Spare Part	9.1549.05	Plug and lead			
Compliance	E1 3249	ECE R10	ECE R23		

Q90 Compact LED Reversing Lamp

The Q90C LED is a robust LED reversing lamp in a universal, attractive design. The innovative thermally conductive synthetic material housing also features cooling fins which ensure the required heat dissipation from the 4 high-power LEDs. The Q90C LED offers the advantage of complete corrosion resistance.












Part Number	1563C-RE			
Mounting	Upright or pendant. Lamp inclined 25° downwards.			
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.			
Power Consumption	16W			
Actual Light Output	1000 lumen			
Protection	As per P/N 1547-RE			
Cable Length	Supplied with 500mm of cable			
Compliance	(E12) ECE R10 (E1) 4576 ECE R23	<u>&</u>		







	1533		12 VOLT
Part Number	1533-24V		24 VOLT
	1533-DT24V (With Deutsch DT plug)		
Mounting	Upright, side or pendant mounting thro U-shape four point fixing bracket with and vertical surfaces.		
Power Consumption	12V 55W/35W 24V	70W	
Bulbs to Suit	12V YC1255 24V	YC2470	
Protection	IP 6K4K (Protection against dust and w IP X9K (Protection against high-pressu	· ·	
Spare Parts	9.1533.01 Insert 9.1533.05 Plug and lead 9.1533.08 Pedestal bracket 9.1530.07 Stainless steel bracket 9.1549.05 Deutsch plug and	acket 2.5m of sheathed cable (DT)
Not suitable for 100W b	lbs.		


Close Range Halogen Work Lamp

Halogen work lamp with Free-Form (FF) reflector for uniform close range illumination. Made of die-cast aluminium. Glass lens bonded with reflector to be dust and moisture-proof. Shock-proof plastic housing. External wiring connection. DT version with 2 pin Deutsch rear plug.









Part Number	1519		12 VOLT
	1519-24V		24 VOLT
Mounting	Upright or pendant		
Power Consumption	12V - 55W 24V - 70W		
Bulbs to Suit	12V 24V	YC1255 YC2470	
Protection	IP 5K4K (Protection	n against dust and water splash)	
Spare Part	9.2859.02	FF insert	
Not suitable for 100W b	ulbs.		


Close Range Halogen Work Lamp

Halogen work lamp with black fibre reinforced ABS housing and Free-Form (FF) reflector for close range, uniform illumination.




BEAM PATTERNS P/N 1533 - Close Range Halogen

at 15°




P/N 1519 - Close Range Halogen



Close Range Halogen Work Lamp

Compact Halogen work lamp with a Free-Form (FF) brilliant round reflector. The non-patterned lens reduces light scatter and provides close range uniform illumination of the work area. Reflector made from die-cast aluminium. The lamp's ingenious bracket design allows it to be swivelled 360°, as well as the normal lateral adjustment.










Part Number	1547	12 VOLT
	1547-24V	24 VOLT
Mounting	P/Ns 1547 and 1547-24V suitable for upright mounting with M1	0 fixing screw.
Power Consumption	12V - 55W 24V - 70W	
Bulbs to Suit	12V YC1255 24V YC2470	
Protection	IP 5K9K (Protection against dust and high-pressure/steam jet of	cleaning)
Not suitable for 100W b	ulbs.	

Long Range Halogen Work Lamp

Work lamp with handle and switch. Black fibre-glass reinforced plastic housing with extended edge to protect lens.










Part Number	1512		12 VOLT	
Mounting	Full swivel four p	Full swivel four point fixing bracket for mounting on flat or slightly curved surfaces.		
Power Consumption	55W			
Bulbs to Suit	YC1255			
Protection	IP 5K4K (Protect	tion against dust and water splash)		
Spare Parts	9.1511.01 9.1511.06 9.1511.08 9.1512.01 9.1513.01	Close range insert On-off rotary switch Mounting bracket assembly Long range insert Combination range insert		
Not suitable for 100W be	ulbs.			

BEAM PATTERN

P/N 1512 - Long Range Halogen



Stainless Steel Bracket Assembly

Upper and lower stainless steel bracket and lamp mounting bolt. Suitable for 42mm wide lamp mounts.

Part Number	STAINLESS STEEL BRACKET ASSEMBLY	
Part Number	9.1530.07	
To Suit	42mm wide lamp mount.	



Part Number	ULTRA BEAM PIPE SOCKET BASE	
	9.1531.08	
Mounting	Pipe socket mounting system. Allows work lamps be to be mounted on vehicles and removed again quickly.	
Features	Integrated power feed is via the pipe socket. No separate wiring is necessary for the work lamp. Tightening the wing nut attaches the pipe socket attachment tightly to the base. Suitable for P/Ns 8007, 8007FM, 8007RA and 8008.	
To Suit	42mm wide lamp mount.	

Ultra Beam Pipe Socket Base

Suitable for applications that require a removable work lamp.



Part Number	PEDESTAL BRACKET
	9.1533.08
Pedestal swivel bracket	to suit most work lamps.



Dout Number	PLASTIC BRACKET
Part Number	9.1564.08
To Suit	42mm wide lamp mount.



Part Number	PLUG AND LEAD
	9.1533.05 (AMP - 2 pin plug and 150mm cable)
To Suit	P/N 1533




Part Number	SPIRAL CABLE COMPLETE PLUG	
Part Number	9.1520.07 (Plug and 2m extendable sheathed cable)	
To Suit	P/Ns 1520, 1521, 1522, 1523, 1524 and 1525.	



	2 PIN DEUTSCH PLUG AND LEAD TO SUIT LED AND HID WORK LAMPS	
Part Number	9.1557.05 (2m of sheathed cable)	0.75mm²
	9.1549.05 (2.5m of sheathed cable)	1.25mm²
To Suit	LED and HID work lamp P/Ns 1551, 1551-RE, 1556, 1557 and 1559.	



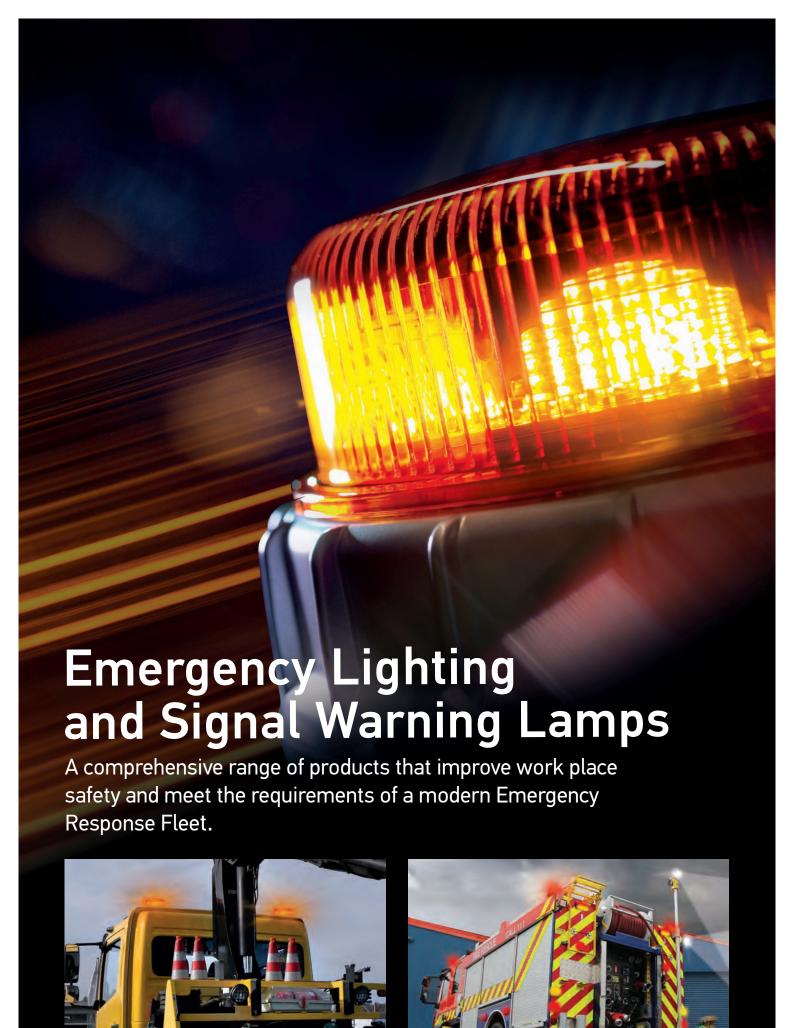


Contents

Emergency Lighting and Signal Warning Lamps

K-LED Beacons	188
LED Rotating/Flashing Beacons	189
RotaLED Beacons	190-191
KL7000LED Beacons	192
LED Highlighter Light Bars	193
LED Multi-flash Signal Lamps	194
DuraLED® Multi-flash Signal Lamps	195
LED Signal Warning Lamps	196-197
Revolving Beacons KL 700	198
Revolving Beacons KL 7000	199
Revolving Beacons Rotaflex/Rotafix	200
Strobe Beacon Firebolt Plus	201
Pipe Mount Accessories	202
Revolving Beacon Spare Parts	203

HELLA EMERGENCY AND SIGNAL WARNING LIGHTING

HELLA's extensive range of LED Emergency Lighting and Signal Warning Lamps provide high levels of performance and reliability for situations where a powerful warning light is required.

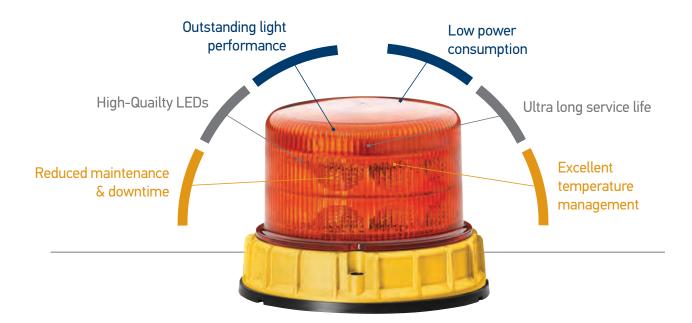

LED is the most desired light technology by emergency services due to the many features it offers: ultra-long service life, low power consumption, outstanding light performance, reduced downtime and maintenance requirements.

Quality materials and robust construction are combined to handle demanding and harsh environments.

High-quality components, advanced technology and no moving parts offer extremely long design life. LEDs are solid state components and thus demonstrate a considerable higher vibration resistance compared to bulb and motor driven products.

HELLA's rotating and signal warning lamps, offer choices of signal colour, luminous intensities, flash patterns and supply voltages, providing a complete range of warning lamps to suit most applications and performance requirements.

The rotating light pattern is well recognised as a highly effective warning signal in all conditions, even in bright sunlight. Instant activation is ensured from ambient temperatures ranging from -40°C to $+60^{\circ}\text{C}$.

HELLA LED products must meet the highest quality requirements before being approved for the market.









Light output in accordance with ECE Regulation R65

ECE regulations are performance standards that are mandated in Europe and accepted by many other countries, including New Zealand.

ECE R65 relates to beacons, flashing and rotating, and requires a minimum light output as well as other mechanical and electrical tests (e.g. EMC, vibration etc).

Most of our beacons comply to ECE standards, however we supplement our range with SAE (American standards) lamps as well, which are also accepted in New Zealand.



Choose the right lamp for you

Selecting the right product is not always easy. With the online product comparison tool Eliver you can simulate light distribution patterns from HELLA beacons and visual warning systems in a variety of real-world scenarios.

 $\ensuremath{\mathsf{ELIVER}}$ also provides you with all of the relevant information about performance and technical specifications.



ELIVER

The unique online comparison tool for light distribution.

www.hella.com/eliver



HELLA EMERGENCY LAMPS ARE TESTED TO INTERNATIONAL STANDARDS









Vibration Test

This test simulates the behaviour of the products in harsh off-road conditions and verifies resistance to potholes, washboard road patterns and gravel roads.

A (wide band random vibration) test is used to test the mechanical endurance strength of the test specimen. The vibration frequency range extends from 10 to 1000 Hertz. In addition to vibration testing, products are subjected to a temperature overload of -40°C to $+60^{\circ}\text{C}$.

Ingress Protection (IP ratings)

HELLA Emergency and Signal Warning Lighting contain precision electronic and mechanical components in order to achieve outstanding product performance. In order to protect these components and assure long term reliability HELLA products are designed and tested to meet international standards on ingress protection as per IEC 60529, DIN 40050-9 or ISO 20653.

Dust Test

Entry of dust can affect the optical and mechanical operation of a lamp, potentially compromising its performance and reliability. Accordingly HELLA products are designed and tested to ensure the risk of dust ingress is minimised or eliminated. Dust-resistant products are rated at IP 5(K) X, while dust-proof products are rated at IP 6(K) X.

Water Splash Test

HELLA products that fulfil the water splash test requirement have been subjected to environmental testing designed to simulate operating conditions representing normal weather conditions. When correctly installed heavy rain, direct splashes and water sprays up to 4 bar will have no adverse effects on the long term reliability and performance of the product. This level of protection is provided on HELLA products rated at IP X4K or above.

Temporary Immersion Test

HELLA products that fulfil the temporary immersion test requirement have been subjected to tests designed to simulate operating conditions that involve brief immersions in water such as off-road driving through a stream. This level of protection is provided on HELLA products rated at IP X7.

High-Pressure Cleaner Test

For the ultimate in water ingress protection, HELLA products that fulfil the high-pressure cleaner test requirement are able to withstand water and steam jets of up to 80°C and 100 bar that may be encountered during commercial and industrial cleaning processes. This level of protection is provided on HELLA products rated at IP X9K.



First Digit Below: Table 1

Protection against solid foreign objects and access to hazardous parts.

Second Digit Right: Table 2

Protection against liquids.

FIRST DIGIT

- 0 Non-protected.
- 1 Protected against solid foreign objects of 50mm diameter and greater.
- 2 Protected against solid foreign objects of 12.5mm diameter and greater.
- 3 Protected against solid foreign objects of 2.5mm diameter and greater.
- 4 Protected against solid foreign objects of 1.0mm diameter and greater.
- 5 Dust-protected.
- 5K Dust-protected.
- 6 Dust-sealed
- 6K Dust-sealed

SECOND DIGIT

- 0 Non-protected.
- 1 Protected against drops of water falling vertically.
- Protected against drops of water falling vertically at up to 15° from the vertical.
- $_3$ Protected against spraying water falling vertically at up to 60° from the vertical.
- 4 Protected against splashing water from all directions.
- 4K With higher pressure.
- 5 Protected against jet of water from all directions.
- 6 Protected against powerful water jets.
- 6K With higher pressure, specific for road vehicles.
- 7 Protected against the effects of immersion.
- 8 Protected against prolonged effects of immersion under pressure to specified depth.
- 9K Protected against high-pressure cleaner, specific for road vehicles.

What beacon is best for which application?

There is no one beacon specific to certain applications as they are all designed to be used in multiple situations. There are a few factors to consider whenever selecting a beacon. The selection can be narrowed with the help of certain criteria. To find the right beacon for the right application, you should ask yourself the following questions before purchasing.

Where or how intensively / frequently will the beacon be used?

How frequent the beacon will be used and in which environment needs to be taken into account. If the beacon is used very frequently the advantages of LED technology such as design life, low maintenance, low power consumption will be more important than if its use is low.

What kind of warning effects do I want to achieve?

In highly populated areas you would want to draw attention of approaching vehicles to the situation/incident from a reasonable distance. In this case, we recommend using a beacon with a high warning effect. However, if the beacon isn't used frequently and in areas that don't need a high warning effect, a halogen beacon is completely sufficient.

How high is the vibration stress for beacons?

Take into account whether the vehicle will absorb some of the vibration also what kind of environment the beacon will be used in e.g. the roads it will be used on (are they smooth or rough). If needed look at beacons with a mounting attachment that will absorb some of the stress, also look at the design and materials as they may help to reduce vibration stress.

How do I want to attach the beacon to the vehicle?

The type of vehicle and position on the vehicle the beacon will be mounted on will determine which attachment will work best. There are three different mounting options to choose from – fixed, flexible pipe socket and magnetic. The different attachment variants are legally stipulated in DIN 14620.

CAUTION: MOUNTING OF MAGNETIC BASE REVOLVING LAMPS

Due to HELLA being unable to control the condition of the mounting surface or the potential forces that may occur during deceleration, fitment of warning lamps with a magnetic base cannot be recommended for use on moving vehicles.









K-LED 2 Beacon - Fixed Mount

K-LED low profile beacons are the ideal choice wherever beacons risk interference with radio communications. Featuring 20 high power LEDs providing high light output for best visibility. An automatic day/night sensor adjusts brightness to avoid glare discomfort at night. 14 different flashing and 2 rotating patterns.





P/N 1616








Part Number	1614		AMBER
	1616		RED
Mounting	Fixed mounting on horizontal surfaces		
Voltage	Multivolt™ for optimum brightness at input voltages	from 10 to 32	volts
Power Consumption	30W max.		
Protection	Reverse polarity and Transient Spike Circuit protection IP 67 (Protection against dust and temporary water immersion)		
Flash Rate	Simulated rotation 120rpm (2.0 Hz)		
Cable Length	Pre-wired with 150mm cable		
RF Suppression	CISPR25 Class 5		
Compliance	ECE R65/00 TA2	J 845 Class 1	&

K-LED 2 Beacon

- Magnetic Mount

K-LED low profile beacons are the ideal choice wherever beacons risk interference with radio communications. Featuring 20 high power LEDs providing high light output for best visibility. An automatic day/night sensor adjusts brightness to avoid glare discomfort at night. 14 different flashing and 2 rotating patterns.










Part Number	1614-MAG		AMBER
Mounting	Magnetic mounting on horizontal surfaces		
Voltage	Multivolt™ for optimum brightness at input voltages from 1	10 to 32	volts
Power Consumption	30W max.		
Protection	Reverse polarity and Transient Spike Circuit protection IP 67 (Protection against dust and temporary water immer	rsion)	
Flash Rate	Simulated rotation 120rpm (2.0 Hz)		
Cable Length	Spiral cable extends to 2.5m		
RF Suppression	CISPR25 Class 5		
Compliance	ECE R65/00 TA2	Class 1	&


Caution: Mounting of Magnetic Base Revolving Lamps

Due to HELLA being unable to control the condition of the mounting surface or the potential forces that may occur during deceleration, fitment of warning lamps with a magnetic base cannot be recommended for use on moving vehicles.

EMERGENCY LIGHTING AND SIGNAL WARNING LAMPS








Part Number	2RL 012 983-001		AMBER
Mounting	Fixed mounting on horizontal surfaces		
Voltage	Multivolt™ for optimum brightness at input voltages from 1	0 to 30 vo	lts
Power Consumption	20W max.		
Protection	Reverse polarity and Transient Spike Circuit protection IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)		
Flash Rate	Simulated rotation 120rpm (2.0 Hz)		
Cable Length	Pre-wired with 1.5m cable		
RF Suppression	CISPR25 Class 5		
Compliance	ECE R65/00 TA1		&

LED UltraRAY 2.0 Rotating Beacon

Heavy duty LED beacon includes a light sensor for day/night operation. Excellent light output and rugged design makes for one of the toughest LED beacons on the market. Suitable for harsh and demanding conditions, such as mining.









Part Number	2XD 012 985-001	AMBER
Mounting	Fixed mounting on horizontal surfaces	
Voltage	Multivolt™ for optimum brightness at input voltages from 10 to 30	volts
Power Consumption	Up to 32W	
Protection	Reverse polarity and Transient Spike Circuit protection IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cle	aning)
Flash Rate	16 selectable flash pattern including rotating	
Cable Length	Pre-wired with 1.5m cable	
RF Suppression	CISPR25 Class 5	
Compliance	ECE R65/00 TA1 ECE R10 SAE J845 Class 1	&

LED DuraRAY 4.0 Rotating/ Flashing Beacon

Heavy duty LED beacon with the choice of 16 rotating or flashing patterns, and also includes a light sensor for day/night operation. Excellent light output and rugged design makes for one of the toughest LED beacons on the market. Suitable for harsh and demanding conditions, such as mining.



SELECTABLE PATTERN	FLASHING SEQUENCE (FS)
1	Single flash 2 Hz
2	Double flash 2 Hz (ECE)
3	Triple flash 2 Hz
4	Rotation 2 Hz 120rpm (ECE)
5	Single flash 2 Hz (250ms offset to FS1)
6	Double flash 2 Hz (250ms offset to FS2)
7	Triple flash 2 Hz (250ms offset to FS3)
8	Single flash 1.4 Hz SAE

SELECTABLE PATTERN	FLASHING SEQUENCE (FS)
9	Double flash 1.4 Hz SAE
10	Triple flash 1.4 Hz SAE
11	Quad flash 1.45 Hz SAE
12	Rotating signal 1.4 Hz 84rpm SAE
13	Single flash 1.4 Hz SAE (250ms offset to FS8)
14	Double flash 1.4 Hz SAE (250ms offset to FS9)
15	Triple flash 1.4 Hz SAE (250ms offset to FS10)
16	Quad flash 1.4 Hz SAE (250ms offset to FS11)

RotaLED Beacons


RotaLED Beacon, with the latest LED technology provides an optimum signal image with low power consumption featuring rotating LED light function. The combination of thermal management and optics in one module makes a remarkably compact design possible. Impact and dirt resistant Polycarbonate lens.





P/N 1613







Part Number	1611 (Fixed Mount)	AMBER	
rait Nullibei	1613 (Magnetic Mount)	AMBER	
Mounting	Fixed mount: Upright, fixed mounting on horizontal surfaces. Magnetic mount: Magnetic mounting on horizontal surfaces.		
Voltage	Multivolt™ for optimum brightness at input voltages from 10 to 3	32 volts	
Power Consumption	10W		
Protection	IP 5KX (Protection against dust) IP X4K (Protection against splashing water from all directions. With higher pressure) IP X9K (Protection against high-pressure cleaner, specific for road vehicles)		
Flash Rate	Simulated rotation 120-133rpm (2.0-2.2 Hz)		
Cable Length	P/N 1611: Pre-wired with 120mm cable P/N 1613: Spiral cab	le extends to 2.5m	
RF Suppression	CISPR25 Class 5		
Compliance	ECE R65/00 TA1	&	


Caution: Mounting of Magnetic Base Revolving Lamps

Due to HELLA being unable to control the condition of the mounting surface or the potential forces that may occur during deceleration, fitment of warning lamps with a magnetic base cannot be recommended for use on moving vehicles.

RotaLED Beacon - Pipe Mount

RotaLED Beacon, with the latest LED technology provides an optimum signal image with low power consumption featuring rotating LED light function. The combination of thermal management and optics in one module makes a remarkably compact design possible. Impact and dirt resistant Polycarbonate lens.










Part Number	1612		AMBER
Mounting		g. Tubular base incorporates connection plug. Must vith connecting piece P/N 8007, or other HELLA 2-p	
Voltage	Multivolt [™] for	optimum brightness at input voltages from 10 to 3	32 volts
Power Consumption	10W		
Protection	Same as P/N	N 1611 above	
Flash Rate	Simulated ro	tation 120-133rpm (2.0-2.2 Hz)	
Cable Length	Pre-wired with 120mm cable		
Accessories	8007 8007FM 8007RA 8008	2 Pole beacon mount - Pipe 2 Pole beacon mount - Flat mount 2 Pole beacon mount - Flat angle mount 2 Pole beacon mount - Threaded mount	
RF Suppression	CISPR25 Clas	ss 5	
Compliance	ECE R65/00	TA1 ECE R10	<u> </u>



P/N 8007 P/N 8007FM P/N 8007RA P/N 8008





Part Number	2XD 013 979-001	AMBER	
Mounting	Fixed mounting on horizontal surfaces.		
Voltage	Multivolt™ for optimum brightness at input voltages from 10 to 30 volts		
Power Consumption	10W		
Protection	Reverse polarity and transient spike circuit protection IP 67 (Protection against dust and temporary water immersion) IP X9K (Protection against high-pressure cleaner, specific for road vehicles)		
Flash Rate	124 +/- 10 per minute, double flash		
Cable Length	Pre-wired with 150mm cable		
RF Suppression	CISPR25 Class 5		
Compliance	ECE R65/00 TA1 ECE R10 SAE J845 Class 2	<u>&</u>	

RotaLED Compact Beacon

- Fixed Mount

A high performance LED beacon offering a double flash signal and 360° warning effect which provides ultimate attention in many applications. The impact-resistant dome and no moving parts provide maximum reliability.









Part Number	2XD 013 979-011	AMBER	
Mounting	Tubular base incorporates connection plug. Must be used in conjunction with P/N 8007: 2 pole beacon mount - pipe, or other HELLA 2-pole beacon mounts.		
Voltage	Multivolt™ for optimum brightness at input voltages from 10 to 3	30 volts.	
Power Consumption	10W		
Protection	Same as P/N 1611 above		
Flash Rate	124 +/- 10 per minute, double flash.		
Cable Length	Pre-wired with 150mm cable		
Accessories	8007 2 Pole beacon mount - Pipe 8007FM 2 Pole beacon mount - Flat mount 8007RA 2 Pole beacon mount - Flat angle mount 8008 2 Pole beacon mount - Threaded mount		
RF Suppression	CISPR25 Class 5		
Compliance	ECE R65/00 TA1	<u> </u>	

P/N 8007 P/N 8007FM P/N 8007RA P/N 8008

RotaLED Compact Beacon - Pipe Mount

A high performance LED beacon offering a double flash signal and 360° warning effect which provides ultimate attention in many applications. The impact-resistant dome and no moving parts provide maximum reliability. The flexible pipe mount softens impacts and minimises the risk of damage thanks to its special design.






Extremely flexible pipe mount rubber base mechanism

KL7000LED Beacon - Fixed Mount

KL7000LED Beacon, with the latest LED technology provides an optimum signal image with low power consumption featuring rotating LED light function. The combination of thermal management and optics in one module makes a remarkably compact design possible. Impact and dirt resistant PMMA lens.








Part Number	1608	AMBER
Mounting	Upright, fixed mounting on horizontal surfaces.	
Voltage	Multivolt™ for optimum brightness at input voltages from 10 to	32 volts.
Power Consumption	10W	
Protection	IP 5KX (Protection against dust) IP X4K (Protection against splashing water from all directions. WI IP X9K (Protection against high-pressure cleaner, specific for ro	J 1
Flash Rate	Simulated rotation 120-133rpm (2.0-2.2 Hz)	
Cable Length	Pre-wired with 120mm cable	
RF Suppression	CISPR25 Class 5	_
Compliance	ECE R65/00 TA1	<u>&</u>

KL7000LED Beacon

- Magnetic Mount

KL7000LED Beacon, with the latest LED technology provides an optimum signal image with low power consumption featuring rotating LED light function. The combination of thermal management and optics in one module makes a remarkably compact design possible. Impact and dirt resistant PMMA lens.








Part Number	1610	AMBER
Mounting	Magnetic mounting on horizontal surfaces.	
Voltage	Multivolt™ for optimum brightness at input voltages from 10 to 3	32 volts.
Power Consumption	10W	
Protection	IP 5KX (Protection against dust) IP X4K (Protection against splashing water from all directions. Wi IP X9K (Protection against high-pressure cleaner, specific for roo	J 1
Flash Rate	Simulated rotation 120-133rpm (2.0-2.2 Hz)	
Cable Length	Spiral cable extends to 2.5m	
RF Suppression	CISPR25 Class 5	
Compliance	ECE R65/00 TA1	&

Caution: Mounting of Magnetic Base Revolving Lamps

Due to HELLA being unable to control the condition of the mounting surface or the potential forces that may occur during deceleration, fitment of warning lamps with a magnetic base cannot be recommended for use on moving vehicles.





Part Number	12 VOLT	24 VOLT	
	454201A	454201A-24V	AMBER
	454201R	454201R-24V	RED
	454201B		BLUE
Part Number	454205A (Economy Version - 12 Volt)		AMBER
Flash Rate	20 user selectable flash patterns.		
Current Draw	12V - 5.0A max. 24V - 3.0A max.		
Compliance	SAE J845 Class 1		

LED Highlighter™ Mini Light Bars

The Highlighter™ LED Mini Light Bar combines the high performance ROC™ (Reliable On-board Circuitry) with the high efficiency Solaris™ reflector design. The innovative reflector design offers uniform 360° light distribution, which means no dark spots or shadows. Highlighter™ units (except economy P/N 454205A) can be wired together, or to other devices for a completely synchronized warning system.





P/N 454201R

P/N 454201B

Part Number	454201AMAG	AMBER
Flash Rate	20 user selectable flash patterns.	
Current Draw	12V - 5.0A max.	
Compliance	SAE J845 Class 1	
HELLA does not recommend the magnetic base version for use on a moving vehicle (see page 188).		







Magnet view

LED Highlighter™ Mini Light Bars - Magnetic Mount 12 Volt

Highlighter™ magnet mount model includes a cigarette lighter plug and built-in ON-OFF switch that makes them simple to install and just as simple to operate. Incorporated into the top of the LED dome is an innovative magnet select feature that enables users to quickly and easily select from more than 20 flash patterns using a simple magnet.



Part Number	LENSES (SINGLE)
	9.454201.05 (Clear)

Part Number	MOUNTING KITS/BRACKETS		
	454217 (Mount Riser 52mm)	454218 (Mount Flat 12mm)	
	452341 (Magnetic Mount Kit)	9.454201.07 (Highlighter base)	



P/N 452341

P/N 9.454201.07


LED Highlighter™ Mini Light Bars Accessories



LED 83mm Round Multi-flash Signal Lamp

83mm diameter round LED signal lamps with single bolt mount for emergency vehicles. The HELLA multi-flash range of warning lamps have 10 programmable flash modes and can be synchronised to flash alternately or in unison.










P/N 95901145 P/N 95901160

P/N 95901165









	95901140	RED
	95901145	AMBER
Part Number	95901160	BLUE
	95901165	GREEN
Mounting	Single bolt 1/4" stainless UNC thread. Nut and washer supplied.	
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.	
Power Consumption	6W continuous (less in flashing modes).	
Protection	Reverse polarity and voltage spike protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)	
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.	
Compliance	ECE R10	
See page 84 for mounting accessories.		

LED 360° Multi-flash Signal Lamp

Multi-purpose LED 360° warning lamp with clear Grilamid® lens, available in four signal colours and white. The HELLA multi-flash range of warning lamps have 10 programmable flash modes and can be synchronised to flash alternately or in unison. Optic appears clear until illuminated.







P/N 98091120

P/N 98091140





P/N 98091160 P/N 98091170













	98091100	WHITE
	98091120	GREEN
Part Number	98091140	RED
	98091160	AMBER
	98091170	BLUE
Mounting	Upright mounting with three point mount.	
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.	
Power Consumption	Less than 5W (less in flashing modes).	
Protection	Reverse polarity and voltage spike protection. IP 67 (Protection against dust and temporary water immersion)	
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.	
Lens Material	High impact and chemical resistant Grilamid® lens	
Compliance	ECE R10	
Lamps shown illuminated (left).		

EMERGENCY LIGHTING AND SIGNAL WARNING LAMPS





	95903701	RED
	95903711	AMBER
Part Number	95903761	BLUE
	95903781	GREEN
	95903791	WHITE
Mounting	Two hole surface mount with mounting bushes supplied.	
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.	
Power Consumption	9W continuous (less in flashing modes).	
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS) IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)	
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.	
Compliance	SAE J845 Class 1 (Red and amber versions)	
See pages 80 for DuraLED® accessories.		

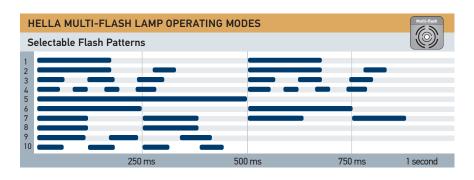



Flashing Options		
Steady state	Lamp operates as a continuous ON signal	
Independent flash	Lamp operates from an external flashing system	
Flash state	Lamp operates in the flash mode preselected by the user	
Blitz state	Lamp operates in a burst of quad flashes (pattern 4)	
The blitz mode overrides the other operating modes and is triggered by switching the blue cable to negative (-).		

DuraLED® Multi-flash Signal Warning Lamp

Multivolt™ warning lamps for emergency vehicles. The HELLA multi-flash range of warning lamps have 10 programmable flash modes and can be synchronised to flash alternately or in unison.








P/N 95903781 P/N 95903791

DuraLED® Combi Red/Green Signal Warning Lamp

This DuraLED® red/green signal warning lamp is designed as a stop/go lamp to signal when it is safe or dangerous to approach and/or work on a vehicle. The red signal has two outputs, either 1.5W or 6W, allowing the lamp to function even for long periods (e.g. overnight) without draining batteries. It is completely sealed, UV, impact and shock resistant, ensuring an ultra-long service life.









Part Number	2XA 959 050-321	RED/GREEN	
Mounting	Surface mount with mounting bushes supplied.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	Red: 1.5W/6W Green: 3W		
Protection	Reverse polarity and transient spike circuit protection. IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)		
Cable Length	Pre-wired with 6.0m of sheathed multi-core cable.		
Lens Material	High impact and chemical resistant Grilamid® lens		
Compliance	<u> </u>		
Note: Light output suitability is at the discretion of the installer.			

COMBI LAMP FUNCT	IONS	
		Smini 6
Red/High	Red/Low	Green/Go

EuroLED° Signal Warning Lamp - 24 Volt

Low profile signal warning LED lamp featuring Ultra Wide Visibility Optics for significantly improved side visibility.





P/N 95902181









Part Number	95902081	RED
Part Number	95902181	AMBER
Mounting	Two hole surface mount with mounting bushes supplied.	
Voltage	20-28V	
Power Consumption	5W	
Protection	Reverse polarity and Transient Spike Circuit protection. IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)	
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.	
Compliance	ECE R10	
This lamp requires an external flasher unit such as P/N 3040. See page 83 for EuroLED® accessories.		

196

MULTI VOLT








LED 360° Warning Lamp

Multi-purpose LED 360° warning lamp with Grilamid® lens available in four signal colours and white. Optics appear clear until illuminated.



	98091004	WHITE	
	98091024	GREEN	
Part Number	98091044	RED	
	98091064	AMBER	
	98091074	BLUE	
Mounting	Upright mounting with three point mount.		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.		
Power Consumption	5W		
Protection	Reverse polarity and voltage spike protection. IP 67 (Protection against dust and temporary water immersion)		
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.		
Lens Material	High impact and chemical resistant Grilamid® lens		
Compliance	ECE R10		
See page 194 for multi-flash versions. This lamp requires an external flasher unit such as P/N 3040.			





Part Number	95913610	AMBER
Mounting	Dash mount.	
Voltage	12V	
Power Consumption	3W	
Cable Length	Pre-wired with 2.5m of multi-core cable.	
This lamp requires an external flasher unit such as P/N 3040.		

LED Dash Mount Signal Lamp - 12 Volt

Inconspicuous LED warning lamp with an unobtrusive and aesthetic design allowing for permanent fitment, making it an ideal supplement to revolving or strobe lamps attached to the vehicle roof. Optic appears clear until illuminated in amber signal colour.



Revolving Beacon KL 700

KL 700 high performance revolving beacon. The halogen bulb is replaced from the rear of the reflector eliminating the need to touch the highly polished reflector surface. Twin belt drive ensures a smooth and quiet operation.





P/N 1653





	12 VOLT		24 VOLT	
D . N . I	1724		1722	AMBER
Part Number			1721	RED
			1720	BLUE
Power Consumption	12V - 55W 24V - 70W			
Rotation	160rpm			
RF Suppression	VDE 0879, Class 3, F	FM 5.		
Bulbs to Suit	12V 24V	C1255 C2470		
Protection			t and water splashing with increas pressure/steam jet cleaning)	sed pressure)
Spare Parts	9.1718.01 9.1719.01 9.1724.01 9.1723.01	Blue lens Red lens		
Compliance	ECE R65/00			
LICI I A dose not recens			use an a maying vahida (see page	100\

HELLA does not recommend the magnetic base version for use on a moving vehicle (see page 188). See page 203 for spare part images.

Revolving Beacon KL 7000

KL 7000 high performance revolving beacon with light values well above the minimum requirements. All KL 7000 beacons can be

operated on 12 or 24V by changing the bulb.


The halogen bulb is replaced from the rear of

the reflector eliminating the need to touch the


highly polished reflector surface. A twin belt

drive ensures a smooth and quiet operation.


EMERGENCY LIGHTING AND SIGNAL WARNING LAMPS







	P Ø155 —
1729	P/N 17





ulb Included	Bulb Included
WC-1-	~ /. W
BULBING	BUILB INC

BULB

	12/24 VOLT		
Part Number	1729 (Magnet	ic mount)	AMBER
	1735 (Flexiba	se mount)	AMBER
Current Draw	12V 24V	5.5A 3.5A	
Power Consumption	12V - 55W 24V - 70W		
Rotation	160rpm		
RF Suppression	Conducted Class	s 5 (CISPR25).	
Protection		tion against dust and water splashing with increas on against high-pressure/steam jet cleaning)	sed pressure)
Bulbs to Suit	12V 24V	C1255 C2470	
Spare Parts	9.1726.01 9.1727.01 9.1728.01 9.1737.91 8007 8007FM 8007RA 8008	 Blue lens Red lens Amber lens Two drive belts 2 Pole beacon mount - Pipe 2 Pole beacon mount - Flat mount 2 Pole beacon mount - Flat angle mount 2 Pole beacon mount - Threaded mount 	
Compliance	ECE R65/00	el 1740	

HELLA does not recommend the magnetic base version for use on a moving vehicle (see page 188). See page 203 for spare part images.



P/N 1726





P/N 1729 P/N 1735



Rotaflex Revolving Beacon

- Amber

Rotaflex revolving beacon with polycarbonate lens and flexible rubber base.






P/N 8007 P/N 8007FM





P/N 8007RA

P/N 8008







Part Number	1730		12 VOLT
Part Number	1731		24 VOLT
Mounting	Tubular base incorporates connection plug. Must be used in conjunction with connecting piece P/N 8007, 8007FM, 8007RA or 8008.		
Power Consumption	12V - 55W 24V - 70W		
Rotation	160rpm		
RF Suppression	Conducted Class 5	(CISPR 25).	
Bulbs to Suit	12V 24V	C1255 C2470	
Protection	IP 5K4K (Protection against dust and water splashing with increased pressure) IP X9K (Protection against high-pressure/steam jet cleaning)		
Spare Parts	9.1730.01 8007 8007FM 8007RA 8008	Amber polycarbonate lens 2 Pole beacon mount - Pipe 2 Pole beacon mount - Flat mount 2 Pole beacon mount - Flat angle mount 2 Pole beacon mount - Threaded mount	
Compliance	ECE R65/00	e1 2181	

Rotafix Revolving Beacon - Amber

Rotafix revolving beacon with polycarbonate lens and rubber base.





P/N 1733





	12 VOLT	24 VOLT	
Part Number	1732	1732-24V	
	1733	1733-24V	MAGNETIC MOUNT
Mounting	Fixed base or with magnetic at	tachment.	
Power Consumption	12V - 55W 24V - 70W		
Rotation	160 +/- 30rpm		
RF Suppression	Conducted Class 5 (CISPR 25).		
Bulbs to Suit	12V C1255 24V C2470		
Protection	IP 5K4K (Protection against dus IP X9K (Protection against high	st and water splashing with incre -pressure/steam jet cleaning)	ased pressure)
Spare Parts	9.1730.01 • Amber pol	ycarbonate lens	
Compliance	ECE R65/00 e1 2181		
	ECE R65/00 e1 2181 mend the magnetic base version fo	r use on a moving vehicle (see pag	e 188).







	1656		RED	
Part Number	1657		AMBER	
	1663		GREEN	
Voltage	Multivolt™ 12-72V			
Current Draw	0.24 - 0.04A	0.24 - 0.04A		
Power Consumption	2 Watts, 2 Joules			
Flash Rate	60 +/- 10 per minute			
Protection	IP 55 (Protection against dust and water jets)			
Bulb to Suit	XN000	XN000 Strobe tube (see page 373)		
Spare Parts	9.1656.01 9.1657.01	Magnetic mounting kit Blue lens Red lens Amber lens Green lens		
Compliance	SAE J845 Class 3			

HELLA does not recommend the magnetic base version for use on a moving vehicle (see page 188).

Firebolt Plus Strobe Beacon -12-72 Volts

The Firebolt Plus strobe features a 2 joule power supply that works from 12 to 72V. Modular construction incorporates a powerful replaceable strobe tube and vibration resistant circuit board. The unit also features a tough impact-resistant polycarbonate lens and base. Applications include fork-lift, electric vehicles, industrial trucks and equipment. Supplied with enclosed base and all necessary mounting hardware (mounts with three bolts).





P/N XN000

Magnetic Mounting Kit - Firebolt Plus

Part Number	8027	KIT
Description	Complete Magnetic Mounting Kit to allow quick and secure attar roof. Kit includes magnetic base (82mm dia.), spiral cable (exter 2-pole plug for the cigarette lighter socket.	
Height	11mm	
Suits	All Firebolt Plus Series Strobe Lamps.	



Caution: Mounting of Magnetic Base Revolving Lamps

Due to HELLA being unable to control the condition of the mounting surface or the potential forces that may occur during acceleration and deceleration, fitment of warning lamps with a magnetic base cannot be recommended for use on moving vehicles.

Pipe Mount for Beacons

Pipe mount system. Connecting pieces suitable for applications that require removable Beacons or Work lamps.



2 POLE BEACON MOUNT - PIPE

Part Number

8007



2 POLE BEACON MOUNT - FLAT MOUNT

Part Number

8007FM



2 POLE BEACON MOUNT - FLAT ANGLE MOUNT

Part Number

8007RA



POLE BEACON MOUNT - THREADED

Part Number

8008



PIPE MOUNT FOR BEACONS - Ø165MM

Part Number

8HG 005 436-011

Suits P/Ns 1614, 1724

KL 700 AND KL 710 ACCESSORIES		
Part Number	9.1737.91	TWO DRIVE BELTS
	1653	MAGNETIC MOUNTING KIT





KL JUNIOR PLUS ACCESSORIES		
Part Number	9.1797.91	DRIVE BELT





Contents

Interior/Exterior Lighting

EuroLED® Interior Lamps	210
EuroLED® Down Lights	211-215
CargoLED Series	215
DuraLED® White	216-219
LED Strip	220-222
LED Courtesy	224-227
DuraLED® Work Lamps	228-229
Map Reading Lamps	230
I FD Wall Mount Lamp	231

LED LIGHTING TECHNOLOGY - ENERGY EFFICIENT ILLUMINATION

HELLA LED based luminaires are sophisticated opto-electronic devices designed to enhance an interior by adding functionality, increased energy efficiency and offer long term durability.

LED based lighting has many advantages over traditional incandescent bulbs including significantly reduced power consumption, increased reliability, a reduction in radiated heat, longer life and less maintenance.

But it's important to know not all LEDs are created equal

When comparing one LED product to another it is important to not just look at the initial purchase price but consider the full life time cost and what attributes combine to make a quality LED product. Most owners will agree that purchasing products that do not fit the purpose, or that need to be replaced, is a waste of time and money.

To design efficient and reliable LED luminaires, many factors need to be considered. Light output, beam pattern, material choices and lamp protection can all make a significant difference in the performance and life of a lamp. It is also important to consider the application where the lamp is likely to be used and what sort of illumination

you desire. Corrosive moisture, heat, vibration and voltage fluctuations can all affect an LED device so these factors need to be managed.

HELLA LED lamps use the latest LED technology, quality components and materials to provide the best efficacy (lumens per watt), consistent colour and light output with long term reliability, even in the most demanding conditions.

With so many LED options available it is important to understand the differences and what aspects to consider when comparing LED products.

- → Actual Light Output
- → Colour Temperature and Colour Rendering Index (CRI)
- → Thermal Management and Sealing for reliability
- → Electrical Interference and Flicker





Light Output and Beam Patterns

The term 'Lumen' is commonly used to describe the light output of LED lights. Over the last decade Lumen ratings have increased significantly as the technology has developed. However this can be confusing as many companies choose to list 'Raw' lumen figures rather than the more realistic 'Effective' lumens.


Raw Lumens are a measure of the theoretical output of a light and is calculated by multiplying the theoretical rated output of the LEDs by the number of LEDs in the lamp.

Example: 8 LEDs rated at 100 Lumens per watt 8 x 100 = 800 Raw Lumens


Factors such as the power used to drive the lamp, thermal losses and optical losses all contribute to a possible 20-50% decrease of the light lumens emitted by the LED.

Effective Lumens is a measure of the actual output from a light after taking into consideration real world losses (e.g. thermal, optical, and assembly). Therefore it is a much more accurate representation of the light being produced.

Example: Raw lumens may = 800 but when light decreases due to thermal, optical and assembly losses this can result in up to 50% decrease in actual output and usable light. 800 raw lumens minus 50% losses = 400 Effective Lumens.





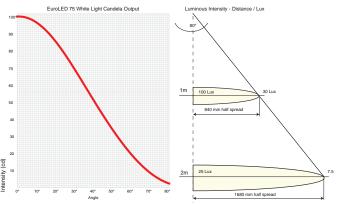

Lux and candela diagrams to illustrate accurate light output and beam angles.

Thermal Losses can equate for 20-30% decrease in light output

LEDs produce a tremendous amount of power in a relatively small area and some of this power is converted to heat. However unlike incandescent lamps LEDs do not like heat. As the LEDs increase in temperature the actual light output diminishes.

LED manufacturers typically measure the Raw Lumen output produced by their LEDs after 25 milliseconds (ms). That is equivalent to a flash bulb, giving a Lumen number that is the absolute maximum value. However real world applications require the lamp to run much longer meaning potential losses of up to 30%.

All HELLA LED lamps are designed to dissipate heat away from LEDs through effective thermal management. HELLA also uses sophisticated photometric equipment to measure the lamps and only after 30 minutes of operation so the LED temperature has stabilised, ensuring you always get a more accurate 'effective' lumens measure.

Optical & Assembly losses can equate to 10-20% decrease in light

These losses are present whether the light source is an LED or a bulb. As light travels through an object (such as a lens), it loses intensity depending on the clarity of the material. This is due to inherent losses internal to the material and also to losses at the boundary of the part as the light travels from air, through the lens, and back to air.

There are also losses associated with assembly and manufacturing variation. The LED output varies as the assembly tolerances may diminish the overall performance from theoretical LED maximums.

Simply adding the expected values of the LED light sources together will never result in a lamp that shines that amount of light on the ground.

To accurately measure light performance and beam angles compare Lux Charts

Lumens are not the only measurement that is important – Another, more useful measurement of actual light output is Lux. Lux and candela ratings refer to the actual light intensity from the lamp at given distances and direction. This way you know what light levels to expect when designing your lighting layout.

Quality lighting manufacturers using state of the art photometric equipment, are able to provide accurate lux or candela charts so consumers get a fair representation of the expected Luminaire performance.

Another aspect to consider when reviewing luminaire performance is the evenness of illumination. Expressed as 'beam angle' this gives the user an idea of how spread or narrow the luminaire will be. Down lights will often have a wide spread optic to fill a room. By overlapping the wide spread beams from several luminaires, shadows are reduced. Other lamps like spotlights or courtesy lighting may be designed to focus or direct the light in a certain direction to achieve a specific effect. Make sure you select a luminaire with a lens and optical design to suit your application.

COLOUR TEMPERATURE AND COLOUR RENDERING INDEX (CRI)

When white LED lighting first became available it gained a reputation for appearing 'cold' and 'blue' due to the phosphorous coating technology. However today's devices can rival traditional incandescent light sources for colour and ambience.

LED colours set the tone and feel so choosing Luminaires that complement your interior or exterior is important.

Colour temperature is measured in Kelvin and is a sliding scale of light that appears bluer or more orange at each end. HELLA describes higher colour temperatures (5000K) as 'cool white' and lower colour temperatures (3000K) as 'warm white'.

Cool white is recommended for visual tasks, work areas and exterior lighting, as it is known to reduce fatigue and increase alertness over long periods of time.

Warm white is suggested for interior spaces as it adds life and vibrancy to people and objects. It is considered more flattering to skin tones or fabrics and makes food look fresh and attractive.

1850K Candle	
2800K Halogen Bulb (Incandescent Lam	p)
3000K~ Warm White LED	
5000K~ Cool White LED	
5700K~ Daylight	

When selecting LED interior lighting look for lamps with a high colour rendering index (CRI)

The higher the CRI rating the better and truer colour reproduction you will get of various objects. For example sunlight has the highest CRI rating of 100. LED lamps with a CRI rating of 80 or higher will reproduce the colour scheme of the interior with good accuracy.

All HELLA LED chips are selected from tight specification bins to ensure that lamps are the same brightness and colour temperature grade. This ensures a room full of lights will all have the same appearance e.g. colour temperature and intensity.

Colour Rendering Index - CRI

CRI: 50-70 Fair






CRI ratings >80 produce natural colours

Thermal Management and Sealing for Reliability

Although LED lamps run much cooler than incandescent lamps, LEDs and the electronics inside a lamp do heat up and if not cooled effectively can affect the light performance and the expected life span of the lamp. It is important lamp housings are designed to efficiently transport this heat away from the LED itself.



HELLA thermally conductive plastics are 30 times more thermally conductive than conventional plastic.

LEDs that overheat, meaning the junction temperature of the LED rises above a set threshold, will permanently degrade, significantly reducing their output. A very hot running Luminaire can also cause issues when interacting with the surrounding materials.

HELLA lamps are designed within stringent heat thresholds that ensures lamps will not overheat, meaning longer life.

Reliable Design and Quality Construction

Manufacturers of raw LEDs quote the lifetime of the LED chip as '50,000 hours'. This period of time is then often used to promote the expected life of the complete lamp. However to achieve this life expectancy, LEDs require precise current control, overvoltage/spike protection and temperature control to avoid any premature failure. For LED luminaire designers and manufacturers, in-depth design and engineering is required to produce such durable products. Sadly, most do not make the cut, despite their claims.

LED reliability is compromised if dust, moisture and other contaminants find their way inside the lamp. So the most effective way to protect the lamp is by completely sealing it from the elements. Sealed housings and cable entries, along with components designed to withstand shock, vibration and impacts all contribute towards exceptional life expectancy.

All HELLA LED lamps are at least IP 67 rated, meaning they can be washed and cleaned on the exterior of vehicles. If used for interior applications moisture and condensation from bathrooms and kitchens will not affect the lamp.

Electrical Interference and Flicker

Some LED products can demonstrate a flickering effect, usually when dimmed or if the lamps use low frequency components or dimmers. Not only is a flicker annoying and uncomfortable, it can also be harmful to those susceptible.

A recent US Department of Energy (DOE) report warns of poorly designed LED luminaires, associating low frequency 'Flicker' with the possibility to trigger epileptic attacks in parts of the population that are susceptible.

Electromagnetic Compatibility (EMC)

This is another safety concern, especially for emergency and industrial applications. Electromagnetic interference (EMI) can disrupt radio signals especially when in remote locations or areas with low reception. As electronic devices such as LED lamps become more common, so does the risk of unintended EMI that can have adverse effects on sensitive devices such as radios or communication equipment.

All HELLA LED products use quality components to prevent any possible flickering and are tested and certified to international standards for electromagnetic interference.

Examples of different LED manufacturers and methods of sealing lamps.







DIMMABLE LOGOSWHAT DO THEY MEAN?

Logos used throughout the Interior/Exterior section to help quick referencing of important product features are explained below.



Light intensity is reduced as the DC input voltage is reduced below the lamps specified operating voltage.



Light intensity is controlled through the lamp's own internal circuitry via in-built buttons, an external DC power source and a standard switch. See specific lamp instructions for further information.




Light intensity is adjusted between 10-100% using a high frequency PWM (pulse width modulation) DC power supply, with adjustable duty cycle control.




Light intensity can be switched between 100% and a lower level factory pre-set value, usually via an additional cable input supplied with the lamp using a positive feed from the DC power supply within the lamps operating voltage range.

EuroLED® White Touch Lamp

White LED lamp with touch switching and clear lens. Touch the white pad to turn on and the black pad to turn off. Provides ultra long service life and is shock and vibration proof.











P/N 2JA 959 950-561

Part Number	BLACK SHROUD		WHITE SHROUD	
	2JA 959 950-55	1	2JA 959 950-561	WHITE
Mounting	Two hole surface m	Two hole surface mount with mounting bushes supplied.		
Voltage	Multivolt [™] for optim	Multivolt™ for optimum brightness at input voltage from 9 to 33 volts.		
Power Consumption	4W			
Protection	Reverse polarity and transient spike circuit protection. IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)			
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.			
Accessories	8HG 959 952-002 Mounting spacer - Black 8HG 959 952-012 Mounting spacer - White 9.2366.08 EuroLED* Cover - Black 9.2366.11 EuroLED* Cover - White 9.2366.17 Screw boss kit - Pack of 4			
Compliance	C€			<u> </u>


EuroLED® Lamp

White LED lamp with clear lens. Provides ultra long service life and is shock and vibration proof. Includes a black and a white rim. No switching or dimming.





Part Number	95982050		WHITE
Mounting	Two hole surface n	nount with mounting bushes supplied.	
Voltage	Multivolt™ for optim	Multivolt™ for optimum brightness at input voltage from 9 to 33 volts.	
Power Consumption	4W	4W	
Protection	Reverse polarity and transient spike circuit protection. IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)		
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.		
Accessories	8HG 959 952-002 8HG 959 952-012 9.2366.08 9.2366.11 9.2366.17	Mounting spacer - Black Mounting spacer - White EuroLED*Cover - Black EuroLED*Cover - White Screw boss kit - Pack of 4	
Compliance	C€		<u>&</u>

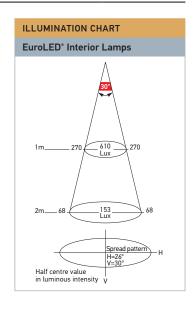

WHITE PLASTIC RIM

2JA 980 631-501

2JA 980 631-601

(€



Part Number

Power Consumption


Mounting

Voltage

Protection

Cable Length

Compliance



WHITE

WARM WHITE

POLISHED STAINLESS STEEL RIM

2JA 980 631-511

2JA 980 631-611

Recess mount, 124mm diameter hole. Surface mount via optional spacer.

Multivolt™ for optimum brightness at input voltage from 9 to 33 volts.

Reverse polarity and transient spike circuit protection.

Pre-wired with 0.5m of sheathed multi-core tinned cable.

Sealed against dust and water ingress.

EuroLED® 150 Down Lights

White or Warm White LED lamp with clear lens. Provides ultra long service life and is shock and vibration proof.







P/N 2JA 980 631-601

Packaging



Part Number	WHITE PLASTIC RIM POLISHED STAINLESS STEEL RIM		
	2JA 980 630-501	2JA 980 630-511	WHITE
	2JA 980 630-601	2JA 980 630-611	WARM WHITE
Mounting	Recess mount, 124mm diameter hole. Surface mount via optional spacer.		
Voltage	Multivolt™ for optimum brightness at input voltage from 9 to 33 volts.		
Power Consumption	4W		
Protection	Reverse polarity and transient spike circuit protection. Sealed against dust and water ingress.		
Cable Length	Pre-wired with 0.5m of sheathed multi-core tinned cable.		
Compliance	CE		<u>&</u>

EuroLED® Touch 150 Down Lights - Single Colour

White or Warm White LED lamp with touch switching and clear lens. Touch the white pad to turn on and the black pad to turn off. Provides ultra long service life and is shock and vibration proof.








P/N 2JA 980 630-601 Packaging




Sealed cable entry

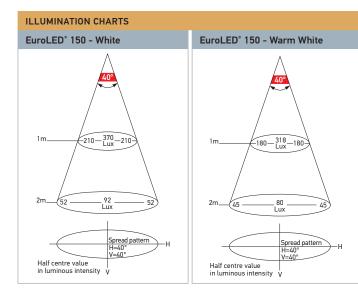

EuroLED® 115 Down Lights - With White Spacer

Round LED high intensity down lights offering class leading efficiency and durability. Supplied with white or polished stainless steel rim to suit.





Dimmable:









P/N 2JA 980 820-101 Sealed cable entry

1- // -1		- 32 -1	
	WHITE PLASTIC RIM POLISHED STAINLESS STEEL RIM		L RIM
Part Number	2JA 980 820-001	2JA 980 820-011	WHITE
	2JA 980 820-101	2JA 980 820-111	WARM WHITE
Mounting	Recess mount, 90mm diameter hole. Surface mount via optional spacer.		
Voltage	Multivolt™ for optimum brightness at input voltage from 10 to 33 volts.		
Power Consumption	4.5W		
Protection	Reverse polarity and transient spike circuit protection. Sealed against dust and water ingress.		
Cable Length	Pre-wired with 0.5m of sheathed multi-core tinned cable.		
Compliance	CE		&

EuroLED® 115 Down Lights - With White Spacer and Switch

Round LED high intensity down lights offering class leading efficiency and durability. Supplied with white or polished stainless steel rim to suit.









P/N 2JA 980 828-111 Packaging

	WHITE PLASTIC RIM POLISHED STAINLESS STEEL RIM		L RIM
Part Number	2JA 980 828-001	2JA 980 828-011	WHITE
	2JA 980 828-101	2JA 980 828-111	WARM WHITE
Mounting	Recess mount, 90mm diameter hole. Surface mount via spacer.		
Voltage	Multivolt™ for optimum brightness at input voltage from 10 to 33 volts.		
Power Consumption	4.5W		
Protection	Reverse polarity and transient spike circuit protection. Sealed against dust and water ingress.		
Cable Length	Pre-wired with 0.5m of sheathed multi-core tinned cable.		
Compliance	C€		<u> </u>



EuroLED® 115 Down Lights with switch, expanded view.

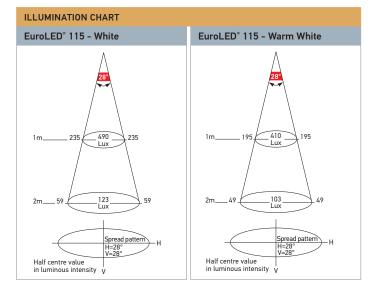





	2JA 958 340-011	WHITE	
Part Number	2JA 958 340-101	WHITE/RED	
	2JA 958 340-111	WHITE/BLUE	
	2JA 958 340-021	WARM WHITE	
	2JA 958 340-121	WARM WHITE/RED	
	2JA 958 340-131	WARM WHITE/BLUE	
Mounting	Recess mount, 76mm diameter hole. Spring clip.		
Voltage	Multivolt™ for optimum brightness at input voltage from 9 to 33 volts.		
Power Consumption	6W		
Protection	IP 6K9K (Protection against dust and high pressure/steam jet cleaning)		
Cable Length	Pre-wired with 120mm of cable.		
Compliance	CE	&	

EuroLED® 95 Gen 2 Round Down Lights - Recess Mount With Spring Clip

The next generation of LED high intensity down lights offers an improved class leading efficiency and durability. The smooth diffused lens creates a comfortable and uniform appearance with over 420 lumens of actual light in a broad and even illumination.






Warm White

Red - Secondary colour




Blue - Secondary colour

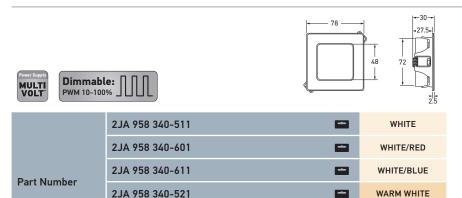

Specifications as per P/N 2JA 958 340-011 above.

2JA 958 340-621

2JA 958 340-631

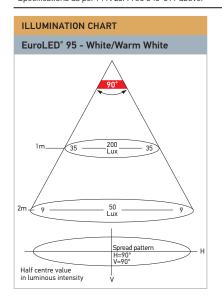

EuroLED® 95 Gen 2 Square Down Lights - Recess Mount With Spring Clip

The next generation of LED high intensity down lights offers an improved class leading efficiency and durability. The smooth diffused lens creates a comfortable and uniform appearance with over 420 lumens of actual light in a broad and even illumination.





Warm White

Red - Secondary colour



Blue - Secondary colour

WARM WHITE/RED

WARM WHITE/BLUE


EuroLED® 95 Down Lights - Recess Mount

Round LED high intensity down lights offering class leading efficiency and durability. Supplied with white or polished stainless steel rim to suit.





P/N 2JA 980 940-111 Packaging





Dimmable: ∏ ∏

	WHITE PLASTIC RIM	POLISHED STAINLESS STEEL RIM	
Part Number	2JA 980 940-001	2JA 980 940-011	WHITE
	2JA 980 940-101	2JA 980 940-111	WARM WHITE
Mounting	Recess mount, 72mm diameter hole. Screw mount.		
Voltage	Multivolt™ for optimum brightness at input voltage from 9 to 33 volts.		
Power Consumption	4W		
Protection	Reverse polarity and transient spike circuit protection. Sealed against dust and water ingress.		
Cable Length	Pre-wired with 0.5m of sheathed multi-core tinned cable.		
Compliance	CE		<u> </u>

EuroLED® 95 Down Lights - Recess Mount With Spring Clip


Round LED high intensity down lights offering class leading efficiency and durability. Supplied with white or polished stainless steel rim to suit.








P/N 2JA 980 940-311 Packaging



	□ \	PWM 10-100% _	VOLT
Part Number	WHITE PLASTIC RIM	POLISHED STAINLESS STEE	L RIM
	2JA 980 940-201	2JA 980 940-211	WHITE
	2JA 980 940-301	2JA 980 940-311	WARM WHITE
Mounting	Recess mount, 72mm diameter hole. Spring clip.		
Voltage	Multivolt [™] for optimum brightness at input voltage from 9 to 33 volts.		
Power Consumption	4W		

Voltage	$\label{eq:multivolt} \text{Multivolt}^{\text{\tiny{M}}} \text{ for optimum brightness at input voltage from 9 to 33 volts.}$
Power Consumption	4W
Protection	Reverse polarity and transient spike circuit protection. Sealed against dust and water ingress.
Cable Length	Pre-wired with 0.5m of sheathed multi-core tinned cable.
Compliance	(€

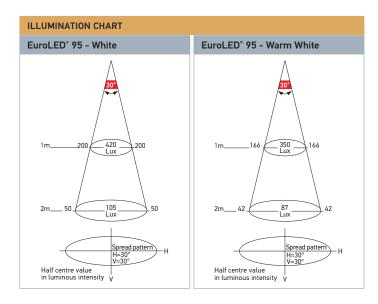









	- 22	7
50		
	13	ו

	12 VOLT DC 24 VOLT DC			
Part Number	2JA 958 110-031	2JA 958 110-131	WHITE	
	2JA 958 109-031	2JA 958 109-131	WARM WHITE	
Mounting	Recess mount, 50mm diamete	r hole.		
Voltage	12V DC or 24V DC	12V DC or 24V DC		
Power Consumption	<3W			
Protection	IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high pressure/steam jet cleaning)			
Cable Length	Pre-wired with 130mm of cable			
Supplied Rims	95950590 Black plastic rim - EuroLED® 95 95950585 White plastic rim - EuroLED® 95			
Compliance	<u>&</u>			
Additional rims and housings are available see page 227.				

EuroLED® 75 Down Lights - Recess Mount

This down light features the latest in LED technology and is available in two white colour temperatures. Both the cool white and the warm white option feature a smooth, evenly distributed illumination and an optic specifically designed to reduce individual light source glare, which can lead to discomfort and eye strain. Each down light includes a black and a white plastic rim.








P/N 2JA 958 109-031

Black and white supplied plastic rims






Part Number	2604	WHITE
Mounting	Flush Mount	
Voltage	Multivolt™ for optimum brightness at input voltage from 9 to 32	volts.
Power Consumption	6W	
Temperature Range	-40°C to + 60°C	
Protection	Fully sealed against dust and moisture to IP 69	
Cable Length	Pre-wired with 310mm of sheathed multi-core cable.	
Accessories	9.2604.05 CargoLED mounting spacer	
Compliance	△	

CargoLED Interior Lamp - Recess Mount


CargoLED interior lamp features dust-proof housing that is made from high quality aluminium and ABS ensuring maximum durability and long service life, even in extremely cold or humid environments. Fully sealed to withstand high-pressure washing.



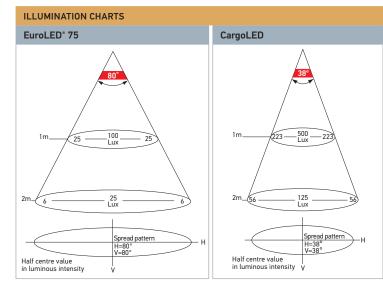



P/N 9.2604.05 CargoLED mounting spacer



DuraLED® Combi-S 50 White LED Lamp

DuraLED® Combi-S white 50 LED lamps are an extremely powerful source of white light and are available in two light patterns, Spread and Wide Spread, to suit a variety of uses including engine rooms, storage lockers or other heavy duty applications where reliability cannot be compromised. Each lamp is completely sealed, UV, impact and shock resistant ensuring an ultra-long service life.





2JA 980 629-001





173			
Part Number	2JA 980 629-501	WIDE SPREAD	
Part Number	2JA 980 629-001	SPREAD	
Mounting	lounting Two hole surface mount with mounting bushes supplied.		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.		
Power Consumption <12W			
Protection Reverse polarity and transient spike circuit protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high pressure/steam jet cleaning)			

Cable Length Pre-wired with 2.5m of cable.





Ultra slim height of only 25mm.

DuraLED® Combi-S 50 White LED Lamp - Charcoal


DuraLED® Combi-S white 50 LED charcoal lens is an extremely powerful source of white light offering a safe, energy efficient and reliable alternative to incandescent and fluorescent lighting. Lens manufactured from Grilamid® clear nylon which features high UV and chemical resistance, and high impact strength. The lamp is fully sealed against dust and moisture ingress.



Part Number	98060403 WIDE SPREA	
Mounting	Two hole surface mount with mounting bushes supplied.	
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.
Power Consumption	<12W	
Protection	As per P/N 2JA 980 629-501 above.	
Cable Length	Pre-wired with 2.5m of cable.	
Lens Material	High impact and chemical resistant Grilamid® lens	
Compliance		




Ultra slim height of only 25mm.

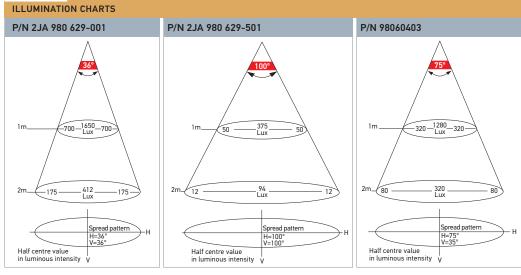







Part Number	2JA 980 629-601	SPREAD	
Mounting	Two hole surface moun	t with mounting bushes supplied.	
Voltage	Multivolt™ for optimum	brightness at input voltages from 9 to 33	olts.
Power Consumption	<12W		
Protection	Reverse polarity and transient spike circuit protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high pressure/steam jet cleaning)		
Cable Length	Pre-wired with 130mm of cable with DT connector.		
Lens Material	High impact and chemical resistant Grilamid® lens		
Accessories	8KA 958 360-001 2 Pole Switch plug and socket (300mm) 8KA 958 361-001 2 Pole Y-splitter joint plug and socket (300mm) 8KA 958 363-001 2 Pole DT extension plug and socket (2.5m)		
Compliance			

DuraLED® Combi-S 50 White LED Lamp with DT Connector

DuraLED® Combi-S white 50 LED is an extremely powerful source of white light offering a safe, energy efficient and reliable alternative to incandescent and fluorescent lighting. Lens manufactured from Grilamid® clear nylon which features high UV and chemical resistance, and high impact strength. The lamp is fully sealed against dust and moisture ingress.





Ultra slim height of only 25mm.




Rear view showing DT Connector

8KA 958 360-001 (Switch) Part Number 8KA 958 361-001 (Y-Splitter Joint) 8KA 958 363-001 (Extension Cable)

DT Connectors - 2 Pole Plug, Socket and Switch Accessories



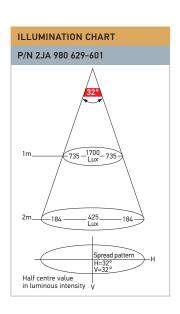


DuraLED® White 36 LED Lamp

White high brightness LED lamp with Grilamid® lens. Exceptional light output, incorporating high efficacy electronics and LEDs resulting in low power consumption (<9 watts) and low heat. Lens manufactured from Grilamid® clear nylon which features high UV and chemical resistance, and high impact strength. The lamp is fully sealed against dust and moisture ingress.





P/N 9593721





MULTI

Part Number	WHITE LENS CHARCOAL LENS				
Part Number	95903720	95903721 SPR			
Mounting	Two hole surface mount with m	nounting bushes supplied.			
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.				
Power Consumption	<9W				
Protection	Reverse polarity and transient spike circuit protection. IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)				
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.				
Lens Material	High impact and chemical resistant Grilamid® lens				
Compliance	(€				
See nage 80 for Dural E	See nage 80 for Dural ED® accessories				


DuraLED® White 36 LED Lamp

White LED interior lamp with either a diffusion or clear acrylic lens. The lamps are shock and vibration proof and are fully sealed against dust and moisture ingress.







P/N 2JA 959 037-511



5	2JA 959 037-501	DIFFUSED	
Part Number	2JA 959 037-511	SPREAD	
Mounting	Two hole surface mount with mounting bushes supplied.		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.	
Power Consumption	<9W		
Protection	See DuraLED® White 36 LED Lamp above.		
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.		
Lens Material	Acrylic		
Compliance	C€	<u>&</u>	

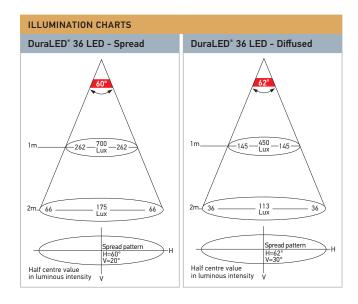





Part Number	98060801 SPREAD		
Mounting	Two hole surface mount with mounting bushes supplied.		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.	
Power Consumption	5W		
Protection	Reverse polarity and transient spike circuit protection. IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion	n)	
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.		
Compliance	(€	<u>&</u>	
See page 80 for DuraLED® accessories.			

DuraLED® White 20 LED Lamp


White high brightness LED lamp. Exceptional light output, incorporating high efficacy electronics and LEDs resulting in low power consumption (<5 watts) and low heat. The lamp is fully sealed against dust and moisture ingress.



Power Supply MULTI VOLT









Part Number	95970010	WIDE SPREAD
Part Number	95970400 (Includes switch)	WIDE SPREAD
Mounting	Two hole surface mount with mounting bushes supplied.	
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.	
Power Consumption	<3W	
Protection	Reverse polarity and transient spike circuit protection. Fully sealed against dust, high-pressure washing and temporary water immersion.	
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.	
	(€	


DuraLED® White 12 LED Lamp

White high brightness LED lamp. Exceptional light output, incorporating high efficacy electronics and LEDs resulting in low power consumption (<3 watts) and low heat. The lamp is fully sealed against dust and moisture ingress.





P/N 95970400

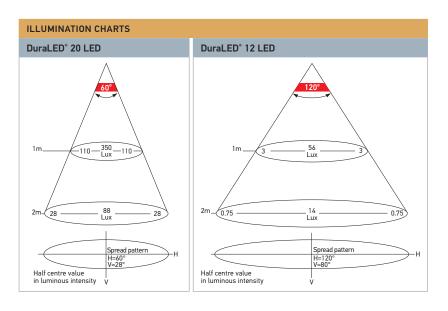


LED Interior/Exterior Strip Lamp - Surface Mount

LED interior surface mount strip lamps feature a shallow 11mm profile, completely sealed housing and class leading efficiency. The range is an ideal replacement for bulky fluorescent lighting and a wide range of wet or dry interior or exterior applications.





Ultra slim height of only 11mm.







Dant Neuroban	12 VOLT DC		24 VOLT DC	
Part Number	2652		2652-24V	WHITE
Mounting	Surface mount.			
Power Consumption	<3W			
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)			
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.			
Spare Parts	9.2652.09 White screw caps (MOQ 4) 9.1009.09 Charcoal screw caps (MOQ 4) 9.1009.10 Chrome plated screw caps (MOQ 4)			

LED Interior/Exterior Strip Lamp with Sealed Switch - Surface Mount

These LED interior surface mount strip lamps with sealed waterproof switch feature a shallow 11mm profile, completely sealed housings and class leading efficiency. The range is ideal for a wide range of interior or exterior applications.





2JA 958 121-011 White/Blue

2JA 958 121-001 White/Red




Ultra slim height of only 11mm.







	12 VOLT DC	24 VOLT DC	
5	2652-SW	2652-SW24V	WHITE
Part Number	2JA 958 121-011	2JA 958 121-411	WHITE/BLUE
	2JA 958 121-001	2JA 958 121-401	WHITE/RED
Mounting	Surface mount.		
Power Consumption	White function: <3W	Colour function: <	1W
Protection	As per P/N 2652		
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable. Dual colour lamps are pre-wired with 0.5m of twin core cable.		
Spare Parts	9.2652SW.09 1 White switch screw cap + 1 white standard screw cap 9.2652SW.10 1 Charcoal switch screw cap + 1 charcoal standard screw cap		
Note: P/N 2652-SW/24V includes charcoal and white screw caps. 2JA 958 121-xxxx include white screw caps only.			

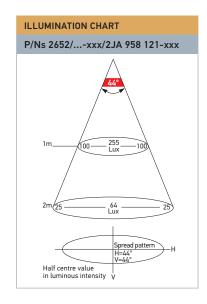

Light output directed downwards 283 Light output directed downwards

Part Number	12 VOLT DC	24 VOLT DC	
Part Number	98087900	98087910	WHITE
Mounting	Mounting Two hole surface	mount.	
Power Consumption	<3W		
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)		
Cable Length	Pre-wired with 2.5m of twin core cable.		
Lens Material	High impact and chemical resistant Grilamid® lens		
Spare Part	9.2652.09 White screw caps (MOQ 4) 9.1009.09 Charcoal screw caps (MOQ 4) 9.1009.10 Chrome plated screw caps (MOQ 4) 8HG 958 000-021 Mounting bracket 45° - Charcoal 8HG 958 000-011 Mounting bracket 45° - White		

See page 85 for surface mount strip lamp screw caps.

LED Awning Lamp - Surface Mount

LED awning lamp with an ultra slim profile of only 11mm, a heavy duty Grilamid* lens and low power consumption of less than 3W, HELLA's LED Awning Lamp is ideal for interior and exterior use. It comes complete with charcoal as well as white end caps and can be accessorised with a matching 45° mounting bracket to angle the beam further. Combining state of the art technology with sophisticated looks, this new low profile LED Awning Lamp is a lighting solution which will fit many applications. The precision optic, with a 15° downwards spread pattern, is designed to cause minimum glare.






P/N 8HG 958 000-021

P/N 8HG 958 000-011



Ultra slim height of only 11mm.

ILLUMINATION CHART P/Ns 98087900/...10

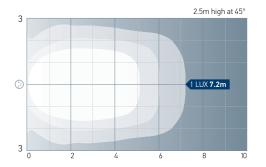

Illumination Charts Explained

HELLA light performance charts show illuminance and spread in an easy to read format. At the top is the horizontal spread angle, with the boundary threshold being defined as half of the peak luminous intensity. While there is light beyond the indicated angles, the majority of light will be inside the cone shown. Luminous intensity is the measure of light emanating from a source in a specific direction.

The difference between lux (illuminance) and lumen (luminous flux) is that lux takes into account the area over which the luminous flux is spread. Accordingly the lux value decreases with distance. Most interior lamps will be installed at around the 2 - 2.5 metre height.

As a guideline, some 40 – 100 lux is required for corridors and passageways, around 300 lux for reading and 500 – 800 lux for offices. The spread pattern may not always be designed as symmetrical so the spread horizontally (H) and vertically (V) are given.

Luminance and Illuminance is additive, meaning overlapping light patterns or multiple lamps lighting the same surface add their luminance.

One Lux represents the intensity of the light of a full moon (under clear atmospheric conditions) or just sufficient light by which to read a newspaper.


VTERIOR/EXTERIOR

LED White Interior/Exterior Strip Lamp - Recess Mount

White LED interior lamp with clear UV resistant acrylic lens. Ideal for steps, interior or exterior courtesy lighting and storage areas.











	12 VOLT DC	24 VOLT DC	
Part Number	2641-12V	2641-24V	WHITE
	2641HB	2641HB-24V	HIGH BRIGHTNESS WHITE
Mounting	Recess mount.		
Power Consumption	<2W		
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)		
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.		
Spare Part	9GD 959 155-507 Gasket		

LED Courtesy Strip Lamp - Surface Mount

These LED courtesy surface mount strip lamps feature a shallow 11mm profile and completely sealed housings. Available in blue, red and green colour variants.






P/N 2JA 980 881-602 P/N 2JA 980 881-802



Ultra slim height of only 11mm.








	12 VOLT DC	24 VOLT DC	
Part Number	2JA 980 881-402	2JA 980 881-502	BLUE
	2JA 980 881-602	2JA 980 881-702	RED
	2JA 980 881-802	2JA 980 881-902	GREEN
Mounting	Surface mount.		
Power Consumption	<2W		
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)		
Cable Length	Pre-wired with 0.5m of sheathed multi-core tinned cable.		
Spare Parts	9.2652.09 White screw caps (MOQ 4) 9.1009.09 Charcoal screw caps (MOQ 4) 9.1009.10 Chrome plated screw caps (MOQ 4)		

See page 85 for surface mount strip lamp screw caps.

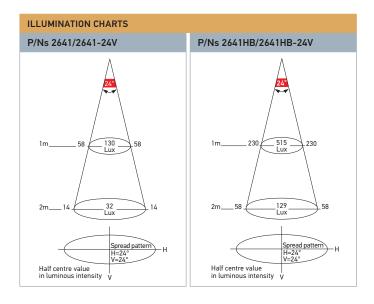





HELLA LED Luminaires provide superior quality lighting solutions for Interior/Exterior lighting.




LED Wide Rim Rectangular **Courtesy Step Lamp**


Wide rim, flush mount, courtesy step lamp with either white, red, green or blue LEDs. Optic appears clear until illuminated.





P/N 95968060









	12/24 VOLT (CLEAR LENS)			
	95968080	WHITE		
Part Number	95968070	RED		
	95968090	GREEN		
	95968060	BLUE		
Mounting	Recess mount.			
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.			
Power Consumption	<1W			
Protection	Reverse polarity protection. IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)			
Cable Length	Pre-wired with 120mm of cable.			
Compliance	(E	<u> </u>		

DuraLED® Surface Mount **Courtesy Lamp**

Blue, white or green LED courtesy lamps. Optic appears clear until illuminated.





P/N 95963025 P/N 95963055





See page 81 and 86 for spare parts and accessories.








	95963046	WHITE	
Part Number	95963025	BLUE	
	95963055	GREEN	
Mounting	Two hole surface mount.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	<1W		
Protection	Reverse polarity protection. IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)		
Cable Length	Pre-wired with 0.5m of cable.		
Compliance	C€	<u>&</u>	
See page 81 for spare p	See page 81 for spare parts and accessories.		









	98085510	WHITE	
5	98085515	WARM WHITE	
	98085525	AMBER	
Part Number	98085535	RED	
	98085540	BLUE	
	98085550	GREEN	
Mounting	Two hole flush mount.		
Voltage	Multivolt™ for optimum brightness in 12 and 24 volt systems.		
Power Consumption	<1W		
Protection	Reverse polarity protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)		
Cable Length	Pre-wired with 0.5m of sheathed multi-core cable.		
Lens Material	High impact and chemical resistant Grilamid® lens		
Compliance	<u>&</u>		

DuraLED® Flush Mount Courtesy Lamp - Low Profile

These LED courtesy lamps feature a shallow 9mm profile and completely sealed housing. Available in a range of colours. Optic appears clear until illuminated.





P/N 98085515

P/N 98085525





P/N 98085535

P/N 98085540



P/N 98085550

RIMS		
Part Number	Colour	Material
95968600	BLACK	PLASTIC
95968601	WHITE	PLASTIC
95968500	POLISHED	316 STAINLESS
95968506	SATIN CHROM PLATED	

SCREW CAPS			
Part Number	Colour	Quantity	
9.2310.09-BULK	BLACK		
9.2310.10-BULK	RED		
9.2310.11-BULK	WHITE		
9.2310.12-BULK	BLUE	PACK OF 4	
9.2310.13-BULK	GREEN	PACK OF 4	
9.2310.14-BULK	YELLOW		
9.2310.15-BULK	AMBER		
9.2310.16-BULK	GREY		



DuraLED° Flush Mount Courtesy Lamp Accessories

Accessory rims and screw caps for the LED flush mount courtesy lamp family.







LED Square Courtesy Lamps

Attractive, energy efficient square LED courtesy lamps for interior and exterior use. Available in either white, warm white, red or blue and supplied with a white and black rim. Optic appears clear until illuminated.














Part Number	12 VOLT DC	24 VOLT DC	
	98059604	98059614	WHITE
	98059704	98059714	WARM WHITE
	98058721	98058821	RED
	98058221	98058321	BLUE
Mounting	Recess mount, 50mm diameter hole.		
Power Consumption	<1W		
Protection	Reverse polarity protection. Fully sealed against dust, high-pressure washing and temporary water immersion.		
Cable Length	Pre-wired with 120mm of cable.		
Each lamp includes a black and a white plastic rim. See other available colours below			

Square Courtesy Lamp Accessories

Spare rims and housings for the square courtesy lamp family. One rim is required per lamp.



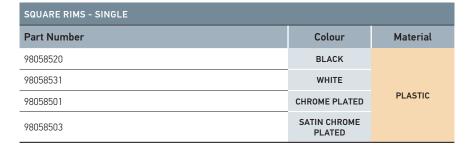





SQUARE HOUSING			
Part Number	Colour	Material	
95999360	BLACK	PLASTIC	
95999354	WHITE	FLASIIC	



Dimmable:







	12 VOLT DC	24 VOLT DC		
Part Number	98050051	98050151		WHITE
	98050071	98050171		WARM WHITE
	98050721	98050821		RED
	98050221	98050321		BLUE
Mounting	Recess mount with 50mm diameter hole.			
Power Consumption	1W			
Protection	Reverse polarity protection. Fully sealed against dust, high-pressure washing and temporary water immersion.			
Cable Length	Pre-wired with 120mm of cable.			

Each lamp includes a black and a white plastic rim. See other available colours below

LED Round Courtesy Lamps - Clear Lens

Attractive, energy efficient square LED courtesy lamps for interior and exterior use. Available in either white, warm white, red or blue and supplied with a white and black rim. Optic appears clear until illuminated.









P/N 98050071

P/N 98050721

P/N 98050221

ROUND RIMS - SINGLE			
Part Number	Colour	Material	
95950501	CHROME PLATED	PLASTIC	
95950520	BLACK	PLASTIC	
95950550	POLISHED	316 STAINLESS	
95950556	SATIN CHROME PLATED	STEEL	

ROUND HOUSING		
Part Number	Colour	Material
95999310	BLACK	PLASTIC
95999311	WHITE	FLASIIC



Round Courtesy Lamp Accessories

Spare rims and housings for the round courtesy lamp family. One rim is required per lamp.










DuraLED® WL200 Work Lamp - Close Range

LED universal work lamp with low profile stainless steel bracket. Lamp may be mounted upright or pendant and may be adjusted vertically up or down. Totally sealed against dust and moisture and with a tough, chemical resistant Grilamid® lens.















Part Number	98067030 WHIT			
Mounting	Upright or pendant.			
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 3	3 volts.		
Power Consumption	3W			
Actual Light Output	200 lumen			
Protection	Reverse polarity and voltage spike protection. IP 6K7 (Protection against dust and temporary water immersio IP 6K9K (Protection against dust and high-pressure/steam jet of			
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.			
Lens Material	High impact and chemical resistant Grilamid® lens			
Compliance	CE	<u>&</u>		

DuraLED® WL200 RFCommSafe™ Work Lamp - Close Range

LED universal work lamp with low profile stainless steel bracket developed with RFCommSafe™ technology. RFCommsafe™ products offer superior electromagnetic compatibility (EMC) dramatically removing the risk of unintended electromagnetic inference (EMI) on sensitive devices such as radios or communication equipment well beyond the requirement of international standards. Lamp may be mounted upright or pendant and may be adjusted vertically up or down. Hermetically sealed against dust and moisture. Featuring a tough, chemical resistant Grilamid® lens.


















Part Number	12 VOLT	24 VOLT				
Part Number	98067038	98067062	WHITE			
Mounting	Upright or pendant.					
Power Consumption	4W					
Actual Light Output	150 lumen					
Protection	Reverse polarity and voltage spike protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)					
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.					
Lens Material	High impact and chemical resistant Grilamid® lens					
Compliance	((

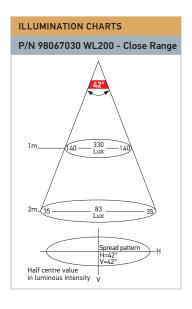













Part Number	CLOSE RANGE	FLOOD				
	98057310	98057300	WHITE			
Mounting	Upright or pendant.					
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.					
Power Consumption	7W					
Actual Light Output	550 lumen					
Protection	Reverse polarity and voltage spike protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)					
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.					
Lens Material	High impact and chemical resistant Grilamid® lens					
Compliance	CE E					

DuraLED® WL550 Work Lamp

LED universal work lamp with low profile stainless steel bracket. Lamp may be mounted upright or pendant and may be adjusted vertically up or down. Totally sealed against dust and moisture and with a tough, chemical resistant Grilamid* lens. Option of two light patterns, close range or flood.



















Part Number	98095003 WH			
Mounting	Upright or pendant.			
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33	3 volts.		
Power Consumption	High intensity mode: 12W (1A@12V DC/0.50A@24V DC) Low intensity mode: 2W (0.17A@12V DC/0.08A@24V DC)			
Actual Light Output	750 lumen			
Protection	Reverse polarity and voltage spike protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)			
Cable Length	Pre-wired with 2.5m of sheathed multi-core cable.			
Lens Material	High impact and chemical resistant Grilamid® lens			
Compliance	C€	<u>&</u>		

DuraLED® WL750 Work Lamp - Close Range

Featuring an integrated dual intensity circuit, a high level of spike protection and energy efficient Multivolt™ technology, the innovative DuraLED® WL750 will appeal for applications where energy efficiency and reliability is a must. Features a tough, chemical resistant Grilamid® lens, a highly impact resistant Swiss-made crystal clear polyamide with superior tolerance to chemical and long term harsh UV exposure, as well as technologically advanced thermally conductive non-metal housing.



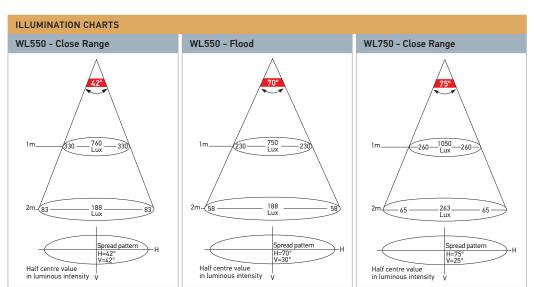



Friction mounts; easy adjustment without tools




Completely sealed lamp/ cable entry. Marine grade stainless steel bracket.

LED Flexible Map Reading Lamp

LED map reading light featuring a strong flexible shaft and an on/off switch on the lamp head. Low power consumption.








Part Number	2638	150MM ARM SIZE			
	2639	400MM ARIM SIZE			
Mounting	Screw mount.				
Voltage	Multivolt™ for optimum brightness at input voltage from 9 to 31 volts.				
Power Consumption	2.4W				
Protection	Reverse polarity protection. IP 53 (Protection against dust and water spray)				
Cable Length	Pre-wired with 150mm of cable.				
Compliance	C€				
Suitable for interior use only.					


Map Reading Lamp


Flexible black arm. Lamp head has an integral rocker on/off switch and is fitted with a clear diffuser lens for glare-free illumination.

Pillar or dash mounting. Includes additional red lens.





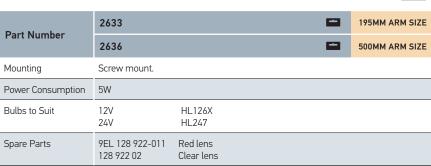


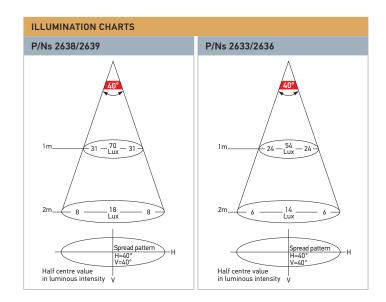









	12 VOLT DC	24 VOLT DC				
Part Number	2JA 958 358-001	2JA 958 358-201	WHITE			
	2JA 958 358-011	2JA 958 358-211	WARM WHITE			
Mounting	Wall mount.					
Voltage	12V DC or 24V DC					
Power Consumption	<3W					
Protection	Electronics are completely sealed from moisture and dust ingress.					
Cable Length	Pre-wired with 100mm of cable					
Compliance	<u>&</u>					


LED Ponui Gen 2 Wall Mount Lamp


LED Ponui Gen 2 wall mount interior lamp is an energy efficient and high quality wall light offering an attractive and modern design in a chrome plated housing. Both the cool white and the warm white option feature a smooth, evenly distributed illumination and an optic specifically designed to reduce individual light source glare, which can lead to discomfort and eye strain.





P/N 2JA 958 358-011

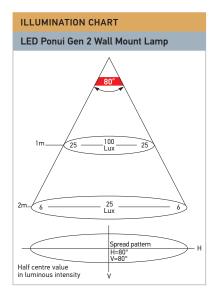

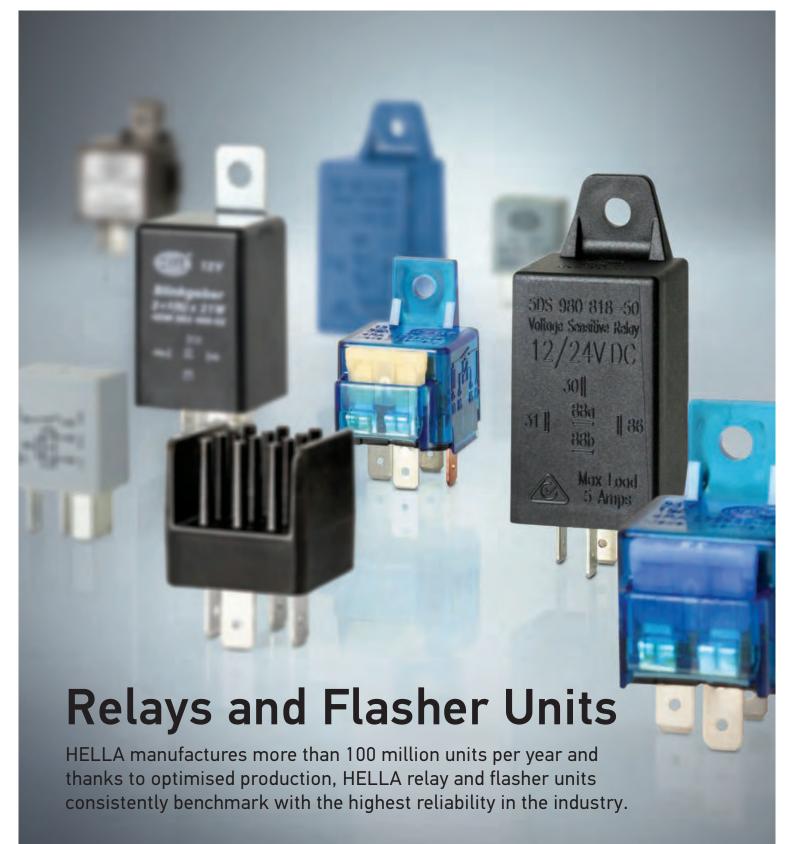





Contents

Relays and Flasher Units


Relay Quick Reference Chart	235
Normally Open Relays 12 Volt	236
Normally Open Relays 24 Volt	237
Normally Open Fused Relays	238
High Capacity Normally Open Relays	239
Change-over Relays 12 Volt	240
Change-over Relays 24 Volt	241
Time Control Relays	242
Micro Relays/Solid State Relays	243
Safety DayLights™ Smart Controllers	244
Voltage Sensitive Relay	245
HCS Flasher Units 12 Volt	246
HCS Flasher Units 24 Volt	247
Flectronic Flasher Units	2/8-251

HELLA RELAYS

HELLA offers a comprehensive range of relays to suit 12 and 24 volt applications. Quality accessories facilitate the expansion into new applications and provide customers with new solutions.

COMMON PIN DESIGNATIONS FOR RELAYS					
Pin No.	Description				
85/2	Earth (end of winding to ground or negative)	Eliminating Voltage Spikes			
86/1	Positive	Voltage spikes from 300V to 500V can occur momentarily when a relay is switched off. Sensitive electronic equipment can			
87/5	Output (to consumer e.g. driving lamp)	be damaged or malfunctions can occur if these spikes reach the			
87a/4	Alternative output (1st output, break side)	vehicle electrical network without suppression. A relay with a diode or resistor minimises voltage spikes.			
30/3	Positive supply (Input from + battery terminal, direct)	uloue of resistor minimises voltage spines.			

The Different Types of Relays

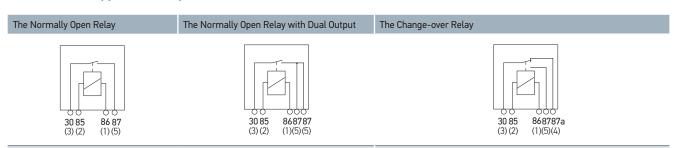

A normally open relay is used to close the electric circuit between power source and electrical load, e.g. the load is switched on. Relays are operated by means of switches, pulse generators or control devices.

Application: Headlamps, auxiliary driving lamps, auxiliary fog lamps, horns, heaters, motors for fans and power windows, air-conditioners and ignition assemblies.

The change-over relay changes the load path from one electrical load to another. The relay is operated by a dashboard switch.

Application: Switching over from town horn to fanfare horn, for 2 speed appliances such as heated rear window or fan motors.

Change-over relays can be used as:

- Change-over relays
- Normally open relays
- Normally closed relays

Relays have been predicted to be obsolete in modern vehicles, however the automotive industry needs relays since relay functions cannot always be replaced by control units. Only relays make "galvanic isolation" possible between input and output. Semi-conductor devices cannot manage this at the moment. Another positive factor is the cost advantage relays have compared with an electronic solution.

In motor vehicles, relays are used to switch high currents. For example the engine control unit is switched by a relay. Their sturdiness allows them to be installed near electric consumers. As only low control currents are required, the cable cross-sections can be kept small. The switching/amplifier function of a relay can only be achieved with a lot more effort and a lot less reliability using "modern" electronics. An additional advantage is that the replacement of a relay is quick and easy. These characteristics guarantee that relays will have a regular place in many vehicles for a long time to come.

Trust in our Quality Relays


- → Production expertise: HELLA produces more than 100 million relays per year. Thanks to optimised production we can offer a competitive price for customers. HELLA relays have an extremely low failure rate.
- → OEM customers: HELLA develops and produces relays for AGCO, Claas, Daimler AG, Ford, VW, GM, JCB, Opel, Nissan, John Deere, Chrysler and Jaguar/Land Rover among others. We have been working with many customers for decades.

RELAY QUICK REFERENCE CHART

						Current		
Part Number	Voltage	Pins	Function	Protection	Maximum Load	Draw	Bracket	Description
3078	12V	4	N/0		30A	140mA	Yes	
3078R	12V	4	N/0	Resistor	50A	140mA	Yes	Terminals 30 and 87 are 9.5mm termina
3053	12V	4	N/0	Diode	40A	170mA	Yes	- <u> </u>
3059	12V	4	N/0	Diode	50A	210mA	Yes	Terminals 30 and 87 are 8.1mm termina
3082	12V	5	N/0		40A	140mA	Yes	_
3055	12V	5	N/0	Diode	40A	170mA	Yes	
3079	24V	4	N/0		30A	70mA	Yes	
3079R	24V	4	N/0	Resistor	30A	90mA	Yes	_
3054	24V	4	N/0	Diode	22A	90mA	Yes	_
3060	24V	4	N/0	Diode	30A	90mA	Yes	Terminals 30 and 87 are 8.1mm termina
3083	24V	5	N/0		20A	70mA	No	
3056	24V	5	N/0	Diode	22A	90mA	Yes	
MINI RELAYS - N	NORMALLY O	PEN FUS	ED					
3076	12V	4	N/0		25A	140mA	Yes	
2077	2/1/		NI/O	-	154	00 1		
3077	24V	4	N/0	•	15A	80mA	Yes	
MINI RELAYS - 0	HANGE-OVE	R						
3080	12V	5	N/0-N/C		30-87, 30A/30-87a, 20A	140mA	Yes	_
8080R-BULK	12V	5	N/0-N/C	Resistor	3-5, 30A/3-4, 20A	140mA	Yes	_
3057	12V	5	N/O-N/C	Diode	30-87, 40A/30-87a, 15A	170mA	Yes	
3081	24V	5	N/O-N/C	-	30-87, 20A/30-87a, 10A	70mA	Yes	
3081R-BULK	24V	5	N/0-N/C	Resistor	3-5, 20A/3-4, 10A	70mA	Yes	_
3058	24V	5	N/0-N/C	Diode	30-87, 22A/30-87a, 10A	90mA	Yes	_
WEATHERPROOF	F RELAY - CH	IANGE-O	/FR	-		-	-	
3080S	12V	5	N/0-N/C	Resistor	30-87, 30A/30-87a, 20A	160mA	Yes	Connector P/N 4973S
SOLID STATE RE	LAY - NORM. 12V	ALLY OPI	N/O		22A		No	
3003	121	4	14/ 0		ZZA		110	
HIGH CAPACITY			_					
3084	12V	4	N/0		60A	140mA	Yes	Terminals 30 and 87 are 9.5mm termina
3061	12V	4	N/0		180A peak (100A continuous)	380mA	Yes	Terminals 30 and 87 are M6 studs
3085	24V	4	N/0		60A	70mA	Yes	Terminals 30 and 87 are 9.5mm termina
3062	24V	4	N/0		80A peak (60A continuous)	180mA	Yes	Terminals 30 and 87 are M6 studs
MICRO RELAY -	NORMALLY C	PEN						
3064	12V	4	N/0	Resistor	20A	140mA	No	Terminals 85 and 86 are 4.8mm
MICRO RELAY -	CHANGE-OVE	ED						
3065	12V	5 5	N/O-N/C	Resistor	30-87, 20A/30-87a, 10A	140mA	No	Terminals 85, 86 and 87a are 4.8mm
MICRO DEL AV								
MICRO RELAY - 3064L	LATCHING 12V	5	Latching		20A	140mA	No	Terminals 1, 2 and 6 are 4.8mm
		3	Latering		200	ITVIIIA	110	Terrimise i, 2 and 6 are 4.611111
TIME CONTROL I		-	N/0.11/0	2		A 20	V	
3086	12V	5	N/O-N/C		opened 10A, Contact closed 20A		Yes	-
3087	12V	5	N/O-N/C	Contact	opened 10A, Contact closed 20A	4 JUMIN	Yes	
3086-24V	24V	5	N/O-N/C	Contact	opened 10A, Contact closed 20A	4 30min	Yes	
3087-24V	24V	5	N/0-N/C	Contact	opened 10A, Contact closed 20A	∆ 30min	Yes	


Normally Open Mini Relay



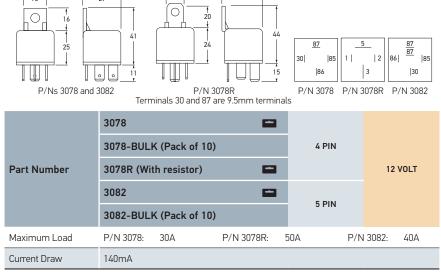


Normally Open Mini Relay with Diode




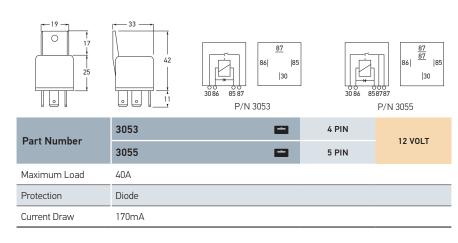


Normally Open Mini Relay with Diode



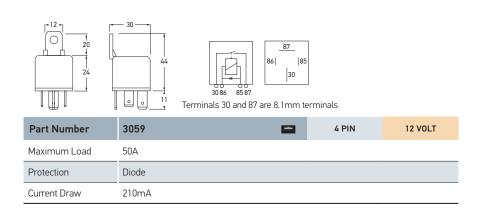

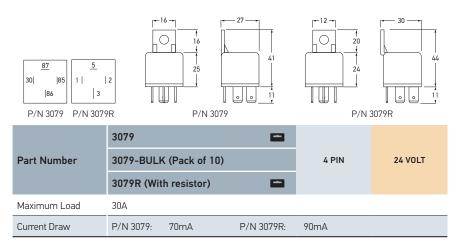


Normally Open Mini Relay




P/N 3079R



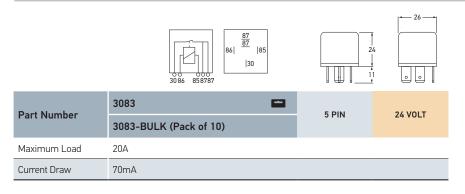


Normally Open Mini Relay - Without Bracket



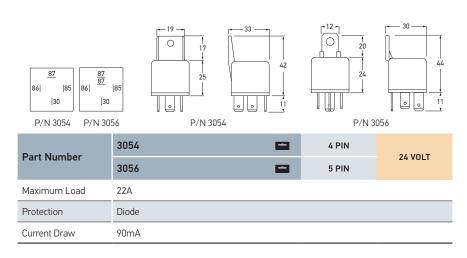

Normally Open Mini Relay With Diode



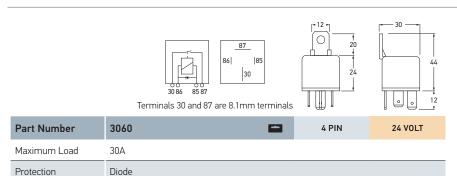

Current Draw


90mA

Normally Open Mini Relay With Diode




Normally Open Fused Relay - 12 Volt



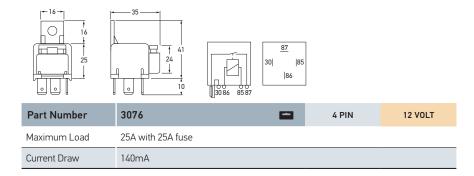

Normally Open Fused Relay - 24 Volt



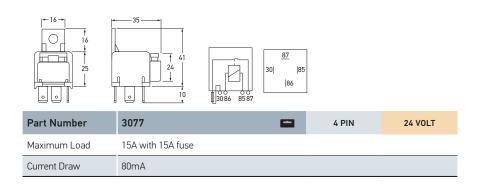


140mA

Part Number

Maximum Load

Current Draw






High Capacity Normally Open Relay - 12 Volt




Terminals 30 and 87 are 9.5mm terminals		l→— 35 —→l	33	
3084		4 PIN	12 VOLT	
60A				

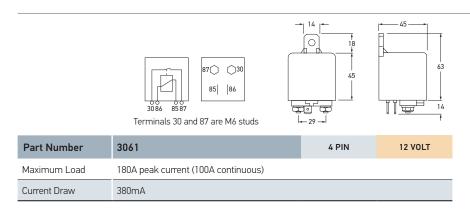


High Capacity Normally Open Relay - 12 Volt



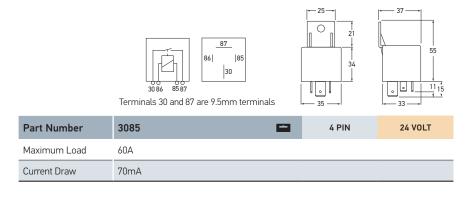

High Capacity Normally Open Relay - 24 Volt



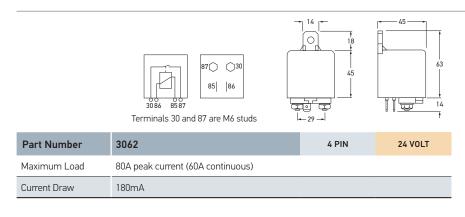


High Capacity Normally Open Relay - 24 Volt




Change-over Relay



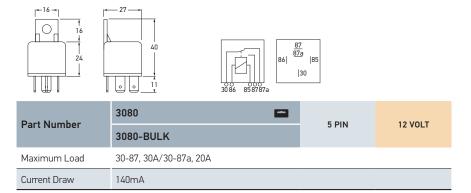

Change-over Relay with Resistor




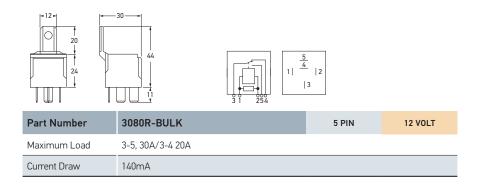

Weatherproof Change-over Relay

Change-over relay with matching plug to form a dust and weatherproof seal. Pre-wired connector with 300mm of 3 \times 2.90mm² cable and 2 smaller signal cables (to be purchased separately).



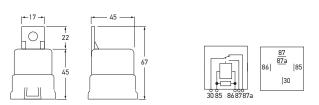


Part Number	3080S	5 PIN	12 VOLT		
Maximum Load	30-87, 30A, 30-87a, 20A				
Current Draw	160mA				
Spare Part	4973S Connector with cable	e			
Protection	Resistor				




P/N 4973S

Change-over Relay with Diode




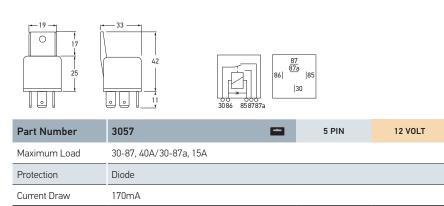

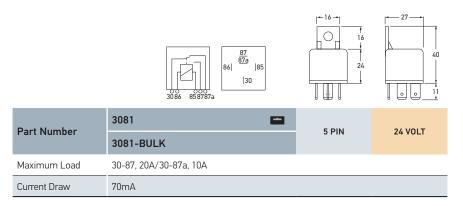


Change-over Relay



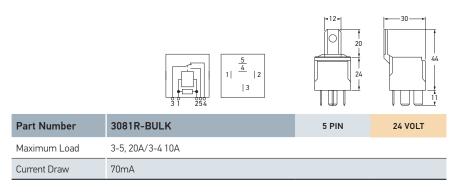

Change-over Relay with Resistor



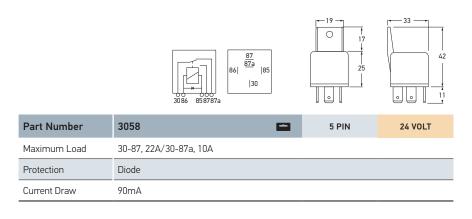

Change-over Relay with Diode



Part Number	4973	
Part Number	4973-BULK	PACK OF 50
Mounting	Single screw mounting.	
To Suit	4 and 5 pin relays with 6.3mm flat pin connectors.	
P/Ns 3076 and 3077 are not suitable for multiple installation using this connector.		

Mini Relay Connector

Single screw mounting. Sturdy plastic casing. Supplied with 5 blade terminals. Several holders may be joined together or mated with fuse holder P/N 8704.




Time Control Unit with Drop-out Delay

Relay with manually adjustable drop-out delay function, 0-900 seconds.





Switch view

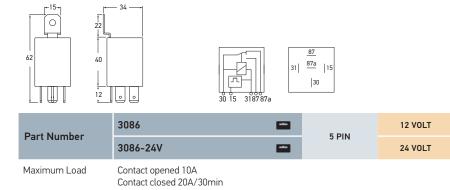

Switching terminal 15 starts timing.

Protection


Time Control Unit with Pick-up Delay

Relay with manually adjustable pick-up delay function, 0 – 900 seconds.





Switch view

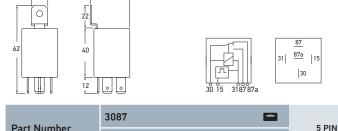

IP 50 (Protection against dust)

Part Number	3087		5 PIN	12 VOLT
	3087-24V		5 PIN	24 VOLT
Maximum Load	Contact opened 10A			

Contact closed 20A/30min


Protection IP 50 (Protection against dust)

Switching terminal 15 starts timing.

Normally Open (Solid State) Relay

Solid-state relays are modern semi-conductor switches. Satisfies the increasing trend of controlling loads (e.g. fan motors, glow plugs, headlamp and heaters) with power regulation.




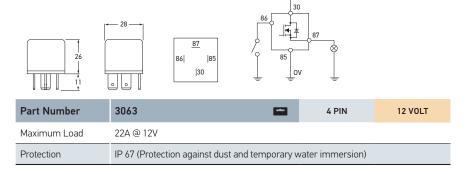

Q+12 V

FEATURES

- → Suitable for resistive loads, lamp loads and inductive loads.
- → Pulse width modulation allows regulation of the power for the loads.
- ightarrow Maximum switching reliability, particularly suited for switching functions relevant for safety.
- → Silent switching, e.g. in passenger compartment.
- → Resistant to short-circuit and overload.
- → Protection against polarity reversal and earth disconnection.
- → Shock and vibration-resistant.
- → Water-proof, potted design.
- → Protection against overheating.
- → Low quiescent current.

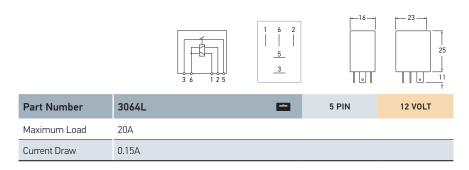


Latching On/Off Micro Relay

Latching relay that will remain in its open or closed state when power is removed, i.e. it will remain on or off and not automatically return to off. A negative (-) voltage pulse is required on either terminal 1 or 2 to switch on or off.





Part Number	NORMALLY OPEN		
Part Number	3064	4 PIN	12 VOLT
Maximum Load	20A @ 12V		
Protection	Resistor		



Part Number	CHANGE-OVER		
Part Number	3065	5 PIN	12 VOLT
Maximum Load	3-5 20A/3-4 10A		
Protection	Resistor		
Terminal designations: 1 = 86, 2 = 85, 3 = 30, 4 = 87a, 5 = 87.			

Micro Relay

Micro relay with parallel resistor. P/N 3064 features two 4.8mm and two 6.3mm blade terminal contacts (terminals 3 and 5). Change-over relay P/N 3065 features three 4.8mm and two 6.3mm blade terminal contacts (terminals 3 and 5).



Part Number	4973-M		5 POLE
Socket	et 5 pole		
To Suit	P/Ns 3064, 3064L and 3065.		

Micro Relay Connector

For micro-relays with 5 pole SAE terminal arrangement. For receiving three 4.8mm and two 6.3mm blade terminal connectors. Made of black plastic.



Safety DayLights™ Smart Controller - Advanced*


This smart controller is designed to simplify the installation of HELLA's LED Safety DayLights $^{\text{\tiny M}}$ range by eliminating the need to wire the lamp, or changeover relay to ignition terminal 15.

The Safety DayLights™ Smart Controller can be wired directly to the positive terminal of the battery, which saves the difficult and often time consuming task of finding the ignition feed.

The smart controller monitors the voltage supply from the battery and will automatically switch the Safety DayLights™ on when the engine is started, and automatically switch them off when the headlamps are activated, or the engine is turned off.

*Advanced version with vibration monitor for installation in vehicles with fuel saving alternators.










Part Number	3090
	3090-BULK
Voltage	Multivolt™, suitable for 12 and 24 volt systems.
Maximum Continuous Load	20W
To Suit	HELLA LED Safety DayLights™ range.

Features a Safety DayLights™ OFF delay of approximately 10 seconds.

WIRING SPECIFICATIONS		
Terminal Number	Connect to	
30	Battery (+)	
31	Earth return (-)	
86	Front position or headlamps (+)	
DL1 & DL2	Safety DayLights [™] (+)	

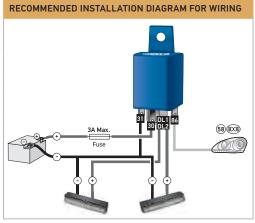


Safety DayLights™ Smart Controller - Standard

This smart controller is designed to simplify the installation of HELLA's LED Safety DayLights $^{\text{\tiny M}}$ range by eliminating the need to wire the lamp, or changeover relay to ignition terminal 15.

The Safety DayLights™ Smart Controller can be wired directly to the positive terminal of the battery, which saves the difficult and often time consuming task of finding the ignition feed.

The smart controller monitors the voltage supply from the battery and will automatically switch the Safety DayLights $^{\rm m}$ on when the engine is started, and automatically switch them off when the headlamps are activated, or the engine is turned off.











Part Number	3091
Part Number	3091-BULK
Voltage	Multivolt [™] , suitable for 12 and 24 volt systems.
Maximum Continuous Load	20W
To Suit	HELLA LED Safety DayLights™ range.


Features a Safety DayLights™ OFF delay of approximately 10 seconds.

WIRING SPECIFICATIONS	
Terminal Number	Connect to
30	Battery (+)
31	Earth return (-)
86	Front position or headlamps (+)
DL1 & DL2	Safety DayLights™ (+)

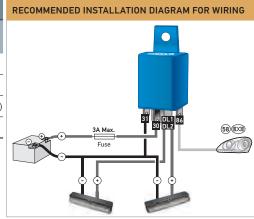








Part Number	3099
Voltage	Multivolt [™] , suitable for 12 and 24 volt systems.
Mounting	Recess or surface mount.
Maximum Continuous Load	140A
Termination	2 x 6mm studs

Voltage Sensitive Relay Module

Digital voltage sensitive relay with dual sensing for 12 and 24 volt systems. Suitable for boats, caravans and 4WD vehicles, this relay allows a separate battery to be used independently from another battery permitting, for example, the starting battery not to be discharged. However when either battery is charged, the relay will connect both batteries to allow dual charging. The relay automatically detects either 12 or 24 volt operation. Very low power consumption (less than 2mA) or none in power storage mode.







Part Number	3101
	3101-BULK
Voltage	Multivolt [™] , suitable for 12 and 24 volt systems.
Maximum Continuous Load	5A
Compliance	<u>&</u>

WIRING SPECIFICATIONS		
Terminal Number	Connect to	
30	Battery (+)	
31	Earth return (-)	
86	Activate (+) / Deactivate VSR (- or open)	
88a & 88b	Dual outputs (+)	

	PRE-SET VOLTAGE LIMITS AND OPERATION				
VSR turns outputs ON when VSR turns outputs OFF when					
Battery voltage is above 13.4V DC	Battery voltage is below 12.8V DC				
Battery voltage is above 26.8V DC Battery voltage is below 25.6V DC The pre-set voltage values stated above may vary by +/- 3%.					
			ON when Battery voltage is above 13.4V DC Battery voltage is above 26.8V DC The pre-set voltage va		

Voltage Sensitive Relay Module

The Voltage Sensitive Relay (VSR) is designed to automatically monitor the battery condition of your vehicle through constant voltage measurements. Then depending upon the voltage level the VSR will activate or deactivate the connected load to prevent the battery from over-discharging.




The Voltage Sensitive Relay installation must be protected by a suitably rated fuse.

HCS Electronic Flasher Unit - 2+1+1

LED compatible flasher unit specifically designed for use with HCS (HELLA Compatibility Solution) LED indicator lamps. Provides stable flash rate and reliable bulb/LED lamp failure indication, for towing vehicles and trailers. Suitable to operate combinations of HCS LED and conventional 21W bulb-type lamps.




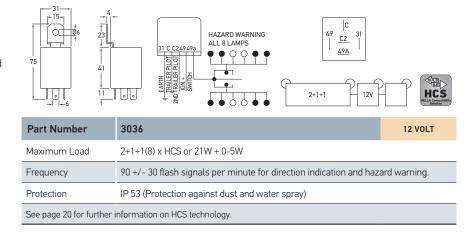

HCS Electronic Flasher Unit - 3+1

LED compatible flasher unit specifically designed for use with HCS (HELLA Compatibility Solution) LED indicator lamps. Provides stable flash rate and reliable bulb/LED lamp failure indication, for towing vehicles and trailers. Suitable to operate combinations of HCS LED and conventional 21W bulb-type lamps.




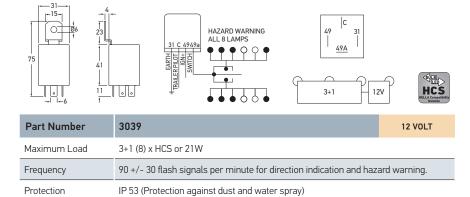

COMMON PIN DESIGNATIONS FOR FLASHER UNITS		
Terminal Number	Description	
49/X	Flasher input (+)	
49a/L	Flasher output (+) to lamps or indicator switch	
30b	Flasher input (+) from hazard switch	
31	Earth (-)	
C/C1/CP/P	Pilot lamp output (+)	
C2	1st trailer pilot lamp output (+)	
C3 2nd trailer pilot lamp output (+)		

See page 20 for further information on HCS technology

RELAYS AND FLASHER UNITS

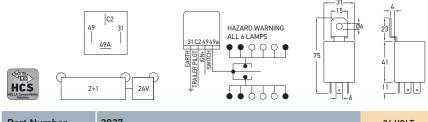


Part Number	3037	24 VOLT
Maximum Load	2+1 (6) x HCS or 21W + 0-5W	
Frequency	90 +/- 30 flash signals per minute for direction indication and hazard warning. IP 53 (Protection against dust and water spray)	
Protection		
See page 20 for further information on HCS technology.		

HCS Electronic Flasher Unit - 2+1

LED compatible flasher unit specifically designed for use with HCS (HELLA Compatibility Solution) LED indicator lamps. Provides stable flash rate and reliable bulb/LED lamp failure indication, for towing vehicles and trailers. Suitable to operate combinations of HCS LED and conventional 21W bulb-type lamps.



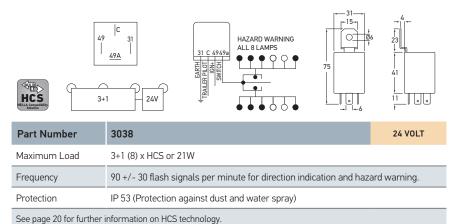

HCS Electronic Flasher Unit - 3+1


LED compatible flasher unit specifically designed for use with HCS (HELLA Compatibility Solution) LED indicator lamps. Provides stable flash rate and reliable bulb/LED lamp failure indication, for towing vehicles and trailers. Suitable to operate combinations of HCS LED and conventional 21W bulb-type lamps.



High Capacity Flasher Unit

High capacity electronic flasher unit. Complete with bracket. Designed to take up to 210W loads. Reverse polarity protection, polycarbonate cover and silver contacts. Clear audible signal.








Part Number	3026	2 PIN	12 VOLT
Maximum Load	1-10 x 21W		

High Capacity Flasher Unit

High capacity electronic flasher unit. Complete with bracket. Designed to take up to 210W loads. Reverse polarity protection, polycarbonate cover and silver contacts. Clear audible signal.







Don't November	3027	3 PIN	12 VOLT
Part Number	3028		24 VOLT
Maximum Load	1-10 x 21W		

Universal Mounting Bracket


For mounting 32mm diameter HELLA flasher unit P/Ns 3026, 3027, 3028.



Part Number	8003








	→ 31 →
31	
11 0	

Part Number	3040	3 PIN
Voltage	9-33V DC (suitable for 12V and 24V)	
Maximum Load	42W max.	
Frequency	90 +/- 30 flash signals per minute for direction indication and hazard warning.	
Protection	IP 53 (Protection against dust and water spray)	

Electronic Flasher Unit

LED compatible flasher unit for universal connection of LED indicator lamps without electronic pulse. Maintains the standard flash rate of 90 +/- 30 fpm and operates on bulb and LED loads from 1W to 42W.






Part Number	3016	3 PIN	12 VOLT
No. of Bulbs	2(4) x 21W + 0 - 5W		

Electronic Flasher Unit

To operate 2 or 3 lamps on either side of vehicle.



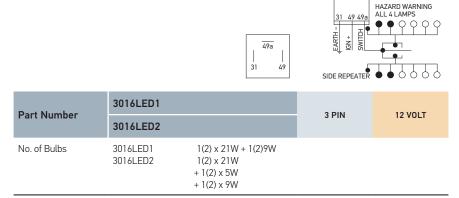



LED Electronic Flasher Unit


Modified version of P/N 3016 electronic flasher unit. Specifically designed for use with $\mathsf{DuraLED}^\circ$ rear direction indicator lamps on motor vehicles such as prime movers, trucks and motor homes, maintaining the mandatory bulb failure warning signal function.



High Capacity Flasher Unit

Heavy duty flasher unit manufactured to take up to 200W loads.



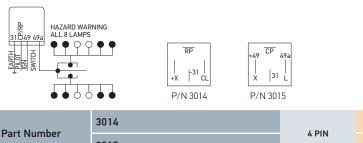


ı	Part Number 3015	/ DIN	12 VOLT	
ľ		3015	4 PIN	24 VOLT
Ī	Load	10-200W		

Electronic Flasher Unit - 2+1

Flasher unit designed to operate 2 or 3 lamps on either side of a vehicle with caravan or trailer. Includes mounting bracket. Separate pilot lamp indicates operation of flasher lamp on the trailer.




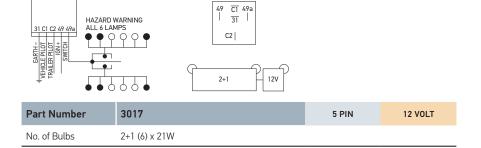


Electronic Flasher Unit - 2+1

Flasher unit designed to operate 2 or 3 lamps on either side of a vehicle with caravan or trailer. Includes mounting bracket. Separate pilot lamp indicates operation of flasher lamp on the trailer.



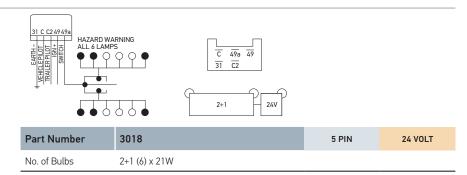


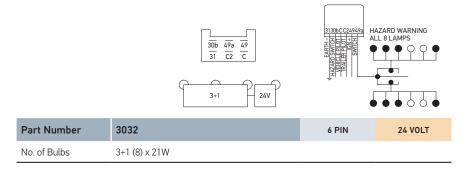

Electronic Flasher Unit - 3+1

For heavy trucks with trailers. With mounting bracket. To operate 3 lamps on either side of towing vehicle, plus an additional lamp on either side of a trailer. Separate pilot lamp indicates operation of flasher lamp on the trailer.




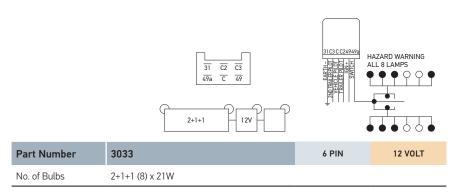

Electronic Flasher Unit - 2+1+1

To operate 2 lamps on either side of a towing vehicle plus an additional lamp on either side of each of two trailers. Separate pilot lamps indicate operation of flasher lamps on the trailers.



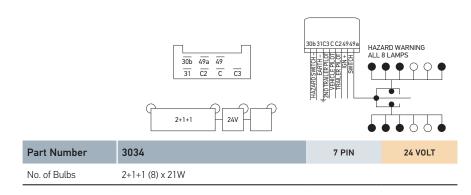

Electronic Flasher Unit - 2+1+1


To operate 2 lamps on either side of a towing vehicle plus an additional lamp on either side of each of two trailers. Separate pilot lamps indicate operation of flasher lamps on the trailers.





All HELLA accessory products are extensively tested for quality, durability and function prior to being offered under the HELLA brand.



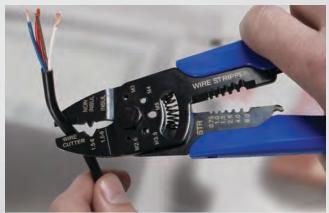

Contents


Accessories

Rotary Switches	254	2 Pole Plugs and Sockets	.292-293
Toggle Switches	255-258	Horns	.294-296
Rocker Switches	259-265	Warning and Reversing Alarms	.297-299
Rocker Switch Accessories	266-267	Heavy Duty Reversing Alarms	300
Rocker Switch Symbols	268	Vacuum Pumps	301
Stainless Steel Push Switches	269	Turbo Fans/Circuit Testers	302
Push Switches	270-271	Crimping Tools	303
Push/Pull Switches	272	DT Connectors	.304-305
Switch Panels	273	Super Seal Connectors	.306-307
Battery Switches	274-276	Crimp Terminals/Connectors	.308-309
Battery Selector Switches	277	Crimp Terminal Assortment Kits	310
Ignition and Starter Switches	278-279	Cable Connectors	311
Stop Lamp Switches	280	Insulated Crimp Terminals	311
Door Contact Switches	281	Junction Boxes	312
Pilot Lamps	282-283	Brass Connectors	313
Trailer Plugs and Sockets	284	Connectors/Insulation Tape	314
7 Pole Round Plugs and Sockets.	285	Nylon Cable Ties	315
7 Pole Flat Plugs and Sockets	286	Blade Fuses	.316-317
5/7 Pole ABS/EBS Plugs and Soc	ckets287	Fuses and Circuit Breakers	318
7 Pole Plugs and Sockets	288	Fuse Holders	.319-320
13 Pole Plugs and Sockets	289	Blade Fuse Boxes	.321-322
7/13 Pole Plugs and Sockets	290	Fuse Links	.323-325
15 Dala Dlugs and Sackats	201		

Rotary Switch - Off-On

Rotary switch with round knob.






	В	
Part Number	4020	OFF-ON
Mounting	12.5mm diameter opening.	
Maximum Load	15A @ 12V 7.5A @ 24V	
Protection	IP 53 (Protection against dust and water spray)	

Rotary Switch - Off-On

Rotary switch with flat knob.




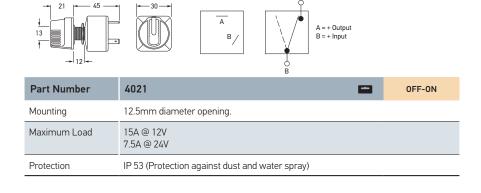

Illuminated Rotary Switch, Off-On - 12 Volt

Illuminated by inbuilt 12V capillary bulb, complete with red, amber and green lenses.






Part Number	4022		OFF-ON
Mounting	12.5mm diameter opening.		
Maximum Load	15A @ 12V		
Protection	IP 53 (Protection against dust and water spray)		
Suitable for 12V only. Bulb not replaceable.			

Rotary Headlamp Switch - Off-On-On


Rotary switch with round knob.





Part Number	4023	OFF-ON-ON
Mounting	12.5mm diameter opening.	
Maximum Load	23A @ 12V 11.5A @ 24V	
Protection	IP 53 (Protection against dust and water spray)	


ACCESSORIES



Part Number	4456	0FF-0N
Mounting	13mm diameter opening.	
For Panels	Up to 6mm thick.	
Maximum Load	15A @ 12V 7.5A @ 24V	

Toggle Switch - Off-On






Part Number	4202	ON-OFF-ON
Mounting	13mm diameter opening.	
For Panels	Up to 6mm thick.	
Maximum Load	15A @ 12V 7.5A @ 24V	

Toggle Switch - On-Off-On

Toggle switch, suitable for controlling direction indicator lamps.






Part Number	4460	(ON)-OFF-(ON)
Mounting	13mm diameter opening.	
For Panels	Up to 6mm thick.	
Maximum Load	15A @ 12V 7.5A @ 24V	

Momentary Spring Return Switch - (0n)-0ff-(0n)

Momentary on-off-on, spring return aerial switch. Flick toggle with spring return to centre.





Part Number	4056	OFF-ON-ON
Mounting	13mm diameter opening.	
For Panels	Up to 6mm thick.	
Maximum Load	20A @ 12V 10A @ 24V	

Headlamp Switch - Off-On-On

Three position switch:

Upper = Off


Centre = Position lamps

Lower = Headlamps and position lamps



Metal Shaft Toggle Switch





	4451 I	-	OFF-ON
Part Number	4302 I	-	ON-OFF-ON
	4461 (Momentary spring return)	-	(0N)-0FF-(0N)
Mounting	12mm diameter opening.		
For Panels	Up to 5mm thick.		
Maximum Load	20A @ 12V 10A @ 24V		

Metal Shaft Toggle Switch - Off-On



Part Number	4203	-	OFF-ON
Mounting	12mm diameter opening.		
For Panels	Up to 5mm thick.		
Maximum Load	15A @ 12V 7.5A @ 24V		

Aircraft Style Switch Cover - Red

Red aircraft style switch cover to prevent accidental switch operation.



Part Number	4455	RED
To Suit	P/Ns 4451 and 4203.	

Toggle Boot

To be used with toggle switches.





Dart Number	4452	
Part Number	4452-BULK	PACK OF 10
To Suit	Toggle switch P/Ns 4302, 4451 and 4461.	

ACCESSORIES


P/N 4453 P/N 4454

Part Number	4453	OFF-ON		
Part Number	4454 (Momentary spring return)	OFF-(ON)		
Mounting	13mm diameter opening.			
For Panels	Up to 6mm thick.			
Maximum Load	8A @ 12V			

Plastic Toggle Switch







Part Number	4206	ON-OFF-ON		
Mounting	19mm diameter opening.			
For Panels	Up to 2mm thick.			
Maximum Load	6A @ 12V			
Bulb to Suit	12V 292			

Illuminated Toggle Switch, On-Off-On

Three position latching switch for indicators. Illuminates green.






Part Number	4457	OFF-ON
Mounting	12mm diameter opening.	
For Panels	Up to 6mm thick.	
Maximum Load	6A @ 12V	

Pre-wired Toggle Switch - Off-On





Part Number	2762	OFF-ON	
Mounting	11mm diameter opening.		
For Panels	Up to 6mm thick.		
Maximum Load	15A @ 12V 7.5A @ 24V		
Toggle boot P/N 4452 does not fit this switch.			

Brass Toggle Switch - Off-On

Chrome toggle and face nut. Brass construction.




CESSORIES

Illuminated Toggle Switch, Off-On - 12 Volt








Part Number	4433		RED	
	4434		GREEN	
	4435		AMBER	
	4436		BLUE	
Mounting	12.5mm diameter opening.			
For Panels	Up to 6mm thick.			
Maximum Load	aximum Load 10A @ 12V			
Suitable for 12V only. Bu	Suitable for 12V only. Bulb not replaceable.			

Illuminated Duckbill Switch, Off-On - 12 Volt





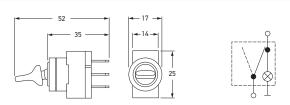

Part Number	4421	RED		
	4422	GREEN		
	4423	BLUE		
	4424	AMBER		
Mounting	12.5mm diameter opening.			
For Panels	Up to 6mm thick.			
Maximum Load	10A @ 12V			
Suitable for 12V only. Bulb not replaceable.				

Duckbill Switch





52 35	17	P/N 4152	P/N 4420	
Part Number	4420			OFF-ON
Part Number	4152			ON-ON
Mounting	12.5mm diameter opening.			
For Panels	Up to 6mm thick.			

Switch Mounting Panel

Single switch mounting panel. Plastic moulded with black grain finish.





10A @ 12V

Maximum Load

Part Number	4437	SINGLE
Mounting	12.5mm diameter opening.	

5A @ 24V

Part Number

Mounting

For Panels

Maximum Load

ACCESSORIES



4447

20mm diameter opening.

Up to 4mm thick.







0FF-0N
ON-ON

Rocker Switch

Panel push fit.









5	4445	AMBER			
Part Number	4446	RED			
Mounting	20mm diameter opening.				
For Panels	Up to 4mm thick.				
Maximum Load	Load 10A @ 12V				
Suitable for 12V only. Bulb not replaceable.					

Illuminated Rocker Switch, Off-On - 12 Volt

Panel push fit.





P/N 4446








LED Rocker Switch, Off-On - 12 Volt

Panel push fit.



Part Number	4448		RED
Mounting	20mm diameter opening.		
For Panels	Up to 4mm thick.		
Maximum Load	10A @ 12V		
Suitable for 12V only. LED included, not replaceable.			

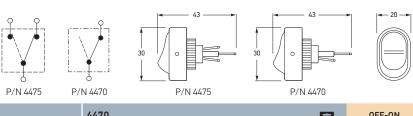

P/N 4475	P/N 4470	P/N 4475	P/N 4470	
Part Number	4470			OFF-ON
rait Nullibei	4475			ON-ON
Mounting	12mm diamet	12mm diameter opening.		
For Panels	Up to 5mm th	Up to 5mm thick.		
Maximum Load	10A @ 12V			

Rocker Switch



259

CCESSORIE

Illuminated Rocker Switch, Off-On - 12 Volt





P/N 4478

30 0	- 20	
447	'A	

		4476	AMBER
	Part Number	4477	GREEN
		4478	RED
	Mounting	12mm diameter opening.	
	For Panels	Up to 5mm thick.	
	Maximum Load	10A @ 12V	
Suitable for 12V only. Bulb not replaceable.			

LED Rocker Switch, Off-On - 12 Volt

P/N 4477






43 20 20 g3mm 4479

	4479	AMBER
Part Number	4480	GREEN
	4481	RED
Mounting	12mm diameter opening.	
For Panels	Up to 5mm thick.	
Maximum Load	10A @ 12V	
Suitable for 12V only. LED included, not replaceable.		

Illuminated Rocker Switch, Off-On - 12 Volt





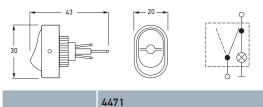

	4471	AMBER
Part Number	4472	BLUE
Part Number	4473	GREEN
	4474	RED
Mounting	12mm diameter opening.	
For Panels	Up to 5mm thick.	
Maximum Load	10A @ 12V	
Suitable for 12V only. Bulb not replaceable.		







Part Number	4426	OFF-ON
Mounting	29 x 12mm opening.	
Maximum Load	10A @ 12V 5A @ 24V	

Rocker Switch - Off-On

Panel push fit.









Part Number	4151	ON-ON
Mounting	29 x 12mm opening.	
Maximum Load	10A @ 12V 5A at 24V	

Rocker Switch - On-On

Panel push fit.







RED

GREEN

Illuminated	Rocker Switch,
Off-On - 12	Volt
Panel push fit.	






P/N 4428	P/N 4429	P/N 4430

4429BLUE4430AMBERMounting29 x 12mm opening.Maximum Load10A @ 12VSuitable for 12V only. Bulb not replaceable.

4427

4428

Part Number



Part Number	4431	SINGLE
rait Nullibei	4432	DOUBLE
To Suit	Rocker switch P/Ns 4426, 4427, 4428, 4429, 4430 and 4151.	

Rocker Switch Mounting Panel

Plastic moulded with black grain finish.




Heavy Duty Rocker Switch

Extremely robust rocker switch featuring push-on terminals and weather resistant black plastic housing. Panel push fit.





P/N 4483







P/N 4483 and 4484

	4482	OFF-ON
Part Number	4483	ON-OFF-ON
	4484 (Momentary spring return)	(0N)-0FF-(0N)
Mounting	20 x 36mm opening.	
For Panels	Up to 4mm thick.	
Maximum Load	25A @ 12V 12.5A @ 24V	







P/N 4483

P/N 4484


Rocker Switch, Black - Double Pole

Panel push fit.









Part Number	4485	OFF-ON
Mounting	20 x 35mm opening.	
For Panels	Up to 4mm thick.	
Maximum Load	20A @ 12V (10A per pole)	

Part Number

Mounting

For Panels

Maximum Load

4486A

4486G

4486R

20 x 35mm opening.

Up to 4mm thick.

10A @ 12V

Suitable for 12V only. LED included, not replaceable.





AMBER

GREEN

RED

LED Illuminated Rocker Switch, Off-On - 12 Volt

Panel push fit.

			0	
1	1		(1)	
		1		





P/N 4486G

4486G P/N 4486R





Part Number	4487A		AMBER
	4487B	-	BLUE
Part Number	4487G	2	GREEN
	4487R	-	RED
Mounting	20 x 35mm opening.		
For Panels	Up to 4mm thick.		
Maximum Load	10A @ 12V		
Suitable for 12V only. Bu	ılb not replaceable.		

Illuminated Rocker Switch, Off-On - 12 Volt

Panel push fit.





P/N 4487B

P/N 4487G


P/N 4487R

HELLA Universal Rocker Switches HELLA universal flush-fit rocker switches are readily adaptable to 12 and 24V applications. This large and varied range covers nearly all switching types and connections. A wide selection of symbols ensures proper labelling of all main switching and monitoring functions. The switching and control displays can be illuminated. Mounting Mounted directly to properly dimensioned opening (1 - 2.5mm thick) or by mounting panels (for more information see page 234). Maximum Load 16A @ 12V, 8A @ 24V. Connectors, symbols, mounts and bulb holders are to be purchased separately.



 $Location\ lamp\ illuminates\ lamp\ with\ park\ lights.\ Pilot\ lamp\ illuminates\ when\ switch\ is\ in\ the\ 'on'\ position.$

ON-OFF SWITCHES	ON-OFF SWITCHES				
Part Number	Symbol	Description	Function		
6EH 007 832-011	LOCATION	Suitable for use with location light.			
	PILOT	Suitable for use with location and pilot light.	ON-OFF		
6EH 007 832-021	LOCATION		UN-UFF		
/FILOOF 022 0/1	PILOT	With mechanism for blocking operation.			
6EH 007 832-041	LOCATION	Suitable for use with location light and pilot light.			



5 9	
3 7 9	
17 28 9	

MOMENTARY SPRING RETURN SWITCHES				
6GM 007 832-191	LOCATION	Suitable for use with location light.	OFF-(ON)	
6GM 007 832-221	LOCATION	Suitable for use with location light.	CHANGE-OVER	
6GM 007 832-251	LOCATION	Suitable for use with location light.	(ON)-OFF-(ON)	

CHANGE-OVER SWITCHES				
Part Number	Symbol	Description	Function	
6FH 007 832-051		Without location light, without pilot light.		0 1 7
6FH 007 832-061	LOCATION	Suitable for use with location light.	ON-ON	5 10
	PILOT	Cuitable for use with leasting light		1 7 2 8 10
6FH 007 832-101	LOCATION	Suitable for use with location light and pilot light.		5 6 9
6FH 007 832-161		Without location light, without pilot light.	ON-OFF-ON	1011 1 7 2 8
	PILOT	Suitable for use with location light		1 5 9
6RH 007 832-351	LOCATION	and pilot light.		3 10
	PILOT	Suitable for use with location light	-	1 3 2 4 9
6RH 007 832-377	LOCATION	and pilot light.		5 6 10
6RH 007 832-381		Without location light, without pilot light.	- OFF-ON-ON	2 6 1 5
6RH 007 832-391	LOCATION	Max. load 16A @ 12V, 8A @ 24V. Suitable for use with location light, without pilot light.	UFF-UN-UN	3 7 10
6RH 007 832-441	LOCATION	Suitable for use with location light.		2 10
6RH 007 832-461	LOCATION	Suitable for use with location light.		3 2 10
6RH 007 832-411	LOCATION	Suitable for use with location light.	OFF-ON- MOMENTARY ON	11 1 0 4 2 7 9 5 10
6HH 007 832-281	PILOT	Max. load 10A @ 12V and 24V. Without location light. Includes pre-fitted 12V bulb. Hazard flasher switch.	UAZAPD	0 2 8 3 6 1 5 10
(1111.007.000.001	PILOT	With location light and pilot light.	HAZARD	2 8 3 10 1 0 19 19 23 × 1
6HH 007 832-301	LOCATION	Includes pre-fitted 24V bulb. Hazard flasher switch.		4 63 1 7






See page 236 for the range of coloured symbols.


CESSORIES

Accessories for Switches in Model Range 007 832-...






Part Number	MOUNTING PANELS		
	8HG 713 626-001 (156.1 x 48.2mm)	SIX SWITCHES	
	8HG 714 504-001 (77.6 x 48.2mm)	THREE SWITCHES	



- 26 -



P/N 8HG 716 734-001

P/N 8HG 716 735-001

Part Number	MODULAR MOUNTING-PANEL SYSTEM		
	8HG 716 734-001	END PIECE	
	8HG 716 735-001	MIDDLE PIECE	

Two end pieces are required to make a mounting panel.

By adding middle pieces, this panel can be extended as required.



P/N 8HG 716 734-001



P/N 8HG 716 735-001



Part Number		BLANKING PLUG FOR EMPTY SWITCH APERTURES
	Part Number	9HB 713 629-001



	WARNING LIGHTS			
Part Number	2AA 713 628-021		12 VOLT	
Part Number	2AA 713 628-031		24 VOLT	
	2AA 713 628-04	41 (LED)	12/24 VOLT	
Bulbs to Suit	12V 24V	W121.2 W241.2		





Side view



	WARNING LIGHTS			
Part Number	9FF 713 627-001		12 VOLT	
Part Number	9FF 713 627-011		24 VOLT	
	9FF 713 627-03	1 (LED)	12/24 VOLT	
Bulbs to Suit	12V 24V	W121.2 W241.2		





9FF 713 627-011 9FF 713 627-031 (LED)

	CONNECTORS	
Dout November	8JA 713 631-001 (For switch)	8 POLE
Part Number	8JA 715 600-001 (For bulb holder)	2 POLE
	8573 (For connectors - Pack of 100)	BRASS TERMINALS




P/N 8JA 713 631-001





SYMBOL CARDS FOR SWITCHES 007 832					
Part Number	Symbol	Symbol Card	Part Number	Symbol	Symbol Card
PXT 713 630-001	Green	Without symbol	9XT 714 300-201	- +	Battery
9XT 713 630-011	Black	Without symbol	9XT 714 300-191	~ 	Temperature
9XT 713 630-021	Red	Without symbol	9XT 713 630-181	4	Window lift
XT 713 630-031	Yellow	Without symbol	9XT 713 630-101	P	Windscreen
XT 713 630-301	∌D	Light	9XT 713 630-121	\$	Window wiper/wash
XT 714 300-131	≣D	Main beam	9XT 713 630-131	1	Windscreen wash
XT 713 630-351	却	Fog lamp	9XT 713 630-231	[};}	Heated rear window
9XT 713 630-421	₽D	Work lamp front	9XT 713 630-481	4	Heated outside mirror
9XT 713 630-701	Q\$	Work lamp rear	9XT 713 630-521	⊘ ⊭	Defroster
9XT 714 300-141	\$\$	Flasher lamp	9XT 713 630-461		Air horn
9XT 713 630-391		Warning lamp	9XT 713 630-291	₩	Fresh air
9XT 713 630-511	公	Map lamp	9XT 713 630-681	*	Roof fan
9XT 713 630-491	恋	Driving compartment lighting	9XT 713 630-201	000	Heater
PXT 713 630-641	φ,⊡	Boot lighting	9XT 713 630-221	%	Heater fan
PXT 713 630-261	- <u>\</u> \\\-	Main light	9XT 713 630-401	\$	Fast
PXT 713 630-371	<i>jiii</i>	Work light	9XT 713 630-691		Slow
XT 713 630-281	Ĭ.	Rotating beacon	9XT 713 630-551	1	Front door
PXT 713 630-711	Ĭ.	Rotating beacon	9XT 713 630-561	2	Rear door
PXT 714 300-181	ميّے،	Lubrication	9XT 713 630-621		Lower
XT 714 300-011	(P)	Parking brake	9XT 714 300-051		Change-over tanks
nterior Lighting			Fan		
PXT 713 630-271	以次	High	9XT 713 630-251		Fast
PXT 714 300-031	<u>₹</u>	Medium	9XT 713 630-531		Slow
9XT 713 630-501	\sim	Low	/// / / 3 030-33	♦	JIOYV

with LED Ring - Off-On



	12 VOLT	24 VOLT		
Part Number	8HG 958 455-001	8HG 958 455-101		RED
	8HG 958 455-011	8HG 958 455-111		BLUE
Mounting	19mm diameter opening.			
Maximum Load	5A			
Protection	IP 67 (Protection against dust and temporary water immersion)			
For Panels	Up to 10mm thick.			



Stainless Steel Latching Switch

Exterior durable, 304 stainless steel switches featuring a ring of LED light. These through panel mount switches are ideal for switching lighting or installing into custom switch panels. The light rings may be wired to show power to a system or signal circuit activation.



P/N 8HG 958 455-011

Stainless Steel Momentary Switch with LED Ring - Off-(On)

Exterior durable, 304 stainless steel switches featuring a ring of LED light. These through panel mount switches are ideal for switching lighting or installing into custom switch panels. The light rings may be wired to show power to a system or signal circuit activation.



→ 1 1 Max	
22 M19x1	25

	12 VOLT	24 VOLT		
Part Number	8HG 958 455-201	8HG 958 455-301		RED
	8HG 958 455-211	8HG 958 455-311		BLUE
Mounting	19mm diameter opening.			
Maximum Load	5A			
Protection	IP 67 (Protection against dust and temporary water immersion)			
For Panels	Up to 10mm thick.			



P/N 8HG 958 455-211

Stainless Steel Buzzer with LED Ring

Exterior durable, 304 stainless steel warning buzzer to match stainless steel switches (above). Also feature a ring of LED light.





Momentary Spring Return Switch - Off-(On)

Off-momentary on push button (spring return).








Part Number	4507	OFF-(ON)
Mounting	12mm diameter opening.	
For Panels	Up to 4mm thick.	
Maximum Load	6A @ 12V	

Momentary Spring Return Push Button Starter Switch - Off-(On)

Brass construction. Chrome plated face nut and button. Off-momentary on push button (spring return).









Part Number	2763	OFF-(ON)
Mounting	16mm diameter opening.	
For Panels	Up to 25mm thick.	
Maximum Load	20A @ 12V 10A @ 24V	


Foot Operated Dipper Switch

Push on terminals. Latching spring return mechanism.










Part Number	4100	ON-ON
Mounting	Surface mount.	
Maximum Load	12A @ 12V 6A @ 24V	






Part Number	4501	OFF-(ON)
Mounting	22mm diameter opening.	
For Panels	Up to 6mm thick.	
Maximum Load	16A @ 12V 8A @ 24V	

Momentary Spring Return Push Button Switch - Off-(On)

Off-momentary on push button (Spring return) switch.






Part Number	4503	OFF-(ON)	
Mounting	23mm diameter opening.		
For Panels	Up to 2mm thick.		
Maximum Load	16A @ 12V 8A @ 24V		
Do not remove rubber cap/front face nut when fitting.			

Momentary Spring Return Push Button Switch - Off-(On)

Water resistant push button type switch with rubber cap. Off-momentary on push button (spring return).





Part Number	4506	OFF-(ON)
Mounting	16mm diameter opening.	
For Panels	Up to 10mm thick.	
Maximum Load	60A @ 12V 40A @ 24V	

Momentary Spring Return Push Button Switch - Off-(On)

Water resistant starter switch.


Off-momentary on push button (spring return).



Brass Switch - Off-On

Chrome knob and face nut. Brass construction.







Part Number	2761	OFF-ON
Mounting	10mm diameter opening.	
For Panels	Up to 25mm thick.	
Maximum Load	10A @ 12V 5A @ 24V	

Illuminated Switch - Off-On

Knob incorporates red or green pilot lamp.










Part Number	4411	GREEN
	4412	RED
Mounting	14mm diameter opening.	
For Panels	Up to 6mm thick.	
Maximum Load	10A @ 12V 5A @ 24V	
Bulb to Suit	12V W121.2 24V W241.2	


Hazard Warning Switch

For cars, trucks, buses with and without trailers. Black plastic mounting panel. Red knob with pilot lamp. Includes 8 pole multiple adaptor. Push-on 6mm terminals supplied. Wiring diagram and instructions are included.












Part Number	5227	OFF-ON	
Mounting	29mm diameter opening.		
Maximum Load	7A @12V		
For Panels	Up to 3mm thick.		
Bulbs to Suit	12V J122 24V J243		






Part Number	2687	2 X OFF-ON
Voltage	Multivolt™, suitable for 12 and 24 volt systems.	
Housing	Impact resistant plastic.	
Maximum Load	20A @ 12V	

Micro Switch Panel - LED Backlight

Micro switch panel modules can be added together horizontally or vertically giving numerous installation options. Each module also has red and green LED backlighting. Circular labels allow vertical, horizontal, left or right mounting.






Compact Switch Panel

Splash proof switch panel protected with neoprene rubber boots. Inline fuse holders with fuses behind panel.



Part Number	2690 (4 way)	OFF ON	
	2691 (6 way)		
Housing	Impact resistant plastic.		
Switches	4 or 6 off-on toggle switches.		
Maximum Load	20A @ 12V		



Switch Panel, LED Backlight

Splash proof switch panel featuring LED backlit labels. Protected by neoprene rubber boots. Removable cover plate over switches conceals screws.





Part Number	2692 (6 way)	OFF-ON
Voltage	Multivolt [™] , suitable for 12 and 24 volt systems.	
Housing	Impact resistant plastic.	
Switches	6 off-on toggle switches.	
Maximum Load	20A @ 12V	

Battery Master Switch

Suitable for cars and medium sized trucks. Complete with removable key. For interrupting circuits (prevents theft and short circuit).







Part Number	4650		OFF-ON	
Mounting	22mm diameter op	pening		
Maximum Load	12V 24V	1000A for up to 10 seconds. 500A for up to 10 seconds.		
Maximum Continuous Load	12/24V - 50A at a r connected with ring	naximum ambient temperature of 80°C with 39 g-type terminals.	5mm² lead,	
Termination	2 x M10 studs.			
Spare Part	4652	Spare key		
Switch not designed for Marine applications.				

Battery Master Switch

Suitable for cars and medium sized trucks. Complete with removable key.








Part Number	4640		OFF-ON
Mounting	Recess or surface	mount.	
Maximum Load	12/24V	1250A for up to 10 seconds	
Maximum Continuous Load	12/24V	275A	
Termination	2 x M10 studs.		
Spare Part	4641	Spare key	

Battery Master Switch

Suitable for cars and medium sized trucks, with a continuous rating of 250 amps.


Provides effective protection against theft and fire in case of accidents. With sealing cap when not in use which doubles as a key holder.







Part Number	4649		OFF-ON	
Mounting	22mm diameter o	22mm diameter opening.		
Maximum Load	24V	2000A for 5 seconds		
Maximum Continuous Load	12/24V	250A		
Termination	2 x M10 studs.			
Protection	IP 65 (Protection a	against dust and water jets)		




Part Number	4648		OFF-ON
Mounting	21mm diameter opening.		
Maximum Load	24V	2500A for 10 seconds	
Maximum Continuous Load	12/24V	500A	
Termination	2 x M10 studs.		
Protection	IP 65 (Protection against dust and water jets)		

High Capacity Battery Master Switch

Suitable for trucks and other commercial machinery, with a high continuous rating of 500 amps. Provides effective protection against theft and fire in case of accidents. With sealing cap when not in use which doubles as a key holder.






		02 21	21 12 10	
Part Number	4653		OFF-ON	
Mounting	22mm diamete	r opening.		
Maximum Load	12V 24V	5000A for 10 seconds 2500A for 10 seconds		
Maximum Continuous Load	12/24V	12/24V 100A continuous at a maximum ambient temperature of 60°C with 50mm² lead connected with ring-type terminals.		
Termination	2 x M10 studs.			
Protection	IP X4 (Protectio	IP X4 (Protection against water splashing)		
Spare Part	4654	Spare key		
Switch not designed for	r Marine application	ns.		

Heavy Duty Battery Master Switch

For trucks, buses and earth moving equipment. Complete with removable key.





Part Number	4658		OFF-ON
Mounting	22mm diameter opening.		
Maximum Load	24V	2 x 2500A for 10 seconds	
Maximum Continuous Load	24V	2 x 500A	
Termination	2 x M10 / 2 x M8 studs.		
Protection	IP 67		

Battery Master Switch - Dual Circuit

The dual circuit battery switch can be either used to cut off two independent battery supplies at once or to interrupt the power and earth circuits together for total isolation.



Battery Master Switch - Threaded Collar

Battery master switch with threaded collar. Suitable for cars and medium sized trucks. Complete with removable key, labelled handle and removable back cover. For interrupting circuits (prevents theft and short circuit).










Part Number	4722	OFF-ON
Mounting	Recess or surfa	ace mount. 24mm diameter opening.
Maximum Load	12/24V	1250A for up to 10 seconds.
Maximum Continuous Load	12/24V	275A
Termination	2 x 10mm stud	ls.
Protection	IP 56 (Protection	on against solid foreign objects up to 1mm and powerful water jets)

Remote Operated Battery Master Switch

Battery switch with tin-plated copper studs and nuts. Can be operated manually or remotely with a separate switch (not supplied). Suitable for mounting alongside battery reducing cable lengths to starter motor. Complete with removable key and 3 way DTM plug.









Part Number	4724		OFF-ON
Mounting	Recess or surface i	mount. 53mm diameter opening.	
Voltage	12/24V		
Power Consumption	2W @ 12V when op	erating, 0.25W static.	
Maximum Load	12/24V	1250A for up to 10 seconds.	
Maximum Continuous Load	12/24V	275A	
Termination	2 x 10mm studs.		
Cable Length	500mm		

Heavy Duty Battery Master Switch


For commercial use. Features sliding contact for self cleaning.







Part Number	4720	OFF-ON
Mounting	Recess or surface	e mount. 85mm diameter opening.
Maximum Load	12/24V	2500A for up to 10 seconds.
Maximum Continuous Load	12/24V	600A
Termination	2 x 12mm studs.	
Protection	IP 56 (Protection	against solid foreign objects up to 1mm and powerful water jets)



Part Number	4723		OFF-B1-B0TH-B2
Mounting	Recess or surface	mount.	
Maximum Load	12/24V	1000A for up to 10 seconds.	
Maximum Continuous Load	12/24V	200A	
Termination	3 x 5/16" studs.		
Protection	IP 56 (Protection a	gainst solid foreign objects up to 1mm and pow	erful water jets)

Battery Selector Switch

Battery switch to select either from two power sources or combine together. Will also isolate from the power sources.








Battery Selector Switch

Battery switch to select either from two power sources or combine together. Will also isolate from the power sources.

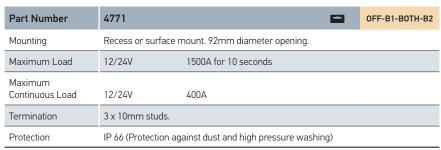




Diesel Pre-heating Starter Switch

Pre-heating starter switch supplied with two keys. Key removes in park and off.











Part Number	4005
Mounting	27mm diameter opening.
For Panels	Up to 3.5mm thick.
Function	5 position switch (park, off, driving, pre-heat, start).

TERMINAL	POSITION	FUNCTION	CURRENT @ 24V
30-58	Р	Park Lamps	4A
30-15/54	1	Driving	18A
30-19	2	Preheat	35A
30-50a/17	3	Start	5A/35A

Ignition and Starter Switch

Switch with spring loaded return. Supplied with two keys.






Part Number	4008
Mounting	19mm diameter opening.
For Panels	Up to 19mm thick.
Maximum Load	@12V ignition 25A, start 12A, accessory 15A.
Spare Part	Blank key number Silica BH4.
Function	Four position switch (accessory, off, ignition, start).


Heavy Duty Ignition and Starter Switch

Heavy duty ignition and starter switch, featuring plastic outer construction for maximum protection against damage. Supplied with two keys.





Part Number	4008HD
Mounting	19mm diameter opening.
For Panels	Up to 10mm thick.
Maximum Load	@12V park 20A, ignition 20A, start 25A.
Function	Four position switch (park, off, ignition, start). Key removes in park and off.




Part Number	4009		22MM SHAFT
Part Number	4010		18MM SHAFT
Mounting	4009 4010	22.5mm diameter opening 18.5mm diameter opening	
For Panels	Up to 19mm thick.		
Maximum Load	@12V ignition 25A, start 50A, accessory 20A.		
Function	Four position switch	h (accessory, off, ignition, start).	

0-10-


Ignition and Starter Switch

Two keys supplied. Start-lockout mechanism to prevent accidental engagement of starter.









Part Number	2766
Mounting	21mm diameter opening.
For Panels	Up to 25mm thick.
Maximum Load	@12V ignition 5A, start 5A, accessory 10A.
Function	Four position switch (accessory, off, ignition and start)

Ignition and Starter Switch


Four position switch with spring loaded return. Four screw terminals.



Stop Lamp Switch - Off-On

Normally open, contacts are closed when tension is applied to the spring. Complete with splash proof rubber cap. Brake linkage clamp 6mm diameter.






Part Number	4560	OFF-ON
Maximum Load	10A @ 12V 5A @ 24V	

Stop Lamp Switch - On-Off


Thread M10 x 1.25. Suits most Japanese vehicles.







ACCESSORIES




Part Number	4550	ON-OFF
Mounting	21mm diameter opening.	
Maximum Load	2A @ 12V 1A @ 24V	

Door Contact Switch - On-Off

Switch closes circuit if door is opened.






Part Number	4551	OFF-ON
Mounting	21mm diameter opening.	
Maximum Load	2A @ 12V 1A @ 24V	

Door Contact Switch - Off-On

Switch opens circuit if door is opened. May be used as safety cut-off switch.






Part Number	4553	ON-OFF	
Mounting	12mm diameter opening and screw.		
Maximum Load	3.5A @ 12V		
Plunger automatically adjusts to door gap on initial operation.			

Door Contact Switch - On-Off

Switch closes circuit if door is opened. Corrosion proof black plastic. Rubber seal. Push-on terminal.





Part Number	4554	ON-OFF
Mounting	10mm diameter opening and screw.	
Maximum Load	5A @ 12V	

Door Contact Switch - On-Off

Extended arm which may be cut to length to suit opening.




CCESSORIES

Pilot Lamp - 12 Volt

Panel push fit pilot lamp with non-replaceable bulb. See over the next page for function descriptions.








Part Number	2708		RED
	2709		GREEN
Part Number	2710		BLUE
	2711		AMBER
Mounting	12.5mm diameter opening.		
Voltage	12V		
Suitable for 12V only. Bulb not replaceable.			

Pilot Lamp

Pilot lamp utilizing bayonet based bulb for use under heavy duty conditions. See over the next page for function descriptions.












Part Number	2712	RED
	2713	GREEN
	2714	BLUE
	2715	AMBER

Mounting	17mm diameter opening.		
Bulbs to Suit	12V 24V	H122 H242	





LED Pilot Lamp

Heavy duty multi-chip LED pilot lamp featuring shock-resistant one-piece construction for long service life and polycarbonate lens. See below for function descriptions.

	2716	RED	
	2716-24V ==	KLD	
	2717	GREEN	
	2717-24V	GREEN	
Part Number	2718	AMBER	
Part Number	2718-24V	AMBEK	
	2719	WHITE	
	2719-24V	Willie	
	2720	BLUE	
	2720-24V	BLUE	
Mounting	22mm diameter opening.		
For Panels	Up to 38mm thick.		
Voltage	12V or 24V AC/DC		
Protection	IP 65 (Protection against dust and water jets) when installed.		








P/N 2718





P/N 2719 P/N 2720



1	- 12
F 09	Pilot la
	availal

Part Number	2721	RED
	2722	GREEN
Part Number	2723	BLUE
	2724	AMBER
Mounting	8mm diameter opening.	
For Panels	Up to 10mm thick.	
Suitable for 12V only. LED included, not replaceable.		

LED Pilot Lamp, Chrome Body 12 Volt

amp featuring chrome body and available in four colour variants. See below for function descriptions.









P/N 2722

P/N 2723

P/N 2724

RED	Ignition, handbrake and hazard warning lamps
GREEN	Indicator lamps
BLUE	Main beam and auxiliary headlamps
AMBER	Fog lamps

Trailer Connector Wiring Specifications

Cable Entry View









5 Pole Socket


5 Pole Plug

7 Pole Plug 7 Pole Socket

Terminal Number	Connect to
2	Left-hand flasher lamps
3	Earth return
5	Right-hand flasher lamps
6	Stop lamps
7	Rear position, number plate and clearance lamps

5 POLE CONNECTOR WIRING SPECIFICATIONS

Front View





7 Pole Flat Socket

7 Pole Flat Plug

7 POLE CONNECTOR WIRING SPECIFICATIONS		
Terminal Number	Connect to	
1	Left-hand flasher lamps	
2	Reversing lamps	
3	Earth return	
4	Right-hand flasher lamps	
5	Service brakes (or Auxiliary)	
6	Stop lamps	
7	Rear position, number plate and clearance lamps	
Where service brakes are not fitted, terminal no.5 may be used for auxiliaries.		

Trailer Plug Holder

Minimises potential damage to plug, to suit P/Ns 4902 and 4911.



Part Number	8000
Mounting	Simple screw mounting on caravan/trailer drawbar or any convenient location.

Trailer Socket Bracket

Zinc plated steel. To suit P/Ns 4901 and 4912.




Part Number

8022

ACCESSORIES

7 Pole Plastic Socket

Black plastic socket with removable contact set. P/N 4901X with disconnecting contact for rear fog or rear parking sensors.

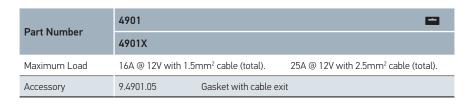





Part Number	4902	
Maximum Load	16A @ 12V with 1.5mm² cable (total).	25A @ 12V with 2.5mm² cable (total).

7 Pole Plastic Plug

Black plastic plug with strain relief.



Part Number	4909		
Maximum Load	16A @ 12V with 1.5mm² cable (total).	25A @ 12V with 2.5mm² cable (total).	

7 Pole Plastic Socket

Simply stores in boot until required.
Requires no permanent bumper mounting.



I	Part Number	4911		
		4911-BULK		PACK OF 25
	Maximum Load	16A @ 12V with 1.5mm² cable (total).	2V with 1.5mm² cable (total). 25A @ 12V with 2.5mm² cable	

7 Pole Metal Plug

Solid metal plug with cable strain relief.



Part Number	4912		
Part Number	4912-BULK		PACK OF 25
Maximum Load	16A @ 12V with 1.5mm² cable (total).	25A @ 12V with 2.5mm² cable (tota	

7 Pole Metal Socket

Solid metal socket with removable contact set.



Part Number	8KA 004 797-021
Material	Polyurethane with alloy plugs
Cable	6 x 1.0mm² + 1 x 1.5mm²
Cable Length	Up to 4.0m
Compliance	ISO 1724 / ISO 6722

7 Pole Round 12V Spiral Cable



7 Pole Flat Socket

Impact resistant, UV stabilised plastic spring loaded lid. Nickel plated contacts for excellent electrical performance.



Part Number	4920	
Part Number	4920-BULK	PACK OF 50
Maximum Load	20A @ 12V (total) 10A @ 24V (total)	

7 Pole Flat Plug

Impact resistant, UV stabilised plastic. Nickel plated contacts for excellent electrical performance.



Part Number	4921	
Part Number	4921-BULK	PACK OF 50
Maximum Load	20A @ 12V (total) 10A @ 24V (total)	

Flat Trailer Plug Holder

Flat plug holder to suit P/N 4921.



Part Number	8009	
	8009-BULK	PACK OF 20

5/7 Pole ABS Socket

Made of black fibreglass reinforced nylon.

Part Number	8JB 007 645-021		CRIMP
	8JB 007 645-031		SCREW
Mounting	54mm diameter opening.		
Maximum Load	25A @ 24V (total)		
Cable	Suitable for cable 9 - 16mm in diameter.		
Spare Parts	9MK 726 762-831	Crimp contact set – 5 x 1.5mm², 2 x 4.0mm², 2 x 6.0mm², 2 x Blanks.	



5/7 Pole ABS Plug

Made of black fibreglass reinforced nylon.





Plug-in Socket Tester - 24V

Designed for testing ABS sockets.



Part Number	8PD 004 508-031

Part Number 8KA 007 648-001 (ABS) 5 PIN 8KA 007 648-021 (EBS) 7 PIN Cable 5 Pin 7 Pin 3 x 1.5mm² + 2 x 4.0mm² 5 x 1.5mm² + 2 x 4.0mm² Cable Length Up to 4.0m

ABS/EBS Spiral Cable - 24 Volt

Spirally coiled cable with 2 plugs and guard grommets. Extremely resistant to high and low temperatures as well as weathering. High resistance to oils and chemicals. Made to withstand repeated bending.



7 Pole Heavy Duty Metal Socket with Screw Terminals



Part Number	4907	SOCKET
Maximum Load	15A @ 24V with 1.5mm² cable (total) 20A @ 24V with 2.5mm² cable (total)	
Cable	Suitable for cable 9.5 - 12.5mm in diameter.	
Compliance	ISO 1185	


7 Pole Heavy Duty Metal Plug with Screw Terminals



Part Number	4908	PLUG
Maximum Load	15A @ 24V with 1.5mm² cable (total) 20A @ 24V with 2.5mm² cable (total)	
Cable	Suitable for cable 9.5 - 12.5mm in diameter.	
Compliance	ISO 1185	

7 Pole EBS Socket with Screw Terminals - 12 Volt






Part Number	8JB 011 895-001	SOCKET
Outer Cable Diameter	Suitable for cable diameter measuring 9 - 16mm	
Max. Cable Size	Up to 6mm² per pole	
Compliance	ISO 7638-2	



7 pole configuration

7 Pole EBS Plug with Screw Terminals - 12 Volt





Part Number	8JA 011 896-001	PLUG
Outer Cable Diameter	Suitable for cable diameter measuring 11 - 13mm	
Max. Cable Size	Up to 6mm² per pole	
Compliance	ISO 7638-2	

ACCESSORIES

13 Pole (7 + 6) WeST Socket



Part Number	8JB 005 949-031	SOCKET
Maximum Load	15A @ 12V with 1.5mm² cable (Total)	
Compliance	ISO 11446	
Note: Can be used with standard 7 pole plugs.		

13 Pole (7 + 6) WeST Plug

Part Number	8JA 005 951-061 PLUG	
Maximum Load	15A @ 12V with 1.5mm² cable (Total)	
Cable	Suitable for 11.5 - 14.0 mm in diameter.	
Compliance	ISO 11446	



13 Pole Socket



Part Number	8JB 005 949-001	SOCKET
Maximum Load	16A @ 24V with 1.5mm² cable (total) 25A @ 24V with 2.5mm² cable (total)	
Compliance	ISO 11446	

13 Pole Plug



Part Number	8JA 005 951-001	PLUG
Maximum Load	16A @ 24V with 1.5mm² cable (total) 25A @ 24V with 2.5mm² cable (total)	
Compliance	ISO 11446	

13 Pole to 7 Pole Adaptors

Adaptors for connecting a 13 pole vehicle socket with a 7 pole trailer plug.



Part Number	8JA 005 952-001
Maximum Load	16A @ 12V (total)
To suit late model vehicles with 13 pole plugs to standard round 7 pole, 250mm long.	



Part Number	8JA 008 969-001
Maximum Load	16A @ 12V (total)
To suit late model vehicles with 13 pole plugs to standard round 7 pole.	



Part Number	8JA 005 952-005
Maximum Load	16A @ 12V (total)
To suit late model vehicl	es with 13 pole plugs to standard flat 7 pole, 250mm long.

290

15 Pole Plastic Plug

Plastic plug with rubber gasket and nickel-plated pins. Featuring fibre glass reinforced polyamide housing and mechanical strain relief. Secure arrest with rust resistant metal bail (ISO 12 098).

Part Number	8JA 007 241-021	SCREW
rai (Nullibei	8JA 007 241-031	CRIMP
Maximum Load	16A @ 24V with 1.5mm² cable (total) 25A @ 24V with 2.5mm² cable (total)	
Cable	Suitable for cable diameter measuring 12 - 18mm.	



Part Number 8JB 007 242-011 SCREW 8JB 007 242-021 CRIMP

Maximum Load 16A @ 24V with 1.5mm² cable (total) 25A @ 24V with 2.5mm² cable (total)

Cable Suitable for cable diameter measuring 12 - 18mm.

15 Pole Plastic Socket

Plastic socket with lid, rubber gasket and nickel-plated pins. Featuring fibre glass reinforced polyamide housing. PC gland for cable exit.



15 Pole Spiral Cable - 24 Volt

Spirally coiled cable with 2 plugs and guard grommets. Extremely resistant to high and low temperatures as well as weathering. Maximum resistance to oils and chemicals. Made to withstand repeated bending.






Parking Socket for EBS Plugs

Part Number	8HG 007 647-001
Mounting	54mm diameter opening



2 Pole Plug






Part Number	4914	PLUG
Maximum Load	16A @ 12V 8A @ 24V	
Sockets to Suit	P/Ns 4915, 4916, 4917 and 4918.	

2 Pole Socket with Cover






Part Number	4915	SOCKET
Mounting	19mm diameter opening.	
Maximum Load	16A @ 12V 8A @ 24V	

2 Pole Socket with Cover - Insulated Earth






Part Number	4916	SOCKET
Mounting	19mm diameter opening.	
Maximum Load	16A @ 12V 8A @ 24V	

2 Pole Surface Mount Socket







Part Number	4917	SOCKET
Mounting	Surface mount.	
Maximum Load	16A @ 12V 8A @ 24V	

2 Pole Socket with Metal Earth Tab and Cover





Part Number	4918	SOCKET
Mounting	22mm diameter opening.	
Maximum Load	16A @ 12V 8A @ 24V	




Part Number	4950	PLUG
Maximum Load	8A @ 12V 4A @ 24V	
Socket to Suit	4943-R	

2 Pole Power Plug

Suitable for standard cigarette sockets.






Part Number	4952	PLUG
Maximum Load	8A @ 12V	
Sockets to Suit	P/Ns 4915, 4916, 4917, 4918 and 4943-R.	

2 Pole Fused Power/DIN Plug

Combination lighter/DIN 2 pole plug with in-built 8A ceramic type fuse suitable for both cigarette lighter and DIN ISO 4165 sockets (standard 2 pole sockets).





Part Number	4943-R	SOCKET
Maximum Load	15A @ 12V	

2 Pole Power Socket

2 pole lighter size power socket with protective cover for connection of a variety of electrical accessories.





Part Number	4939	SOCKET
Maximum Load	10A @ 12V	

2 Pole Power Socket - Twin DIN Output

Twin Power Socket featuring two DIN 1465 output sockets for connection of accessories. Plugs into standard vehicle cigarette lighter sockets. Primary lighter plug connection features a removable extension piece allowing the unit to also plug into DIN 2 pole sockets if required.





Super Tone Horn - Set of 2

Traffic blaster, generates a penetrating strong tone. Robust housing in a first-class design with striking grille. P/N 6037 also suitable for off-road use.



P/N 6036





	6036 (2 Horns)		•	12 VOLT
Part Number	6037 (2 Horns)		•	12 VOLI
	6037-24V (2 Horns))	•	24 VOLT
Power Consumption	6036 6037 6037-24V	66W x 2 78W x 2 84W x 2		
Frequency	P/N 6036 P/N 6037/6037-24V	300/500Hz 375/500Hz		
Sound Level	118dB			



P/N 6037 Rear view




6036 Packaging

6037/...-24V Packaging

Twin Tone Scroll Horn - Set of 2



Packaging



Part Number	6004 (2 Horns)		•	12 VOLT
Power Consumption	72W x 2			
Voltage	12V			
Frequency	High Tone Low Tone	500Hz 400Hz		
Sound Level	Combined 110dB @ 2	.0m		
·	<u> </u>			· · · · · · · · · · · · · · · · · · ·


Twin Tone Scroll Horn - Set of 2


Galvanised metal housing and plastic trumpet. Safe from corrosion.





Packaging





Part Number	6005 (2 Horns	;)	-	12 VOLT
Power Consumption	72W x 2			
Voltage	12V			
Frequency	High Tone Low Tone	500Hz 400Hz		
Sound Level	Combined 110dl	B @ 2.0m		

Low and High Tone Disc Horns


Single bolt mount. 92mm diameter.

	LOW TONE		HIGH TONE		
Part Number	6001		6003		12 VOLT
	6002		6020		24 VOLT
Power Consumption	72W				
Frequency	Low tone High tone	335Hz 435Hz			
Sound Level	110dB @ 2.0m				






ACCESSORIES




S70 Compact Horn

Single bolt mount.

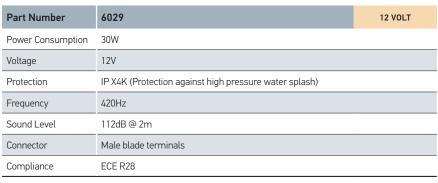







	I 	— 108 — -	67
Part Number	6028 (2 Horns)	-	12 VOLT
Power Consumption	30W		
Voltage	12V		
Protection	IP X4K (Protection against high pressure water spla	ash)	
Frequency	420Hz		
Sound Level	112dB @ 2m		
Connector	Male blade terminals		
Compliance	ECE R28		

Sharp Tone Horn Set - M26S - Set of 2

Single bolt mount.



Packaging


Dual Trumpet Air Horn Kit

Installation accessories included.





Blister packaging




Part Number	6014	12 VOLT
Part Number	6027	24 VOLT
Mounting	Installation accessories included.	
Current Draw	20A @ 12V 10A @ 24V	
Frequency	840/795Hz	
Sound Level	117dB	
Operating Pressure	110Kpa (16psi)	·

Compressed Air Operated Horn

Ideal for trucks and buses. Grey shock-proof and corrosion resistant trumpet. This horn is designed to operate directly from the truck's air supply via the existing horn-button or separate switch.





Part Number	6025	12 VOLT		
	6026	24 VOLT		
Power Consumption	36W @ 12V, 48W @ 24V			
Frequency	400Hz			
Sound Level	118dB (at 2.0m)	_		
Operating Pressure	620-860Pa (90 - 125psi)			
Air Tube: 10mm internal diameter.				


Multivolt™ Reversing Alarm and Signal Horn

Heavy duty reversing alarm with integrated, dual-tone signal horn. Reverse polarity and transient voltage spike protection.






P/N 6041







Part Number	6012		12-24 VOLT
Mounting	Integrated universa	l mounting bracket for upright, pendant or s	urface mounting.
Current Draw	0.3A		
Frequency	Back-up alarm High Tone Low Tone	100 - 1500Hz 1000 - 1500Hz 80Hz (+/- 37%)	
Sound Level	102 +/- 4dB at 1.2m	۱	
Temperature Range	-40°C to +85°C		
Protection	IP 66 (Protection ag	ainst dust and high pressure washing)	
Spare Part	6041	Activating switch	
Compliance	SAE J994 Type F		




Part Number	6021		12 VOLT
Part Number	6022		24 VOLT
Power Consumption	6W		
Current Draw	12V 24V	Less than 50mA Less than 25mA	
Sound Level	85dB		

Warning Buzzer

Piercing continuous sound. Suitable for a variety of applications e.g. headlamp, oil, handbrake, indicator, temperature, door close/open, brake fluid, etc.



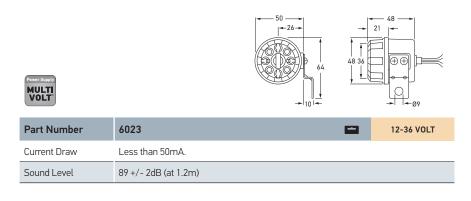

Multivolt™ Reversing Alarm

Durable intermittent reversing alarm. Easily fitted to any car or truck's reversing lamp wiring system or wire to a switch on your dashboard.



Activating Switch

Single direction. Off-on switch. Suits all reversing alarms and buzzers.

Part Number	6041	OFF-ON
Mounting	Adjacent to the gear shift lever or linkage.	
Protection	IP 55 (Protection against dust and water jets)	



Heavy Duty Reversing Alarm

Heavy duty reversing alarm with integral AMP connection and fixed sound pressure levels of 97/107dB @ 1.2 metres. Epoxy encapsulated circuit boards offer protection against humidity, dirt and vibration.





P/N 9.6008.06







Part Number	6009	97dB	
Part Number	6010	107dB	
Mounting	Integrated universal mounting bracket for upright, pendant or su	urface mounting.	
Voltage	12-24V		
Current Draw	P/N 6009 0.2A P/N 6010 0.3A		
Frequency	60 signals per minute (± 20%).		
Sound Level	P/N 6009 97 ± 4dB @ 1.2m P/N 6010 107 ± 4dB @ 1.2m		
Temperature	Operating range -40°C to 85°C.		
Protection	IP 66 (Protection against dust and high pressure washing)		
Spare Part	9.6008.06 Plug and lead		
Compliance	SAE J994		

Heavy Duty Reversing Alarm


Heavy duty reversing alarm with integral AMP connection. Automatically adjusts sound pressure level to changing noise environments. Solid state electronics, self-adjusting to the minimum of 5dB above surrounding noise levels effectively reducing irritation. Epoxy encapsulated circuit boards offer protection against humidity, dirt and vibration.







P/N 9.6008.06








Part Number	6013	82-102dB
Mounting	Integrated universal mounting bracket for upright, pendant or s	urface mounting.
Voltage	12-24V	
Current Draw	0.4A	
Frequency	60 signals per minute (± 20%).	
Sound Level	82 - 102 ± 4dB @ 1.2m	
Temperature	Operating range -40°C to 85°C.	
Protection	IP 66 (Protection against dust and high pressure washing)	
Spare Part	9.6008.06 Plug and lead	
Compliance	SAE J994	









	6042	87dB
Part Number	6043	97dB
	6044	112dB
Mounting	Universal mounting comes complete with heavy-gauge plated smounting bracket. Can be installed on positive and negative gro	
Voltage	12-48V	
Current Draw	Less than 0.20A	_
Frequency	80 signals per minute +/- 20%	
Sound Level	P/N 6042 87dB @ 1.2m P/N 6043 97dB @ 1.2m P/N 6044 112dB @ 1.2m	
Temperature	Operating range -40°C to 74°C	
Protection	Protection against dust and high pressure washing	
Compliance	SAE J994	

Evacuator Plus Heavy Duty Reversing Alarm

The Evacuator Plus heavy duty reversing and warning alarm features a lightweight piezoelectric output circuit.

The housing is constructed of high impact ABS plastic resin and is environmentally sealed against moisture, dust and corrosion. Evacuator Plus reversing and warning alarms are steam cleanable.







P/N 6043

P/N 6044



Part Number	6050-SA	77-97dB
Mounting	Integrated universal mounting bracket for upright, pendant or s	urface mounting.
Voltage	12-24V	
Current Draw	Less than 1A.	
Frequency	White noise/broadband.	
Sound Level	77-97 ± 4dB @ 1.2m	
Temperature	Operating range -40 to 85°C.	
Protection	IP 68 (Protection against dust and water immersion)	
Compliance	SAE J994 (€	

Broadband Reversing Alarm

Reversing alarm with multi-frequency broadband sound.





Part Number	6051	92dB
	6052	97dB
Mounting	Integrated universal mounting bracket for upright, pendant or	surface mounting.
Voltage	12-24V	
Current Draw	Max. 0.5A	
Frequency	White noise/broadband.	
Sound Level	P/N 6051 92 ± 4dB @ 1.2m P/N 6052 97 ± 4dB @ 1.2m	
Other specifications as	P/N 6050-SA	

Broadband Reversing Alarm

Reversing alarm with multi-frequency broadband sound.




Reversing Alarm

Reactor heavy duty reversing and warning alarm automatically adjusts to changing noise environments. State-of-the-art, solid-state electronics self-adjust to a minimum of 5dB above surrounding noise levels, thus reducing irritation, complaints and hearing impairment.

Reactor alarms feature integral universal mounting brackets and high impact ABS plastic resin housing and are totally environmentally sealed in epoxy to guard against moisture, dirt and vibration.









Part Number	6047	82-107dB AUTO
Mounting	Universal mounting brackets.	
Voltage	12-48V	
Current draw	Less than 0.25A	
Frequency	80 signals per minute.	
Sound level	82 to 107dB @ 1.2m	
Temperature	-40°C to 77°C	
Protection	IP 55 (Protection against dust and water jets)	
Compliance	SAE J994	

Reversing Alarm

Durable intermittent reversing alarm. Easily fitted to any car or truck's reversing lamp wiring system or wire to a switch on your dashboard.





Part Number	6048	87-112dB AUTO
Mounting	Universal mounting brackets.	
Voltage	12-24V	
Current draw	Less than 0.50A	
Frequency	80 signals per minute.	
Sound level	87 to 112dB @ 1.2m	
Temperature	-40°C to 77°C	
Protection	IP 55 (Protection against dust and water jets)	
Compliance	SAE J994	

Reversing Alarm

Durable intermittent reversing alarm. Easily fitted to any car or truck's reversing lamp wiring system or wire to a switch on your dashboard.






Part Number	6049	107/112dB MANUAL
Mounting	Universal mounting brackets.	
Voltage	12-24V	
Current draw	Less than 0.8A	
Frequency	80 signals per minute.	
Sound level	107 or 112dB @ 1.2m	
Temperature	-40°C to 77°C	
Protection	IP 55 (Protection against dust and water jets)	
Compliance	SAE J994	
Reactor alarms comply with SAE J994 requirements and OSHA regulations.		

Part Number	8TG 009 428-087
Operating Temperature Range	– 40 °C + 100 °C (< 20 min. up to + 120 °C)
Voltage	10.5 - 16V DC
Maximum Vacuum Level	≥ 86% (Below ambient pressure level)
Pressure build-up time at 100 hPa ambient pressure, 12V	$p_{abs} = 500$ mbar in $t \le 6$ sec $p_{abs} = 300$ mbar in $t \le 12$ sec
Test volume	Approx. 3.2 l
Pump Operating Time	> 600 hours
Switching Operations	> 450,000

OPERATION DIAGRAM

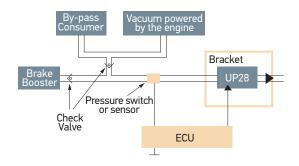

Vacuum Pump UP28

The UP28 vacuum pump can be triggered on demand to support the brake booster. If the combustion engine does not supply sufficient vacuum under certain operating conditions, i.e. cold start/warming up phase, the UP28 supplies the vacuum to ensure brake booster operation.

The UP28 is installed parallel to the main combustion engine. The UP28 sucks in filtered air via the brake booster and flexible pipes. To enable accurate pressure measurement by the control unit, non-return pressure valves are installed (see diagram). The electric contact between the UP28 and the control unit is established via a cable equipped with an engine compartment plug attached to the vacuum pump.

The braking system is one of the most important systems in any vehicle. To ensure that a constant and effect brake power is accessible at all times, the use of a vacuum pump is often necessary. Most vehicle brake boosters use a vacuum that is generated by the naturally aspirated engine. Current engine development projects mainly aim to increase the efficiency of drive concepts and further conserve resources. Substantially lower fuel consumption can be achieved by e.g. running the engine as unthrottled as possible, which under certain operating conditions, may result in an insufficient vacuum supply from the combustion engine for brake boost.







Turbo Fan

Turbo fans provide high capacity at low power consumption. Features include impact resistant housing, low-noise operation and soft plastic impellers, shielded by sturdy protective grille for added safety. Fans can be turned in all directions, and locked in position. Airflow can be regulated by two-stage switch.







Part Number	8EV 003 361-002	12 VOLT
	8EV 003 361-022 (White)	12 VULI
	8EV 003 361-012	24 VOLT
Power Consumption	6.5W	
Cable Length	Pre-wired with 140mm of cable.	
Min. Service Life	5000 hours (tested under extreme conditions)	

Circuit Tester

Circuit Tester for quick fault tracing in vehicle electrical systems. Sturdy metal construction with screw-off cap and testing needle.



Part Number	7013
Bulb to suit	24V (M243)
Suits	6, 12 and 24V applications

Anti-Freeze Tester

Professional tester for measuring the freezing point of the water in automobile cooling systems. The new suction system design prevents bubbles from forming and keeps water from flowing back.



Part Number	7037
Measuring Tolerance	Less than +/-1%.

Does not measure Glycol concentration. Measures freezing point depression of Glycol-based coolant.



Part Number CRIMPING TOOL - INSULATED TERMINALS

8271

Specially designed for the handyman and hobbyist, a useful crimping tool that cuts cable, strips cable insulation and crimps all popular insulated terminals.





Part Number CRIMPING TOOL - INSULATED TERMINALS

8272

Spring return hand grips. Cuts and strips insulation from cable measuring 2.5-6mm in diameter (0.75-6mm²). Crimps all popular insulated and non-insulated terminals. Cuts bolts with metric threads M2.6, M3, M3.5, M4, M5.





Part Number CRIMPING TOOL - INSULATED TERMINALS

8273

Adjustable ratchet mechanism and spring release ensures a perfect crimp every time for insulated terminals.





Part Number CRIMPING TOOL - NON-INSULATED TERMINALS

8274

Adjustable ratchet mechanism and spring release ensures a perfect crimp every time for open barrel non-insulated terminals.





Part Number CRIMPING TOOL - DT TERMINALS

8275

Specially designed crimping tool with multiple jaws for an even crimp of DT terminals. See pages 272-273 for DT connectors.





Part Number CRIMPING TOOL - SUPER SEAL TERMINALS

8298

Crimping tool designed for use with super seal connector terminals. See pages 274-275 for super seal connectors.





2 Pole Plug and Socket

Supplied with 4 solid copper crimp contacts and 2 locking wedges. Bulk pack supplied with 2 pole connectors and contacts to suit.



2 POLE PLUG AND SOCKET	
4960	
2 POLE PLUG	
4960MF	PACK OF 10
2 POLE SOCKET	
4960FM	PACK OF 10
2 POLE PLUG KIT	
4960-P	
	4960 2 POLE PLUG 4960MF 2 POLE SOCKET 4960FM 2 POLE PLUG KIT

3 Pole Plug and Socket

Supplied with 6 solid copper crimp contacts and 2 locking wedges.



Part Number 4961

4 Pole Plug and Socket

304

Supplied with 8 solid copper crimp contacts and 2 locking wedges.



Part Number

4962

www.hella.co.nz

ACCESSORIES

6 Pole Plug and Socket

Supplied with 12 solid copper crimp contacts and 2 locking wedges.





8 Pole Plug and Socket

Supplied with 16 solid copper crimp contacts and 2 locking wedges.

Part Number	4964
-------------	------



12 Pole Plug and Socket

Supplied with 24 solid copper crimp contacts and 2 locking wedges.

Part Number 4965



Part Number

CRIMPING TOOL - DT TERMINALS

8275

Specially designed crimping tool with multiple jaws for an even crimp of DT terminals. See pages 306-307 for DT connectors.





Crimp centred between the inspection hole and crimp barrel end.

Visual Inspection Checklist

- √ NO damaged wire strands.
- √ N0 missing wire strands.
- ✓ ALL strands entered into contact barrel.

Super Seal Connectors

Super seal connector housings were developed to satisfy increasing requirements for safety and reliability in the field of electrical connections. The connectors can be connected to existing components and used with the equipment presently in use in the automotive industry (sensors, oil pressure sensors, water temperature monitoring circuits, etc.).

- → IP 67 (Protection against dust and temporary water immersion)
- → Robust and reliable contact. Max. current 14A.
- → Prefabricated secondary lock ensures that the terminal is plugged into the housing correctly and prevents slipping out of the connector.



For 'P' and 'S' versions only the bare connector is supplied. Select appropriate seals and terminals to suit. Plug and socket kits come complete with terminals and seals.







P/N 4981-S

Part Number	1 POLE PLUG AND SOCKET		
	4981-P (Pack of 4)	PLUG	
	4981-S (Pack of 4)	SOCKET	



P/N 4982-P



P/N 4982-S

Part Number	2 POLE PLUG AND SOCKET			
	4982 (Kit)		PLUG AND SOCKET	
	4982-P (Pack of 4)		PLUG	
	4982-S (Pack of	4)	SOCKET	
	Spare Part	9.4982.05	Rubber sealing boot – cable support	



P/N 4983-P



P/N 4983-S

Part Number	3 POLE PLUG AND SOCKET			
	4983 (Kit)		PLUG AND SOCKET	
	4983-P (Pack of 3)		PLUG	
	4983-S (Pack of	3)	SOCKET	
	Spare Part	9.4983.05	Rubber sealing boot – cable support	







P/N 4984-S

	1000
--	------

P/N 4985-P



P/N 4985-S

-

P/N 4986-P



P/N 4986-S

Part Number	4 POLE PLUG AND SOCKET		
	4984 (Kit)	PLUG AND SOCKET	
	4984-P (Pack of 3)	PLUG	
	4984-S (Pack of 3)	SOCKET	

Part Number	5 POLE PLUG AND SOCKET		
	4985-P (Pack of 2)	PLUG	
	4985-S (Pack of 2)	SOCKET	

	6 POLE PLUG AND SOCKET		
Part Number	4986-P (Pack of 2)	PLUG	
	4986-S (Pack of 2)	SOCKET	

ACCESSORIES

Super Seal Connector Kit

Kit contains a variety of super seal connectors.

Part Number
Contents



	FEMALE TERMINALS FOR PLUG - PACK OF 50	
Part Number	9.4980.01	0.35 - 0.50mm ² CABLE
	9.4980.02	0.50 - 1.50mm ² CABLE



	MALE TERMINALS FOR SOCKET - PACK OF 50	
Part Number	9.4980.03	0.35 - 0.50mm ² CABLE
	9.4980.04	0.50 - 1.50mm ² CABLE



	SEALS FOR PLUG/SOCKET - PACK OF 50		
	9.4980.05		GREEN SEAL
Part Number	9.4980.06		YELLOW SEAL
	9.4980.07		RED SEAL
	9.4980.09		RED CAVITY PLUG (NO HOLE)
To Suit	P/N 9.4980.05 P/N 9.4980.06 P/N 9.4980.07 P/N 9.4980.09	Cable insulation 1.2 - 1.6mm diameter Cable insulation 1.7 - 2.4mm diameter Cable insulation 2.5 - 3.3mm diameter Red cavity plug (no hole)	



	RUBBER SEALING	B BOOT - CABLE SUPPORT
Part Number	9.4982.05	
	9.4983.05	
To Suit	P/N 9.4982.05 P/N 9.4983.05	2 pin connector 3 pin connector



	SUPER SEAL TOOLS		
Part Number	9.4980.20	CONTACT EXTRACTION TOOL	
	9.4980.21	SECONDARY LOCK TOOL	

 $\label{prop:connectors} \textit{Extraction tools for the popular super seal range of connectors, to assist in disassembly if required.}$

Don't Novelean	CRIMPING TOOL - SUPER SEAL TERMINALS
Part Number	8298
0: :	

Crimping tool designed for use with super seal connector terminals.





P/N 8200 Blister pack shown



P/N 8500 Bulk pack shown



PUSH-ON FEMALE TERMINALS						
Part Number	Туре	Quantity Per Pack	Size	Cable		
8200	BLISTER PACK	20	6.3mm	2.5 to 3mm cable		
8500	BULK PACK	100	0.311111	0.75 to 1.13mm² cable		
8201	BLISTER PACK	20	6.3mm	4mm cable. 1.84mm² cable		
8501	BULK PACK	100	0.311111			
8202	BLISTER PACK	15	6.3mm	5 to 6mm cable 2.9 to 4.59mm² cable		
8502	BULK PACK	100	0.311111			
8203	BLISTER PACK	12	9.5mm			
8503	BULK PACK	100	7.5(1)(1)			

	FULLY INSULATED FEMALE TERMINALS						
	8204	BLISTER PACK			2.5 to 3mm cable		
	8504	BULK PACK	100	6.3mm	0.75 to 1.13mm ² cable		
	8205	BLISTER PACK	12	6.3mm	4mm cable. 1.84mm² cable		
	8505	BULK PACK	100	0.311111			



PUSH-ON 2-WAY MALE AND FEMALE TERMINALS							
8210	BLISTER PACK	15	6.3mm	2.5 to 3mm cable			
8510	BULK PACK	100	0.311111	0.75 to 1.13mm ² cable			
8211	BLISTER PACK	12	6.3mm	4mm cable.			
8511	BULK PACK	100	0.311111	1.84mm² cable			
8212	BLISTER PACK	15	6.3mm				
8512	BULK PACK	100	0.311111				



BLADE MALE TERMINALS							
8213	BLISTER PACK	15	6.3mm	2.5 to 3mm cable			
8513	BULK PACK	100	0.3[1][1]	0.75 to 1.13mm ² cable			
8214	BLISTER PACK	12	6.3mm	4mm cable. 1.84mm² cable			
8514	BULK PACK	100	0.3[1][1]				
8215	BLISTER PACK	10	6.3mm	5 to 6mm cable			
8515	BULK PACK	100	o.smm	2.9 to 4.59mm² cable			



BULLET SINGLE MALE CONNECTORS						
8220	BLISTER PACK	12	2.5 to 3mm cable			
8520	BULK PACK	100	0.75 to 1.13mm ² cable			
8221	BLISTER PACK	14	4mm cable.			
8521	BULK PACK	100	1.84mm² cable			



BULLET SINGLE	FEMALE CONNECTO	DRS	
8222	BLISTER PACK	12	2.5 to 3mm cable
8522	BULK PACK	100	0.75 to 1.13mm ² cable
8223	BLISTER PACK	14	4mm cable.
8523	BULK PACK	100	1.84mm² cable

8573

BULK PACK

Part Number	Туре	Quantity Per Pack	Size	Cable
3230	BLISTER PACK	15		2.5 to 3mm cable
530	BULK PACK	100		0.75 to 1.13mm² cable
3231	BLISTER PACK	15		4mm cable.
8531	BULK PACK	100		1.84mm² cable
8232	BLISTER PACK	10		5 to 6mm cable
3532	BULK PACK	100		2.9 to 4.59mm² cable
UICK CONNECT	CABLE CONNECTOR	RS		
3235	BLISTER PACK	15		
8535	BULK PACK	50		
Vith the use of plie	rs, connects splices an	d insulates 0.75 t	o 1.13mm² (2.5 t	o 3mm) cable.
YE TERMINALS				
3240	BLISTER PACK	25		
3540	BULK PACK	100	4.3mm	
3241	BLISTER PACK	20	_	- 2.5 to 3mm cable
3541	BULK PACK	100	5mm	0.75 to 1.13mm² cable
3242	BLISTER PACK	15		_
3542	BULK PACK	100	6.3mm	
3243	BLISTER PACK	20	_	
3543	BULK PACK	100	5mm	
3244	BLISTER PACK	20	/ 2	- 4mm cable.
3544	BULK PACK	100	6.3mm	1.84mm² cable
3245	BLISTER PACK	15	0.7	_
3545	BULK PACK	100	8.4mm	
8246	BLISTER PACK	12	/ 0	
3546	BULK PACK	100	6.3mm	
3247	BLISTER PACK	12	0.1	5 to 6mm cable
3547	BULK PACK	100	8.4mm	2.9 to 4.59mm ² cable
248	BLISTER PACK	10	0.5	_
8548	BULK PACK	100	9.5mm	

6.3mm

1.84mm² cable

Insulated Terminal Assortment

Pack of 16 and 31 popular HELLA connectors/terminals.



Dant Nameh au	8280	PACK OF 16
Part Number	8281	PACK OF 31

Garage/Auto Electrical Assortment Kit - 186 Piece

Assortment containing 12 types of HELLA connectors/terminals specifically designed to meet the requirements of the automotive industry.



Part Number	8282					
Contents	A quantity of 12 complete packs.					
	Part Number Description Quantity					
	8200	Push-on female terminal	20			
	8201	Push-on female terminal	20			
	8202	Push-on female terminal	15			
	8203	Push-on female terminal	12			
	8210	Push-on 2-way male and female terminal	15			
	8211	Push-on 2-way male and female terminal	12			
	8230	Cable connector	15			
	8231	Cable connector	15			
	8232	Cable connector	10			
	8241	Eye terminal	20			
	8244	Eye terminal	20			
	8247	Eye terminal	12			

Insulated Terminal and Connector Kit - 800 Piece

Assortment containing 16 types of HELLA connectors/terminals specifically designed to meet the requirements of the automotive industry. Kit includes crimp tool P/N 8272.



Part Number	8284		
Contents	16 types of HELL	A connectors/terminals.	
	Part Number	Description	Quantity
	8200	Push-on female terminal	50
	8201	Push-on female terminal	50
	8204	Fully Insulated female terminal	50
	8205	Fully Insulated female terminal	50
	8213	Blade male terminal	50
	8214	Blade male terminal	50
	8220	Bullet single male connector	50
	8221	Bullet single male connector	50
	8222	Bullet single female connector	50
	8223	Bullet single female connector	50
	8230	Cable connector	50
	8231	Cable connector	50
	8235	Quick connect cable connector	50
	8241	Eye terminal	50
	8244	Eye terminal	50
	8247	Eye terminal	50
	8272	Crimping tool – Insulated terminals	1

310

Heat Shrink Insulated Crimp Terminals - Pack of 10

Fully insulated cable terminals with shrink-on nylon cap either with hot air gun or other heat source. Shrinking temperature 135°C.

Part Number	Туре	Colour	Cable Size	Description	
8204S 🗀	BLADE	RED	0.5 - 1mm²	To suit blade terminals	
8205S 📥	RECEPTACLES	BLUE	1.5 - 2.5mm²	6.3 x 0.8mm. Fully insulated.	1
8200S 📥	BLADE	RED	0.5 - 1mm²	To suit blade terminals	
8201S 📥	RECEPTACLES	BLUE	1.5 - 2.5mm²	6.3 x 0.8mm.	
8213S 📥	BLADE	RED	0.5 - 1mm²	Size of blade terminal	2
8214S 📥	TERMINALS	BLUE	1.5 - 2.5mm²	6.3 x 0.8mm.	
8240S 📥	RING	RED	0.5 - 1mm ²	To suit M4 pins.	-
8236S =	CONNECTORS	BLUE	1.5 - 2.5mm²	10 Suit 1914 pii 15.	0
8241S -		RED	0.5 - 1mm ²		OF
8243S 📥	RING CONNECTORS	BLUE	1.5 - 2.5mm²	To suit M5 pins.	OF
8249S -		YELLOW	4 - 6mm²		OVE
8244S 📥	RING	BLUE	1.5 - 2.5mm²	To suit M4 pins	011
8246S 📥	CONNECTORS	YELLOW	4 - 6mm²	To suit M6 pins.	OF
8245S 📥	RING	BLUE	1.5 - 2.5mm²	To suit M8 pins.	O
8247S 📥	CONNECTORS	YELLOW	4 - 6mm²	10 Suit 1410 HI11S.	OF
8230S 📥		RED	0.5 - 1mm ²		1335
8231S -	BUTT CONNECTORS	BLUE	1.5 - 2.5mm²	Cable to cable connection	-
8232S 📥		YELLOW	4 - 6mm²		1

Heat Shrink Insulated Crimp Connectors - Pack of 100

Part Number	Туре	Colour	Cable Size	Description
8530S 🔷		RED	0.5 - 1mm²	
8531S \$	BUTT CONNECTORS	BLUE	1.5 - 2.5mm²	Cable to cable connection
8532S 🔷		YELLOW	4 - 6mm²	






Box shown


ACCESSORIES

Cable Junction Box

Compact cable junction box with the option of 4 or 12 inlet/outlets, and outer cable size from $\emptyset10$ mm to $\emptyset17$ mm. Complete with connecting cartridge allowing 14 separate groups of connections (6 x 8-way and 8 x 4-way) all using 6.3mm flat blade connectors. The heavy duty nylon housing will withstand common lubricants found underneath truck and trailers, and is safe to clean with high pressure washing equipment.









P/N 2770

Part Number	2770		4 OUTLETS	
Part Number	2771		12 OUTLETS	
Fittings	2770 2771	4 x Ø13mm 1 × Ø17mm + 3 × Ø13mm + 8 × Ø10mm		
Protection	IP 69K (Prote	IP 69K (Protection against dust and high pressure/steam jet cleaning)		

14 separate connection groups.




Plug Cartridge


Connecting cartridge

Junction Box - Heavy Duty

Heavy duty nylon junction box. Box can be opened without tools via a single stainless steel bolt. Large sealing gasket withstands high pressure water blasting. Internal mounting plate for fitment of connector blocks and/or relays by self-tapping screws. Large size allows for multiple connections.







Part Number

2755





Open view

Cable Junction Box

8 Screw connections.







Part Number	2757
Cable	Suitable for medium cable up to 6mm² cross-sectional area.

Cable Junction Box


8 pole, 8 double flat plug connection.



P/N 2759



P/N 2758



Don't Novel on	2758	
Part Number	2759	
To Suit	P/N 2758 P/N 2759	Suitable for medium cable up to 6mm ² cross-sectional area. Suitable for heavy cable up to 10mm ² cross-sectional area.

8453

8454



Cable Connectors

CABLES UP TO


4MM (2.90MM2) CABLES UP TO

6MM (4.59MM2)

Strip of 12 brass connectors. Flexible plastic.



	4991	1 POLE
	4992	2 POLE
Part Number	4993	3 POLE
Part Number	4994	4 POLE
	4995	6 POLE
	4996	8 POLE
Max. Load	10A per terminal.	
Max. Cable Size	2.0mm ²	



Connector Kits

White connector kits. Includes brass terminals.



CoolSplice Sealed Connector

This connector can easily make a permanent wire-to-wire cable termination. Designed for single use, it allows for positive and negative conductors in the same connector (2 in and 2 out, and insulated from each other).

Both sides can be terminated separately and independently from each other, making the connector suitable on a pig-tail. No special tools are required, a standard pair of pliers will do.

The CoolSplice connector is UL and KEMA approved. It is recommended that the connector is housed inside an enclosure if used outdoors.



Part Number	8234S Clear	r (0.82mm²)			PACK OF 4
	8234SY Yell	low (0.50 mm²)			PACK OF 4
Conductors	2 in - 2 out.				
Max. Insulation Size	7.4mmØ				
Max. Current	8234S	5A	8234SY	3.5A	
Protection	IP 65 (Protection against dust and water jets) IP 67 (Protection against dust and temporary water immersion)				

2. Insert wire and press buttons

down to connect


Push-in Wire Connectors

Push-in wire connectors used for fast, easy and reliable connection and distribution of cables and conductors. The cables are commonly connected together inside the connector.

Available in 2, 4 and 6 pole versions and colour coded for easy identification, these connectors are suitable for a wide variety of applications. They are made from non-corrosive materials and are recommended for use in a clean and dry environment to prevent corrosion.



	8250-2 (2 Pole)	PACK OF 8	
Part Number	8250-4 (4 Pole)	PACK OF 6	
	8250-6 (6 Pole)	PACK OF 4	
Cable	Suitable for cable 0.5mm² - 2.5mm² cross-sectional area.		
Max. Current	24A @ 24V		

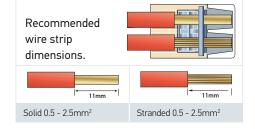

1. Buttons are raised

(as shipped).



3. Wiring complete.

Insulation Tape - Black

Black insulation tape. Made from lead free PVC. Suitable for fine wire, cables and applications requiring non-corrosive tape.

Duct Tape - Black

Premium quality plastic coated rayon fabric backing, with a high tack aggressive rubber based adhesive on one side.

Part Number	8312	18MM X 20M
Tape Thickness	0.18mm	
Elongation at Break	215%	

Part Number	8320	48MM X 30M
-------------	------	------------






Nylon Cable Ties

100% 6/6 nylon cable ties. Very flexible locking latch. Bell-mouthed head allows easier threading than previous ties. Strongest possible locking power without damaging the serrations of the tie. Quick fastening and simple locking mechanism. Black ties are UV resistant.



WHITE CABLE TIES (100 PER PACK)				
Part Number	Length	Width		
8343	143mm	3.2mm		
8344	191mm	4.8mm		
8345	368mm	4.8mm		





BLACK UV RESISTANT CABLE TIES					
Quantity 10 Per Pack	Quantity 100 Per Pack	Quantity 1000 Per Pack	Length	Width	
	8341UV		80mm	2.5mm	
	8342UV	8342UV-BULK	103mm	2.5mm	
	8343UV	8343UV-BULK	147mm	3.2mm	
8334UV	8344UV	8344UV-BULK	208mm	4.6mm	
8335UV	8345UV	8345UV-BULK	390mm	4.8mm	
8336UV	8346UV	8346UV-BULK	380mm	7.6mm	

Standard Blade Fuses (ATS)

- Pack of 10



P/N 8771





	8770	PURPLE	3A
	8771	TAN	5A
	8772	BROWN	7.5A
Part Number	8773	RED	10A
	8774	BLUE	15A
	8775	YELLOW	20A
	8776	WHITE	25A
	8777	GREEN	30A

Motorist Fuse Assortment (ATS)

- Pack of 10

10 popular blade fuses – ideal for the glove box.



Part Number	8779	2
Contents	1 x 7.5A 2 x 10A 2 x 15A 2 x 20A 2 x 25A 1 x 30A	

Mini Blade Fuses (ATN) - Pack of 10












	8770MINI	PURPLE	3A
	8771MINI	TAN	5A
	8772MINI	BROWN	7.5A
Part Number	8773MINI	RED	10A
	8774MINI	BLUE	15A
	8775MINI	YELLOW	20A
	8776MINI	WHITE	25A
	8777MINI	GREEN	30A


Low Profile Blade Fuses (ATT)

- Pack of 10



	8770LP	PURPLE	3A
	8771LP	TAN	5A
	8772LP	BROWN	7.5A
Part Number	8773LP	RED	10A
	8774LP	BLUE	15A
	8775LP	YELLOW	20A
	8776LP	WHITE	25A
	8777LP	GREEN	30A







	8790	YELLOW	20A
	8791	GREEN	30A
	8792	ORANGE	40A
Part Number	8793	RED	50A
	8794	BLUE	60A
	8796	BROWN	70A
	8795	WHITE	80A

Maxi Blade Fuses (ATM)

- Single Pack







CCESSORIE

Glass Fuses (3AG) - Pack of 5






	8755	3 AMP
	8756	5 AMP
	8757	7.5 AMP
Part Number	8754	10 AMP
Part Number	8758	15 AMP
	8759	20 AMP
	8760	25 AMP
	8761	30 AMP

Ceramic Fuses - Pack of 5





Part Number	8750	8 AMP
	8753	16 AMP
	8751	25 AMP



Circuit Breakers - Standard Blade Fuse Replacement

Compact single pole, heavy duty thermal circuit breakers with push-to-reset mechanism and separate (colour coded) manual release for extra low voltage wiring systems on all types of vehicles and marine craft. Fitted with blade terminals for plug-in mounting and retaining clips and ribs for increased pull-out force and vibration resistance. Ideal replacement for blade fuses in heavy duty applications.



	8736	PURPLE	3A
	8737	GREEN	6A
Don't Novel or	8738	RED	10A
Part Number	8739	BLUE	15A
	8740	YELLOW	20A
	8741	WHITE	25A
Voltage	Max 28V (Min 10V)		

P/N 8737	P/N 8738	P/N 8739	P/N 8740	P/N 8741

ACCESSORIES

Auxiliary Blade Fuse Holder

Add on fuse holder. Fuse holder allows you to piggy back off the original fuse with an additional holder and separate fused circuit. Comes complete with 4 fuses (3A, 5A, 7.5A and 10A).

Part Number	8701	MINI
Part Number	8703	STANDARD/ATS
To Suit	Mobile phones, stereos, amplifiers, navigation systems and fr	idges.



Pre-wired Blade Fuse Holders

	8713	MINI
Part Number	8714	STANDARD
	8715	MAXI





Pre-wired Glass Fuse Holders

Part Number	8765 (Black)	MAX. 30A
	8766 (White)	MAX. 10A



Glass Fuse Holder - Panel Mount

Part Number	8768	SOLDER TERMINALS
	8769	PUSH-ON TERMINALS
Mounting	15mm diameter opening.	






P/N 8769

Single Blade Fuse Holder

Several holders may be joined together or mated with P/N 4973 (relay holder). Comes complete with 2 terminals.



Standard Blade Fuses (ATS) Fuse Type



Part Number	8704
Cable	Suitable for cable up to 2.5mm² cross sectional area.
Fuse Type	Standard Blade Fuses (ATS)
See page 316 for full list	ing of Standrad Blade Fuses (ATS)

Single Blade Fuse Holder

30 amps maximum. May be interlocked face to face or end to end. Complete with transparent dust cover lid and snap-in terminals.





Part Number	8718	
Cable	Suitable for cable up to 2.90mm² cross sectional area.	
Fuse Type	Standard Blade Fuses (ATS)	
Soo page 214 for full licting of Standard Plade Europ (ATS)		

Single In-line Blade Fuse Holder

20 amps maximum. Complete with 15A blade fuse. Quick connect type.



Part Number	8719
Cable	Suitable for cable up to 1.84mm² cross sectional area.


Single Maxi Blade Fuse Holder

Splash-proof fuse holder with plastic cover. For loads up to 60A. Complete with 2 sets of terminals, set one for $2.5 - 6mm^2$ and set two for $5 - 10mm^2$.





Part Number	8707
Cable	Suitable for cables up to 2.5mm² - 10mm² cross sectional area.
Fuse Type	Maxi Blade Fuses (ATM)
See page 317 for full listing of Maxi Blade Fuses (ATS)	




Part Number	8720	
	8720-S	SIDE CONNECTORS
Number of Fuses	4	
Fuse Type	2 x 10A 2 x 15A	

Blade Fuse Box - 4 Fuses

Black plastic housing with transparent snap-fit lid. Flat plug connections.






Part Number 8721 SIDE CONNECTORS Number of Fuses 6 Fuse Type 3 x 10A 3 x 15A

Blade Fuse Box - 6 Fuses

Black plastic housing with transparent snap-fit lid. Flat plug connections.





Part Number	8722	
	8722-S	SIDE CONNECTORS
Number of Fuses	8	
Fuse Type	4 x 10A 4 x 15A	

Blade Fuse Box - 8 Fuses


Black plastic housing with transparent snap-fit lid. Flat plug connections.



Blade Fuse Box - 16 Fuses

16-way fuse box featuring black plastic housing with secondary locks, transparent cover and sealing gasket. Supplied with mounting brackets.






Part Number	8724
Number of Fuses	16
Fuse Type	6 x 10A 6 x 15A 2 x 20A 2 X 25A

Blade Fuse Box - 6 Fuses

Black plastic housing with transparent snap-fit lid and 6.3mm male blade terminals. 5mm diameter stud input. Complete with 2 spare fuse holders and label set.





Part Number	8725
Number of Fuses	6
Fuse Type	3 x 10A 3 x 15A

ACCESSORIES

Fusible Link - Female



Female plug-in fuse link.

	8790-FLFS	LIGHT BLUE	20A
	8791-FLFS	PINK	30A
	8792-FLFS	GREEN	40A
Part Number	8793-FLFS	RED	50A
	8794-FLFS	YELLOW	60A
	8795-FLFS	BROWN	70A
	8796-FLFS	BLACK	80A
	8797-FLFS	BLUE	100A















P/N 8791-FLFS P/N 8792-FLFS P/N 8793-FLFS P/N 8794-FLFS P/N 8795-FLFS P/N 8796-FLFS

Mini Fusible Link - Female



Female mini plug-in fuse link.

Part Number	8790-FLFE	LIGHT BLUE	20A
	8791-FLFE	PINK	30A
	8792-FLFE	GREEN	40A
	8793-FLFE	RED	50A
	8794-FLFE	YELLOW	60A
	8795-FLFE	BROWN	70A
	8796-FLFE	BLACK	80A





Mini Fusible Link - Female

Mini female plug-in fuse link.

P/N 8790-FLFM



P/N 8797-FLFM



	8790-FLFM	LIGHT BLUE	20A
	8791-FLFM	PINK	30A
	8792-FLFM	GREEN	40A
Part Number	8793-FLFM	RED	50A
	8794-FLFM	YELLOW	60A
	8795-FLFM	BROWN	70A
	8796-FLFM	BLACK	80A
	8797-FLFM	BLUE	100A













P/N 8791-FLFM P/N 8792-FLFM P/N 8793-FLFM P/N 8794-FLFM P/N 8795-FLFM P/N 8796-FLFM

Fusible Link with Lock Tab - Female

Female plug-in fuse link with lock.



P/N 8792-FLMKP



	8792-FLMKP	RED	45A
Part Number	8794-FLMKP	BLACK	65A
	8796-FLMKP	GREY	75A





P/N 8794-FLMKP P/N 8796-FLMKP

Mini Fusible Link with Lock Tab - Female

Mini female plug-in fuse link with lock.



P/N 8790-FLMNP



Part Number	8790-FLMNP	BROWN	25A
Part Number	8791-FLMNP	GREEN	30A




P/N 8791-FLMNP





Fusible Link - Male

Male bolt-in fuse link.



				~
	8790-FLM	-	LIGHT BLUE	20A
	8791-FLM	-	PINK	30A
	8792-FLM	-	GREEN	40A
Part Number	8793-FLM	-	RED	50A
	8794-FLM	-	YELLOW	60A
	8795-FLM	-	BROWN	70A
	8796-FLM	-	BLACK	80A
	8797-FLM	-	BLUE	100A





8798-FLM









WHITE



120A

P/N 8791-FLM P/N 8792-FLM P/N 8793-FLM P/N 8794-FLM P/N 8795-FLM P/N 8796-FLM P/N 8798-FLM

	8790-FLB	LIGHT BLUE	20A
	8791-FLB	PINK	30A
	8792-FLB	GREEN	40A
Part Number	8793-FLB	RED	50A
	8794-FLB	YELLOW	60A
	8795-FLB	BROWN	70A
	8796-FLB	BLACK	80A
	8797-FLB	BLUE	100A
	8798-FLB	WHITE	120A















P/N 8791-FLB P/N 8792-FLB P/N 8793-FLB P/N 8794-FLB P/N 8795-FLB P/N 8796-FLB P/N 8798-FLB

	8790-FLBS	LIGHT BLUE	20A
	8791-FLBS	PINK	30A
	8792-FLBS	GREEN	40A
Part Number	8793-FLBS	RED	50A
	8794-FLBS	YELLOW	60A
	8795-FLBS	BROWN	70A
	8796-FLBS	BLACK	80A
	8797-FLBS	BLUE	100A
	8798-FLBS	WHITE	120A
















P/N 8790-FLBS

Fusible Link, Male - L-Type Long

Male L-type fuse link with long leg.



Fusible Link, Male - L-Type Short

Male L-type fuse link with short leg.



Contents

HELLA Workshop

LED Inspection Lamp - Unipen Gen II	328
LED Inspection Lamp - Slim	329
LED Inspection Lamp - Mini Slim	329
LED Inspection Lamp - I-View	330
LED Inspection Lamp - Miniform	330
LED Inspection Lamp - Mini Mag	331
LED Inspection Lamp - Mag 3 Gen II	331
LED Inspection Lamp - Uniform Gen III	332
LED Inspection Lamp - UV-Form	332
LED Work Lamp - Uni Max	333
LED Work Lamp - Nova 3K C+R	334
LED Work Lamp - Nova 5K C+R	335
LED Work Lamp - Nova 10K	335
LED Work Lamp - Nova Tripod	336
LED Work Lamp - Nova Accessories	337
LED Flash Torch Series - Flash Pen R	338
LED Flash Torch Series - 12V Flashlight	338
LED Hand Held Spot Lamps	339
HELLA Beamsetters	341

NORKSHOF

HELLA LED Inspection Lamps have been designed with the workshop in mind.

With high power efficient LEDs providing evenly spread natural light; a range of styles designed for a variety of situations; and construction to last – HELLA Inspection Lamps will become your most valued workplace tool.

- → High power LEDs.
- → Easy to use.
- → Impact and shock resistant.
- → Natural light colour similar to daylight.
- → Low current consumption, high efficacy.
- → Strong, sturdy and resistant to water, oil and chemicals.



LED Inspection Lamp - Unipen Gen II

The Unipen Gen II has been upgraded with modified back clip for better grip in pockets and IP65 rating. Unipen has a powerful and completely uniform illumination which is ideal for a working light. Furthermore Unipen has a high power LED top light that gives Unipen a powerful flashlight function. Unipen's flexible lamp head tilts up to 180 degrees. Unipen is supplied with a strong built-in magnet for easy positioning in the workspace and a pocket clip. The small and handy shape of the Unipen makes it perfect to always have "on hand".







Part Number	2XM 910 602-011		
Light Output	Main: Spot (top):	100 lumen for up to 2.5 hours. 50 lumen for up to 2.5 hours.	
Light Performance	Main: Spot (top):	160 lux @ 0.5m 485 lux @ 0.5m	
Temperature Range	-10° to +40°C		
Protection	IP 65		
Dimensions	156mm x 27mm x 18mm		
Battery	3.7V/750 mAh Li-ion rechargeable. 3 hour charging time via USB.		
Spare Part	2XM 910 529-141	1m USB cable	
Compliance	&		

Includes 1m USB cable. Note charger not included.







Top spot light



1m USB cable P/N 2XM 910 529-141

1m USB cable is also compatible with other LED Inspection Lamps listed: Slim/Mini Slim/I-View/ Miniform/MiniMag/Mag 3/ Uniform Gen III/UV Form/ Uni Max











Adjustable lamp

Hook for hanging

Magnetic mounting

Part Number	2XM 910 414-01	1	
Light Output	Stage1: Stage2: Spot:	250 lumen for up to 5 hours. 500 lumen for up to 2.5 hours. 100 lumen for up to 2.5 hours.	
Light Performance	Stage1: Stage2: Spot:	400 lux @ 0.5m 800 lux @ 0.5m 4800 lux @ 0.5m	
Temperature Range	-10° to +40°C		
Protection	IP 30		
Dimensions	310mm x 45mm x 33mm		
Battery	3.8V/2800 mAh Li-ion rechargeable. 4.5 hour charging time.		
Compliance	<u>&</u>		
Includes 1m USB cable and 240V charger			











1m USB cable P/N 2XM 910 529-141

240V charger

LED Inspection Lamp - Slim

Slim LED inspection lamp is not only one of the most compact on the market, but it also offers 3 lamps in 1, with two brightness settings for ultimate versatility. When open, the lamp is an ideal inspection light, perfect for getting into the most inaccessible locations. Folded in half, the lamp can be used as a traditional hand-held work light. When required the inspection lamp can also be used as a powerful flashlight with a handy, comfortable grip. In the folded state, the lamp is reduced to pocket size - compact and portable to take with you everywhere.

















Magnetic mounting

Part Number	2XM 910 414-02	1	
Light Output	Stage1: Stage2: Spot:	100 lumen for up to 5 hours. 200 lumen for up to 2.5 hours. 100 lumen for up to 3 hours.	
Light Performance	Stage1: Stage2: Spot:	150 lux @ 0.5m 400 lux @ 0.5m 5200 lux @ 0.5m	
Temperature Range	-10° to +40°C		
Protection	IP 30		
Dimensions	242mm x 41mm x 30mm		
Battery	3.7V/1200 mAh Li-ion rechargeable. 3 hour charging time.		
Compliance	<u> </u>		
Includes 1m USB cable and 240V charger.			











1m USB cable P/N 2XM 910 529-141

240V charger

LED Inspection Lamp - Mini Slim

Mini Slim LED inspection lamp is not only one of the most compact on the market, but also offers 3 lamps in 1, with two brightness settings for ultimate versatility. When open, the lamp is an ideal inspection light, perfect for getting into the most inaccessible locations. Folded in half, the lamp can be used as a traditional hand-held work light. When required the inspection lamp can also be used as a powerful flashlight with a handy, comfortable grip. In the folded state, the lamp is reduced to pocket size - compact and portable to take with you everywhere.



NORKSHOF

LED Inspection Lamp - I-View

The I-VIEW lights up the entire work space and not just the area the lamp is pointed at, the inspection lamp is designed for professional end users. Once the sensor setting is activated the lamp may be turned on and off by simply waving your hand in front of the lamp – even when wearing gloves.

The lightweight ergonomically designed inspection headlamp features a light output of 200lm on the high and 100lm on the low setting. By using the latest battery technology, there is simply no need for extra battery supplies, making your job more efficient.







Standard Lamp

I-View Lamp



Part Number	2XM 910 601-001		
Light Output	LO - 100 lumen for up to 6 hours. HI - 200 lumen for up to 3 hours.		
Light Performance	LO - 300 lux @ 0.5m HI - 500 lux @ 0.5m		
Temperature Range	-10° to +40°C		
Protection	IP 65 (Protection against dust and water jets)		
Dimensions	105mm x 52mm x 43mm		
Battery	3.8V/1600 mAh Li-polymer. 4 hour charging time.		
Compliance	△		



Includes 1m USB cable and 240V charger.

Touchless sensor switch on/off technology



1m USB cable 240V charger P/N 2XM 910 529-141

LED Inspection Lamp - Miniform

Multifunctional pocket sized rechargeable LED inspection lamp. Features a strong magnetic base, retractable swivel hook and a flexible 180° head for powerful uniform lighting at any angle. Complete with 240V charger.





Retractable swivel hook



Strong built-in magnet base and 180° flexible head





Part Number	2XM 910 415-001			
Light Output	Stage 1: 55 lumen for up to 5 hours Stage 2: 110 lumen for up to 2.5 hours			
Light Performance	Stage 1: Stage 2:	130 lux @ 0.5m 260 lux @ 0.5m		
Temperature Range	-10° to +40°C			
Protection	IP 20			
Dimensions	120mm x 60mm x 13mm 120mm x 60mm x 25mm (with belt Clip / hook)			
Battery	3.7V/1000 mAh Li-ion rechargeable. 2.5 hour charging time.			
Compliance	&			
Includes 1m USB cable	Includes 1m USB cable and 240V charger.			



1m USB cable P/N 2XM 910 529-141



240V charger





Part Number	2XM 910 413-021		
Light Output	Main: Spot (top):	120 lumen for up to 4 hours. 50 lumen for up to 4 hours.	
Light Performance	Main: Spot (top):	280 lux @ 0.5m 800 lux @ 0.5m	
Temperature Range	-10° to +40°C		
Protection	IP 20		
Dimensions	202mm x 40mm x 28mm		
Battery	3.7V/1200 mAh Li-ion rechargeable. 3 hour charging time.		
Compliance	<u>&</u>		
Includes 1m USB cable. Note charger not included.			



1m USB cable P/N 2XM 910 529-141



Top spot light



Retractable hook and strong built-in magnet



180° Flexible Head

LED Inspection Lamp - Mini Mag

The Mini Mag comprises an extremely powerful, rechargeable LED work light and flashlight in one. Containing the latest high performance LED technology this inspection lamp is a must have. The new and modern design of the Mini Mag provides an ergonomic and user-friendly grip. The strong built-in magnetic holder and retractable suspension hook allows you to place the Mini Mag anywhere. The 180° flexible lamp head makes lighting those hard to see areas a lot easier.







Part Number	2XM 910 413-011		
Light Output	Main: Spot (top):	250 lumen for up to 3 hours. 150 lumen for up to 3 hours.	
Light Performance	Main: Spot (top):	500 lux @ 0.5m 1500 lux @ 0.5m	
Temperature Range	-10° to +40°C		
Protection	IP 20		
Dimensions	270mm x 62mm x 41mm		
Battery	3.7V/2200 mAh Li-ion rechargeable. 4 hour charging time.		
Compliance	<u>&</u>		
Includes 1m USB cable	Includes 1m USB cable and 240V charger.		



1m USB cable P/N 2XM 910 529-141

240V charger



Top spot light



Retractable hook and strong built-in magnet

LED Inspection Lamp - Mag 3 Gen II

High power rechargeable LED inspection lamp and torch. Features 3 strong magnets, 2 swivel hooks, and a 180° flexible head for powerful lighting at any angle. Complete with 240V charger.





180° Flexible Head

WORKSHO

LED Inspection Lamp

- Uniform Gen III

Rechargeable LED inspection lamp featuring rubber housing, intelligent battery indicator, swivel hook and magnetic-based charging unit. Delivers a powerful and uniform light output. Complete with 240V charger.





180° Flexible Head



Strong built-in magnet



Retractable hook

Top spot light



Shown in charger





Part Number	2XM 910 412-011				
Light Output	Main: 150/300 lumen for up to 6/3 hours. Spot (top): 150 lumen for up to 3 hours.				
Light Performance	Main: 200/500 lux @ 0.5m Spot (top): 2000 lux @ 0.5m				
Temperature Range	-10° to +40°C				
Protection	IP 65 (Protection against dust and water jets)				
Dimensions	190mm x 60mm x 32mm				
Battery	3.7V/2200 mAh Li-ion rechargeable. 4 hour charging time.				
Compliance					
Includes 1m USB cable and 240V charger.					



le 240V charger

LED UV-Form

The rechargeable LED UV-Form is a universal indispensable work light and UV detection in one, with powerful 1.5W UV-light on the top it is a suitable replacement for special UV detection lights. The ultraviolet light is intended for leak detection in airconditioning systems by means of trace elements. Also useful for leak detection of larger, complex refrigeration/freezing appliances, process-cooling systems, heat pump systems etc.




















Part Number	2XM 910 606-001			
Light Output	Main: 150 lumen for up to 3 hours. Spot (top): UV for up to 3 hours.			
Light Performance	Main: Spot (top):	340 lux @ 0.5m UV		
Temperature Range	-10° to +40°C			
Protection	IP 20			
Dimensions	157mm x 59mm x 23mm			
Battery	3.7V/1600 mAh Li-ion rechargeable. 3 hour charging time.			
Compliance	<u> </u>			
Safety Note	Do not operate UV light without eye protection.			

Includes 1m USB cable and 240V charger.

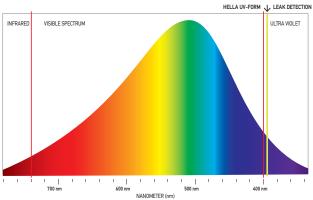





Part Number	2XM 910 605-001		
Light Output	Stage 1: Stage 2:	450 lumen for up to 5 hours 900 lumen for up to 2.5 hours	
Light Performance	Stage 1: Stage 2:	650 lux @ 0.5m 1300 lux @ 0.5m	
Temperature Range	-10° to +40°C		
Protection	IP 54		
Dimensions	196mm x 187mm x 43mm		
Battery	3.7V/4400 mAh Li-ion rechargeable. 6 hour charging time.		
Compliance	<u> </u>		
Includes 1m USB cable. Note charger not included.			



The Uni Max features an adjustable stand that can rotate 180° so the lamp can be placed in different positions to obtain the desired light angle.



Built-in power bank with USB outlet to charge your mobile devices. USB phone charger not included.



Compact and light weight, the Uni Max is designed with an integrated handle to conveniently hand carry.


LED Work Lamp - Uni Max

A new cost effective rechargeable LED universal flood lamp that is small in size, but large in features and light output. The lamp is remarkably slim (only 41mm), with a maximum light output of 900lm and a 50% setting of 450lm for longer battery charge run time. An extremely useful feature is Uni Max's built-in power bank with USB outlet to charge your mobile devices. Uni Max is suitable for many applications including camping, boating on the worksite or left in the toolbox for when you really need a dependable flood light.





1m USB cable P/N 2XM 910 529-141



HELLA is now introducing a completely new generation of Nova work lamps, the best, most sturdy and highly unique COB LED work lights for the professional market. With high-power efficient LEDs providing diffused natural light; a range of styles designed for a variety of situations; and construction to last − HELLA Work Lamps will become your most valued workplace tool. → Easy to use. → Lifetime of at least 50,000 hours → Resistant to shocks and blows → Natural light − colour similar to daylight. → Low current consumption, high efficacy. → Strong, sturdy and resistant to water, oil and chemicals.

LED Work Lamp - Nova 3K C+R

The Nova (3K C+R) is a universal all-round work lamp, and can operate either on batteries or 240V input (DUAL SYSTEM) providing you endless application possibilities and able to endure the rough, wet and dirty environments, and can be used indoors or outdoors under all kinds of weather conditions. The new light dimmer function makes it possible to adjust the light to five different light levels. Featuring the latest LED technology, the new Nova LED work lamps deliver extremely high light output, with a uniform and completely even illumination. An intelligent display for battery capacity and remaining operating time is available on the rear of the lamp. The CRI value is close to daylight, and the Nova housing is made of robust die cast aluminium, and is resistant to shocks and vibration.










Part Number	2XM 910 426-101					
Voltage	100-240V AC - 50/60Hz					
Light Output	3000 lumen @ 100% 2250 lumen @ 75% 1500 lumen @ 50% 750 lumen @ 25% 300 lumen @ 10%					
Light Performance	5000 lux @ 0.5m for up to 14 hours					
Power Consumption	26W					
Temperature Range	-10° to +40°C					
Protection	IP 67 (Protection against dust and water splash)					
Battery	11.1V/4400 mAh Li-ion rechargeable 2 hour charging time.					
Cable Length	Pre-wired with 5m of cable (2x0.75 mm² H05RN-F)					
Spare Part	2XM 910 529-081 C+R car adaptor					
Compliance						



view C + R car adaptor P/N 2XM 910 529-081







Part Number	2XM 910 426-111					
Voltage	100-240V AC - 50/60Hz					
Light Output	5000 lumen @ 100% 3750 lumen @ 75% 2500 lumen @ 50% 1250 lumen @ 25% 500 lumen @ 10%					
Light Performance	8000 lux @ 0.5m up to 12 hours					
Power Consumption	42W					
Temperature Range	-10° to +40°C					
Protection	IP 67 (Protection against dust and water splash)					
Battery	11.1V/5200 mAh Li-ion rechargeable 2 hour charging time.					
Cable Length	Pre-wired with 5m of cable (2x0.75 mm² H05RN-F)					
Spare Part	2XM 910 529-081 C + R car adaptor					
Compliance						



LED Work Lamp - Nova 5K C+R


The Nova (5K C+R) is a universal all-round work lamp, and can operate either on batteries or 240V input (DUAL SYSTEM) providing you endless application possibilities and able to endure the rough, wet and dirty environments, and can be used indoors or outdoors under all kinds of weather conditions. The new light dimmer function makes it possible to adjust the light to five different light levels. Featuring the latest LED technology, the new Nova LED work lamps deliver extremely high light output, with a uniform and completely even illumination. An intelligent display for battery capacity and remaining operating time is available on the rear of the lamp. The CRI value is close to daylight, and the Nova housing is made of robust die cast aluminium, and is resistant to shocks and vibration.







P/N 2XM 910 529-081



Part Number	2XM 910 426-121					
Voltage	100-240V AC - 50/60Hz					
Light Output	10000 lumen @ 100% 7500 lumen @ 75% 5000 lumen @ 50% 2500 lumen @ 25% 1000 lumen @ 10%					
Light Performance	16000 lux @ 0.5m					
Power Consumption	84W					
Temperature Range	-10° to +40°C					
Protection	IP 67 (Protection against dust and water splash)					
Cable Length	Pre-wired with 5m of cable (3x1 mm² H05RN-F)					
Compliance	&					
Includes wireless light control: *via App on smart devices.						

Rear view

LED Work Lamp - Nova 10K

Nova 10K is the most powerful workshop lamp in the market, upholding 10000 lumen and making it a universal all-round work lamp for the most challenging lighting operations in every working environment. Able to endure the rough, wet and dirty environment at the construction site, and can be used indoors and for outdoor work under all kinds of weather conditions. The new light dimmer function makes it possible to adjust the light into five different levels. With the integrated wireless light control feature you can easily control up to four work lamps. The light control also makes it possible to turn on/off the lamp and adjust the light output to suit the work task in question. The wireless application is perfect when working with one or more hard-to-reach lamps, for example positioned on the HELLA Tripod.



Nova Tripod

The HELLA Tripod is designed to meet any working situation where flexible illumination is key. Extendable from 1.35m to 3m, the tripod offers complete flexibility to position the work lamp into the required height and angle.

The tripod is made of durable powder coated steel and a welded steel mounting cap (10mm thread) ensures the durability of the universal tripod stand. When not in use the tripod is compact with a weight of 6kg.

Streamlined in both design and construction, the HELLA Tripod can be applied for both indoor and outdoor use. To increase safety when in use, work lamp cables can be stored in the safety clips placed on each of the tripods legs. This tripod fits all Nova work lamps.

Part Number	2XM 910 529-101			
Weight	6kg			
Dimensions	1080 x 140 x 130 mm			
Spare Parts	2XM 910 529-111 Top-Knob of Tripod 2XM 910 529-121 Side-Knob of Tripod			





360° locking system for a firm grip



Top-Knob of Tripod Side-Knob of Tripod P/N 2XM 910 529-111 P/N 2XM 910 529-121

WORKSHOP

Dual Bracket

The Dual bracket is made for positioning of two lamps. The bracket is compatible with the new and previous generations of Nova lamps.

Part Number	2XM 910 529-051	(Dual Bracket))	
Dimensions	25 x 25 x 600 mm			
		-		7
	Du	al Bracket		
	Du	ngle and al tripod nfigurations		+ =



Part Number	2XM 910 529-091 (Universal Nova Brack	et)
-------------	---------------------------------------	-----

Universal Nova Bracket

This universal bracket is designed to mount all sizes of previous generation Nova lamps on to the new tripod.





Part Number	2XM 910 529-061 (Magnetic Mount)
Dimensions	260 x 60 x 50 mm

Magnetic Mounting Bracket

This universal bracket is designed to mount all sizes of previous generation Nova lamps on to the new tripod.





Magnetic Mount

Part Number	2XM 910 529-071 (Scaffolding Bracket)
Dimensions	170 x 105 x 60 mm



Scaffolding Mounting Bracket

This bracket is specially designed to fix Nova lamps on scaffoldings. The mount can be attached to any round object ø40-50 mm. This bracket is of same sturdy quality as standard fittings for scaffolding. The lamp can be tilted to the desired position in the mount and the installation is extremely flexible. This bracket is only compatible with the new generation of Nova lamps.

VORKSHO

LED Flash Pen R

The Flash Pen R is very sturdy and of extraordinary high quality designed for the professional user. It has focus function for concentrated and focused light beam offering an extremely bright light output of 100 lumen. Light output reaches up to 90m. Flash Pen R features a sturdy and durable aluminium housing with a good ergonomic grip for a firm hold. Supplied with clip for the chest pocket. The flashlight can easily be recharged by the enclosed USB cable.







Part Number	2XM 910 416-011
Light Output	100 lumen for up to 2 hours.
Light Performance	500-800 lux @ 0.5m. Light reaches up to 90m.
Temperature Range	-10° to +40°C
Protection	IP 30
Dimensions	19mm x 160mm
Battery	3.7V/1100 mAh Li-ion rechargeable. 4 hour charging time.
Compliance	<u>&</u>



USB cable







LED Pocket Sized Flashlight

The small LED Flashlight is compact and designed to have in the pocket and always at hand when needed. The flashlight is easily charged on the fly, you just plug it directly into the DC Power socket in your car, without the need of charger device, cable, or batteries! The LED Flashlight provides an extremely bright light output of 130 lumen, and the light output reaches up to 100m. By means of the focus function you can vary the beam angle from 10° to 70°, from concentrated and focused light beam angle to long-distance light.








Part Number	2XM 910 603-001
Voltage	10-28V DC (Suitable for 12V and 24V power socket)
Light Output	130 lumen for up to 1 hour.
Light Performance	900-8000 lux @ 0.5m.
Temperature Range	-10° to +40°C
Viewing Angle	10° - 70°
Protection	IP 30
Dimensions	Ø30mm x 105mm
Battery	3.7V/550 mAh Li-ion rechargeable. Recharges using DC power socket. 2 hour charging time.
Compliance	<u>&</u>






BEAM PATTERNS

WORKSHOP









Part Number	1520LED	LONG RANGE	
	1521LED	MEDIUM RANGE	
Voltage	10-16 V		
Power Consumption	35W		
Light Output	1350 lumen		
Compliance	&		







Battery clips to power socket adaptor (Supplied)


HELLA Bag (Supplied)

LED Hand Held Spot Lamp

The new LED hand held spot lamp only uses 1/3 of the power consumption of the 1520. It has a compact size and light weight, and is comfortable to hold even for long periods. The LED spot lamp comes with a spiral plug-in cable (which can stretch up to 3.5m) and a DT connector, which allows a custom cable to be fitted to suit your own requirements.




Long Range 2m high at 5° 20 1 LUX 121m

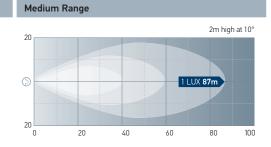



140



Hand Held Spot Lamp

Blue (P/N 1520) hand held long range spot lamp range. Includes plug, spiral cable (extendable to 2m) and on-off switch. Black (P/N 1524) hand held long range spot lamp range. Includes plug, spiral cable (extendable to 2m) and momentary pressure contact on-off switch.

	LONG RANGE HAND HELD SPOT LAMP						
Part Number	1520 (On-Off	BLUE					
	1524 (On-Off Momentary Switch)						
Voltage	12V sealed bea	12V sealed beam included.					
Power Consumption	100W	100W					
Spare Parts	1089 9.1520.06 9.1524.06 9.1520.07	Sealed beam Switch - on-off Switch - momentary Spiral cable					


100



P/N 9.1524.06



techfeedback@hella.co.nz

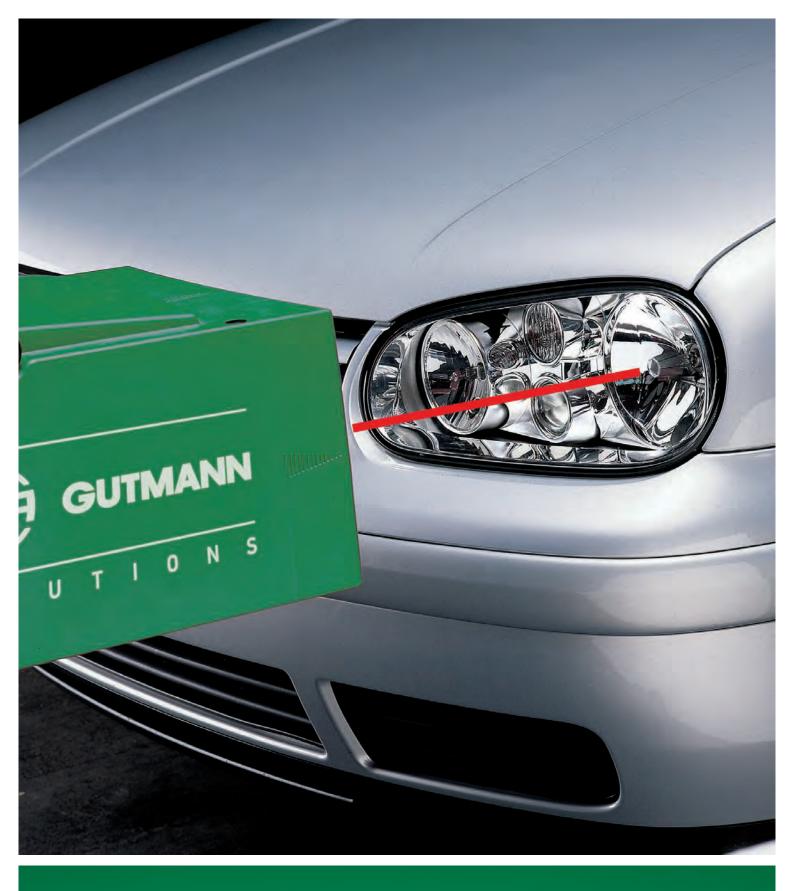

The HELLA Headlamp Aimer is a precision workshop instrument designed to accurately check vehicle headlamps. It was developed especially for use in professional workshops and vehicle testing stations.

HELLA BEAMSETTERS

Precision Headlamp Adjustment. The importance of regular checking and re-adjustment of headlamps emerges clearly from the fact that about 33% of all vehicles coming in for this service have incorrectly adjusted headlamps. In about half these cases the headlamp beams are too high and dazzle oncoming traffic, while in the remaining cases the headlamps are too low or point left or right, reducing the driver's field of vision and driving safety.

The HELLA Headlamp Aimer provides high accuracy in lighting checks and is also able to test the latest in new technology headlamps. The beamsetter box, the heart of the unit, is constructed of impact and corrosion resistant material that withstands even aggressive fluids used in workshops.

Its functional design allows quick, precise and simple headlamp adjustment. Precision workshop instrument with wide-band sight aligner for quick and precise checking and setting of headlamps, auxiliary driving and fog lamps on all vehicles. Unit features sturdy base, large viewing screen and a combination volt and light output meter. Easy height adjustment.

HELLA Beamsetter

Standard Beamsetter with digital voltage and lux readings.

Part Number	SEG 700L
	SEG 700DLX (Includes laser sight aligner)

Digital indication of illuminance.



Features include:

- → Wide band sight aligner.
- → Combination volt and light output meter.
- → Sturdy base.
- → Large viewing screen.
- → Easy height adjustment.
- → Spare parts availability.





Contents

Automotive Bulbs

Quick Reference Bulb Guides	348-351
Xenon Gas Discharge Bulbs (HID)	352-353
Halogen Bulbs - H4	354
Halogen Bulbs - H7	355
Halogen Bulbs - H1	356
Halogen Bulbs - H3/H2	357
Halogen Bulbs - H8/H9	358
Halogen Bulbs - H10/H11	359
Halogen Bulbs - HB3/HB4/H1R2	360
Halogen Bulbs - H15/H16	361
Halogen Bulbs - 800 Series	362
Halogen and Headlamp Bulbs	363
Signal and Marker Bulbs	364-371
Halogen/Interior/Special Bulbs	372
Fluorescent/Strobe Tubes	373



THE HUMAN HEART BEATS ONCE PER SECOND. HELLA INSTALLS ~ 5.7 BULBS IN THE SAME PERIOD OF TIME

Why HELLA Bulbs?

HELLA automotive bulbs are renowned for their uncompromising adherence to the highest quality and safety standards. There's a HELLA bulb to suit almost every requirement.

- → Optimal light quality
- → Uncompromisingly high testing standards
- → Durable and robust products
- → Lowest possible failure rate

TS Pro Bulbs

TS Pro bulbs are a new generation of highperformance halogen bulbs specifically designed to cope with the heavy duty demands of 24 volt heavy commercial transport applications.

Utilising innovative single-coil filaments, TS Pro halogen bulbs offer significantly increased service life of up to 100% when compared to standard halogen bulbs. They also feature superior vibration resistance during extended periods of operation, leading to reduced vehicle servicing costs and downtime.

In addition to extended service life and improved durability, TS Pro halogen bulbs provide up to 100% increased illumination of the road ahead when compared to a standard halogen bulb. This results in improved vision and clearer visibility of objects and traffic situations in the distance ahead, effectively reducing eyestrain and driver fatigue, adding valuable seconds to driver reaction times for improved night driving safety.

Replacement Bulbs

The New Zealand lighting rules state that all certified legal lamps (headlamps or tail lamps) must be fitted with an approved light source to remain legal, if the light source is replaced.

Most HELLA bulbs will be marked with an 'E mark' to show compliance. Some bulbs, to suit older vehicles or imports not originally destined for our market, may have different standards such as JIS (Japanese Industrial Standard). HELLA shows compliant bulbs under the category column in the bulb section.

Safe for Modern Headlamps

All halogen bulb filaments produce UV radiation. If the glass casing of the bulb does not filter the UV radiation it will be harmful to the polycarbonate lenses used on most of today's vehicles.


Excessive UV radiation from the halogen or HID bulb will result in discolouration and substantially diminished light transmission of the headlamp lens. All HELLA halogen and HID automotive bulbs are UV-reduced and are safe for use in modern headlamps with polycarbonate lenses.



Note: LED replacement bulbs are generally illegal for use in marker, signal and headlights as they do not comply with a lighting standard.

To avoid failing a Warrant/Certificate of Fitness inspection, all lighting equipment must comply with the law and meet approved standards.

RIGOROUS TESTING GUARANTEES PREMIUM QUALITY



A measuring projector is used to check the filament geometry – with regard to the statutory standards in accordance with IEC 60810. The filament must be dimensioned and positioned within the bulb as specified in the standard. This is the only way to achieve optimum headlight power and prevent glare to oncoming traffic.



The adhesion of paint on coloured glass bulbs such as the PY21W for example - is tested in a climate chamber at different temperatures and air humidities. Optimal adhesion of glass bulb paint guarantees the prescribed amber indicator light.



Vibration resistance of the bulbs and the filament in particular is tested on an electro-dynamic vibration table.



Sophisticated tests are used to prove the high reliability of HELLA bulbs over a long period.






The Ulbricht sphere and goniometer are used to determine the light fluxes and luminous intensities of the HELLA bulbs. This guarantees optimum light output of the bulbs. These tests and measurements form the basis of our tested quality.

COLOUR TEMPERATURE EXPLAINED

Colour temperature is a measurement in degrees Kelvin that indicates the hue of a specific type of light source. (Kelvin is indicated by the unit symbol K).

Colour temperatures over 4000K are called cool colours (blueish white), while lower colour temperatures (2700 – 3000K) are called warm colours (yellowish white through red).


The higher the temperature of a light source is, the greater the proportion of blue and the lower the proportion of red in the colour spectrum. An incandescent light bulb has a warm white colour temperature of approx. 2700K.

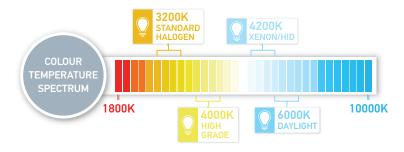

The illustration provides an indication of the colour temperature spectrum.

XENON GAS DISCHARGE LAMPS

Xenon (HID) based front lighting systems are still among the best lighting systems available in terms of both quality and quantity.

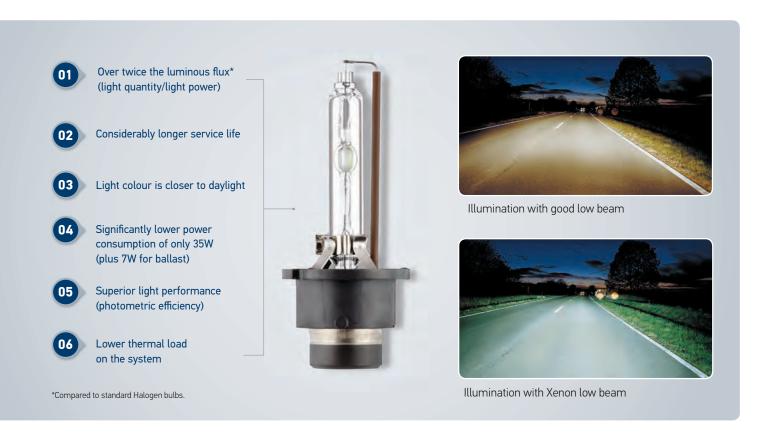

The Xenon gas discharge, or high intensity discharge (HID) bulb illuminates via a light arc that is ignited between two electrodes. This technology requires a complex electronic ballast.

To optimise and maintain a safe lighting system, additional system features are often required e.g. headlamp cleaning systems, automatic headlight range adjustment and levelling systems for ECE type approved systems.

Additional Regulations for Xenon Low Beam

In the ECE region, headlights with Xenon low beams may only be used in conjunction with automatic or dynamic headlight range adjustment and levelling system as well as a headlight cleaning system. This regulation takes into account the intense luminous performance of the Xenon bulb and is designed to ensure the safety of all road users.

How They Work

A sophisticated ballast supplies the ignition voltage required to ignite the gas between two electrodes. This ignition voltage can be up to 30kV in 4th generation ballasts. Inside the bulb is a mixture of inert Xenon gas, metals and metal halides, which are ionised upon ignition resulting in a powerful light arc.

During the controlled supply of alternating current (at approx. 400Hz) the liquid and solid substances evaporate, due to high internal temperatures. The lamp only achieves its full brightness after a few seconds when all the components have been ionised. To prevent destruction of the lamp through uncontrolled increases in current, the current is limited by a ballast. Once the full light output has been reached, an operating voltage (not the ignition voltage) of only 85V is necessary to maintain the physical process. The luminous flux, light output, luminance and service life of Xenon HID bulbs significantly surpasses halogen bulbs.

HID Ultra plus (UP) - Up to + 70% brighter

Ultra Plus bulbs are the ideal bulbs for drivers looking to increase safety with more light on the road. This HID bulb produces up to 70% more light on the road, has a beam that is up to 20 metres longer than a standard bulb.

Colour Match HID Bulbs

As HID bulbs age, the colour temperature increases resulting in a whiter light. When an HID bulb is replaced with a new bulb it can look yellow compared to the original bulb, and will whiten with use. If a white light from installation is desired, a colour match bulb may be used (D2R-5K, D2S-5K) which will be a closer match to the older bulb from the first use. These bulbs are ECE compliant.

Fault Diagnosis for HID bulbs

Check whether the ballast is attempting to ignite the bulb after the light has been switched on. Ignition attempts can be heard clearly near the headlight.

If ignition attempts are unsuccessful, the Xenon bulb should be checked by swapping it with one from the other headlight and the process tried again. If no ignition attempt is carried out, the fuse should be checked.

If the fuse is functional, check the voltage and ground supply directly at the ballast. Voltage must be at least 9V for 12V systems. If the voltage ground is verified and the Xenon bulbs are functional a faulty ballast is likely to be cause of the problem.


Conversion kits (HID and LED)

Converting an approved headlamp to another light source (e.g. Halogen to LED bulb) is not permitted, as the light sources are currently not compliant with New Zealand regulations. Therefore it is illegal to import, sell or fit these conversion bulbs to a vehicle that requires a WOF or COF.

Refer to http://www.nzta.govt.nz and ('Get your lights right')

Comparison between filament bulb (halogen) / light arc gas discharge lamp (Xenon)









Typical light distribution and colour temperature of a light beam with standard halogen bulb.

Typical light distribution and colour temperature of a light beam with HID bulb.

	HALOGEN BULB (H1)	GAS DISCHARGE LAMP (XENON D1S)		
Light source:	Filament	Light arc		
Luminance Flux:	1550 lm	3200 lm		
Luminance:	1450 cd/m ²	3000 cd/m ²		
Capacity:	55W	35W		
Energy balance:	8% light radiation 92% heat radiation	28% light radiation 58% heat radiation 14% UV radiation		
Service life:	Approx. 500 hours	Approx. 2500 hours		
Vibration-proof:	To a certain extent	Yes		
Ignition voltage:	No	Yes 23000V (3rd generation)		
Electronic control:	No	Yes		
Kelvin Temperature (Daylight ± 6000 K)	3200 K	4150 K (Projection system)		

Tips for Dealing with HID Electronic Ballasts

A faulty ballast leads to complete headlight failure. Possible causes for failure of the ballast are:

- → Lack of voltage/ sufficient current supply.
- → Lack of ground connection.
- → Faulty electronics of the device.
- → Internal shortcircuits.

QUICK REFERENCE BULB GUIDE











QUICK REFERENCE UPGRADE BULB GUIDE



COOL BLUE (CB) AND BLUE VISION (BV) - WHITER (UP TO 4200°K)

These bulbs come close to emulating the colour of a Xenon HID lamp. The high colour temperature of the Cool Blue bulbs creates the crisp white light which provides illumination that is conspicuous while being easy on the eye.

UPGRADE BULBS							
Bulb	Category	Part Number		Voltage	Power Consumption	Base	Page
	H1	C1255CB	ADR COMPLIANCE	12V	55W	P14.5s	356
\ n	Н3	YC1255CB	ADR COMPLUANCE	12V	55W	PK22s	357
3	H4	XD1260/55CB	ADR COMPLIANCE	12V	60/55W	P43t	354
1	H7	CA1255CB	ADR COMPLIANCE	12V	55W	PX26d	355
	H11	CG1255CB	ADR COMPLIANCE	12V	55W	PGJ19-2	359
	HB3	CB1265CB	ADR COMPLIANCE	12V	65W	P20d	360
	HB4	CC1255CB	ADR	12V	55W	P22d	360
	T4W	HL124BV	ADR	12V	4W	BA9s	367
	W5W	W125BV	ADR COMPLIANCE	12V	5W	W2.1 x 9.5d	369

COLOUR MATCH HID BULBS (D2R-5K/D2S-5K/D1S-5K) – WHITER (UP TO 5000° K)

As HID bulbs age, the colour temperature increases resulting in a whiter light. These 5K bulbs offer up to 30% more light on the road and a whiter look to match used bulbs. These bulbs are ECE compliant.

D2R	D2R-5K	ADR COMPLIANCE	12/24V	35W	P32d-3	352
D2S	D2S-5K	ADR COMPLIANCE	12/24V	35W	P32d-3	352
D1S	D1S-5K	Campliance ADR COMPLIANCE	12/24V	35W	PK32d-2	353



LONGLIFE (LL) - UP TO TWICE THE LIFE

LongLife (LL) bulbs are increasing in popularity for applications such as taxis and drivers using headlamps during the day. Many new vehicles now come equipped with LongLife bulbs as a standard fitment. The bulbs will provide safe and legal light performance and can be rated at twice or greater the service life of standard bulbs.

Bulb	Category	Part Number		Voltage	Power Consumption	Base	Pag
	H1	C1255LL	ADR COMPLIANCE	12V	55W	P14.5s	356
C) g	H3	YC1255LL	ADR COMPLIANCE	12V	55W	PK22s	357
a	H4	XD1260/55LL	ADR COMPLIANCE	12V	60/55W	P43t	354
1	H7	CA1255LL	ADR COMPLIANCE	12V	55W	PX26d	355
(end K	R5W	G125LL	ADR COMPLIANCE	12V	5W	BA15s	366
	C5W	L125LL	ADR COMPLIANCE	12V	5W	SV8.5-8	370
	P21W	R1221LL	ADR COMPLIANCE	12V	21W	BA15s	364
	P21/5W	S1221/5VLL	ADR COMPLANCE	12V	21/5W	BAY15d	365
	W5W	W125LL	ADR COMPLIANCE	12V	5W	W2.1 x 9.5d	369
-	894	CF1237-894	SAE COMPLIANCE	12V	37.5W	PGJ13	362
1	898	CF1237-898	SAE COMPLIANCE	12V	37.5W	PGJ13	362





XENON (X) - UP TO + 30% BRIGHTER

This bulb outshines a standard headlamp bulb by achieving up to 30% more light on the road in the 50-75m range allowing better orientation and earlier reaction to hazards.

UPGRADE BULBS							
Bulb	Category	Part Number		Voltage	Power Consumption	Base	Page
	H1	C1255X	ADR COMPLIANCE	12V	55W	P14.5s	356
O. B.	H3	YC1255X	ADR COMPLIANCE	12V	55W	PK22s	357
ap -	H4	XD1260/55X	ADR COMPLIANCE	12V	60/55W	P43t	354
1	H7	CA1255X	ADR COMPLIANCE	12V	55W	PX26d	355
J	H11	CG1255X	ADR COMPLIANCE	12V	55W	PGJ19-2	359



XENON ULTRA (XU) - UP TO + 60% BRIGHTER

Xenon Ultra bulbs take lighting even further by providing up to 60% more light on the road than a standard headlamp bulb while emitting a 10-20m longer beam.

UPGRADE BULBS							
Bulb	Category	Part Number		Voltage	Power Consumption	Base	Page
	Н1	C1255XU	ADR COMPLIANCE	12V	55W	P14.5s	356
20 m	H4	XD1260/55XU	ADR COMPLIANCE	12V	60/55W	P43t	354
1	H7	CA1255XU	ADR COMPLIANCE	12V	55W	PX26d	355



HID ULTRA PLUS (UP) - UP TO + 70% BRIGHTER

Ultra Plus bulbs are the ideal bulbs for drivers looking to increase safety with more light on the road. This HID bulb produces up to 70% more light on the road, has a beam that is up to 20 metres longer than a standard bulb.

UPGRADE BULBS							
Bulb	Category	Part Number		Voltage	Power Consumption	Base	Page
	D1S	D1SUP	ADR COMPLIANCE	12V/24V	35W	P32d-2	353
	D2S	D2SUP	ADR COMPLIANCE	12V/24V	35W	PK32d-2	352

Lifetime and performance gains are compared to standard versions of the bulb. Greater performance is measured between 50 and 75m in front of vehicle.



ULTRA PLUS (UP) - UP TO + 110% BRIGHTER

Ultra Plus bulbs are the ideal bulbs for drivers looking to increase safety with more light on the road. This halogen bulb produces up to 110% more light on the road, has a beam that is up to 35 metres longer and provides light that is up to 10% whiter than a standard bulb.

UPGRADE BULBS							
Bulb	Category	Part Number		Voltage	Power Consumption	Base	Page
	Н1	C1255UP	ADR COMPLANCE	12V	55W	P14.5s	356
○\ g	Н3	YC1255UP	ADR COMPLIANCE	12V	55W	PK22s	357
a	H4	XD1260/55UP	ADR COMPLIANCE	12V	60/55W	P43t	354
	H7	CA1255UP	ADR COMPLIANCE	12V	55W	PX26d	355
	HB3	CB1265UP	ADR COMPLIANCE	12V	65W	P20d	360
	HB4	CC1255UP	ADR COMPLIANCE	12V	55W	P22d	360
	H11	CG1255UP	ADR COMPLIANCE	12V	55W	PGJ19-2	359



ULTRA MAX (UM) - UP TO + 130% BRIGHTER

Ultra Max bulbs are the ultimate upgrade bulb for drivers desiring the best performance from an approved bulb. This halogen bulb produces up to 130% more light on the road, and has a beam that is up to 40 metres longer and up to 20% whiter combining a highly engineered filament, pure xenon gas filling and innovative laser processing technology.

UPGRADE BULBS							
Bulb	Category	Part Number		Voltage	Power Consumption	Base	Page
	H4	XD1260/55UM	ADR COMPLIANCE	12V	60/55W	P43t	354
	H7	CA1255UM	ADR COMPLIANCE	12V	55W	PX26d	355



TS PRO - UP TO 2.5 TIMES THE LIFETIME AND 100% MORE LIGHT ON THE ROAD (HALOGEN BULBS).


At night, truck drivers need the best possible light on the road ahead. TS Pro out-performs conventional 24V bulbs, allowing drivers to concentrate on the essentials. With their extremely long life and robust construction, these bulbs save on replacements and downtime, reducing fleet costs

UPGRADE BULBS							
Bulb	Category	Part Number		Voltage	Power Consumption	Base	Page
456	H1	C2470TS	ADR COMPLIANCE	24V	70W	P14.5s	356
O. g.	Н3	YC2470TS	ADR COMPLIANCE	24V	70W	PK22s	357
a()	H4	XD2475/70TS	ADR COMPLIANCE	24V	75/70W	P43t	354
	H7	CA2470TS	ADR COMPLIANCE	24V	70W	PX26d	355
The state of the s	H11	CG2470TS	ADR COMPLIANCE	24V	70W	PGJ19-2	359
	P21/5W	S2421/5-TS	ADR COMPLIANCE	24V	21/5W	BAY15d	365
(cont	R5W	G245-TS	ADR COMPLIANCE	24V	5W	BA15s	366
(cont	R10W	G2410-TS	ADR COMPLIANCE	24V	10W	BA15s	366
× ×	T4W	HL244-TS	ADR COMPLIANCE	24V	4W	BA9s	367
	P21W	R2421-TS	ADR COMPLIANCE	24V	21W	BA15s	364
	PY21W	RY2421-TS	ADR COMPLIANCE	24V	21W	BAU15s	364









D2 - COLOUR MATCH BULBS							
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category			
D2R	12/24V	35W	P32d-3	D2R			
D2R-5K White	12/24V	35W	P32d-3	D2R			






D2S		12/24V	35W	P32d-2	D2S	
D2SUP	Plus 70%	12/24V	35W	P32d-2	D2S	
D2S-5K	Whiter	12/24V	35W	P32d-2	D2S	

See page 347 for further information on colour match bulbs (5K). See page 121 for information on power packs and ballast leads.






D4S							
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category			
D4S	12/24V	35W	P32d-5	D4S			



AUTOMOTIVE BULBS





D1					
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category	
D1R	12/24V	35W	PK32d-3	D1R	



P/N D1R








P/N D1S-5K



P32d-2 P/N D1S/D1SUP



P32d-2 P/N D1S-5K



D1S		12/24V	35W	PK32d-2	D1S	
D1SUP	Plus 70%	12/24V	35W	PK32d-2	D1S	
D1S-5K	Whiter	12/24V	35W	PK32d-2	D1S	

See page 121 for information on power packs and ballast leads.



D3S					
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category	
D3S	12/24V	35W	PK32d-5	D3S	



BASE CODING (VIEWED FROM TOP SIDE) PK32d-2 PK32d-3 PK32d-5




P/N XD1260/55UP



P/N XD1260/55XU




P/N XD2475/70



HALOGEN BULBS - H4 12 VOLT							
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category			
XD1260/55	12V	60/55W	P43t	H4 I			
XD1260/55-BULK	12V	60/55W	P43t	H4			
XD1260/55LL LongLife	12V	60/55W	P43t	H4			
XD1260/55X Plus 30%	12V	60/55W	P43t	H4			
XD1260/55X-BULK Plus 30%	12V	60/55W	P43t	H4			
XD1260/55XU Plus 60%	12V	60/55W	P43t	H4			
XD1260/55UP Plus 110%	12V	60/55W	P43t	H4			
XD1260/55UM Plus 130%	12V	60/55W	P43t	H4	-		
XD1260/55CB Whiter	12V	60/55W	P43t	H4 I			
XD12100/90	12V	100/90W	P43t				
XD12100/90-BULK	12V	100/90W	P43t	_			

HALOGEN BULBS - H4 24 VOLT								
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category				
XD2475/70	24V	75/70W	P43t	H4				
XD2475/70-BULK	24V	75/70W	P43t	H4				
XD2475/70TS (TS Pro	24V	75/70W	P43t	H4				
XD2475/70TSBULK (TS Pro	24V	75/70W	P43t	H4				
XD24100/90	24V	100/90W	P43t					
XD24100/90-BULK	24V	100/90W	P43t					
Bulk packs supplied in single ca	artons.							







HALOGEN BULBS - H7 12 VOLT								
Part Number		Voltage	Power Consumption	Base	ADR 51/00 Category			
CA1255		12V	55W	PX26d	H7			
CA1255-BULK		12V	55W	PX26d	H7			
CA1255LL	LongLife	12V	55W	PX26d	H7	-		
CA1255X	Plus 30%	12V	55W	PX26d	H7			
CA1255XU	Plus 60%	12V	55W	PX26d	H7			
CA1255UP	Plus 110%	12V	55W	PX26d	H7			
CA1255UM	Plus 130%	12V		PX26d	H7			
CA1255CB	Whiter	12V	55W	PX26d	H7			

HALOGEN BULBS - H7 24 VOLT							
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category			
CA2470	24V	70W	PX26d	H7			
CA2470-BULK	24V	70W	PX26d	H7			
CA2470TS TSF	24V	70W	PX26d	H7			
CA2470TS-BULK TSF	24V	70W	PX26d	H7			
Bulk packs supplied in sing	Bulk packs supplied in single cartons.						








P/N C1255



P/N C1255UP




P/N C1255CB



HALOGEN BULBS - H1 12 VOLT								
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category				
C1255	12V	55W	P14.5s	Н1				
C1255-BULK	12V	55W	P14.5s	H1				
C1255LL LongL	ife 12V	55W	P14.5s	H1	-			
C1255X Plu	12V	55W	P14.5s	H1				
C1255XU	12V	55W	P14.5s	Н1				
C1255UP	12V	55W	P14.5s	H1				
C1255CB White	12V	55W	P14.5s	Н1				
C12100	12V	100W	P14.5s					

HALOGEN BULBS - H1 24 VOLT								
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category				
C2470	24V	70W	P14.5s	H1				
C2470-BULK	24V	70W	P14.5s	H1				
C2455	24V	55W	P14.5s					
C2455-BULK	24V	55W	P14.5s					
C2470TS TS Pro	24V	70W	P14.5s	H1				
C2470TS-BULK TS Pro	24V	70W	P14.5s	H1				
C24100	24V	100W	P14.5s					
C24100-BULK	24V	100W	P14.5s	•				
Bulk packs supplied in single	cartons.							



HALOGEN BULBS - H3 12 VOLT								
Part Number		Voltage	Power Consumption	Base	ADR 51/00 Category			
YC1255		12V	55W	PK22s	Н3			
YC1255-BULK		12V	55W	PK22s	НЗ			
YC1235		12V	35W	PK22s				
YC1255LL	LongLife	12V	55W	PK22s	Н3			
YC1255X	Plus 30%	12V	55W	PK22s	НЗ			
YC1255UP	Plus 110%	12V	55W	PK22s	НЗ			
YC1255CB	Whiter	12V	55W	PK22s	НЗ			
YC12100		12V	100W	PK22s				
YC12100-BULK		12V	100W	PK22s				



P/N YC1255UP

HALOGEN BULBS - H3 24 VOLT							
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category			
YC2470	24V	70W	PK22s	Н3			
YC2470-BULK	24V	70W	PK22s	НЗ			
YC2455	24V	55W	PK22s				
YC2455-BULK	24V	55W	PK22s				
YC2470TS (TS Pro	24V	70W	PK22s	Н3			
YC2470TS-BULK (TS Pro	24V	70W	PK22s	H3			
YC24100	24V	100W	PK22s				
YC24100-BULK	24V	100W	PK22s				
Bulk packs supplied in single cartons.							



P/N YC2470TS



HALOGEN BULBS - H2							
Voltage	Power Consumption	Base	ADR 51/00 Category				
12V	55W	X511	H2				
24V	70W	X511	H2				
	12V	12V 55W	12V 55W X511	12V 55W X511 H2			




P/N CD2470










HALOGEN BULBS - H8							
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category			
CE1235	12V	35W	PGJ19-1	H8			




P/N CF1265





HALOGEN BULBS - H9					
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category	
CF1265	12V	65W	PGJ19-5	Н9	







HALOGEN BULBS - H10							
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category			
CH1242	12V	42W	PY20d	H10			





HALOGEN BULBS - H11								
Part Number		Voltage	Power Consumption	Base	ADR 51/00 Category			
CG1255		12V	55W	PGJ19-2	H11			
CG1255X	Plus 30%	12V	55W	PGJ19-2	H11			
CG1255UP	Plus 110%	12V	55W	PGJ19-2	H11			
CG1255CB	Whiter	12V	55W	PGJ19-2	H11			
CG2470		24V	70W	PGJ19-2	H11			
CG2470TS	TS Pro	24V	70W	PGJ19-2	H11			



P/N CG1255



P/N CG1255UP




P/N CG1255CB









HALOGEN BULBS - HB3 (9005)									
Part Number		Voltage	Power Consumption	Base	ADR 51/00 Category				
CB1265		12V	65W	P20d	HB3				
CB1265UP	Plus 110%	12V	65W	P20d	HB3				
CB1265CB	Whiter	12V	65W	P20d	HB3				







HALOGEN BULBS - HB4 (9006)									
Part Number	Part Number Volta		Power Consumption	Base	Base ADR 51/00 Category				
CC1255		12V	55W	P22d	HB4				
CC1255UP	Plus 110%	12V	55W	P22d	HB4				
CC1255CB	Whiter	12V	55W	P22d	HB4				




P/N CI1255



HALOGEN BULBS - H1R2								
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category				
CI1255	12V	55W	PX22d	HIR2				

AUTOMOTIVE BULBS



DAYTIME RUNNING LAMP AND FOG LAMP BULB - H15							
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category			
XH1215/55	12V	15/55W	PGJ23t-1	H15			



P/N XH1215/55



HALOGEN BULBS - H16							
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category			
CF1219	12V	19W	PGJ19-3	H16			




P/N CF1219



P/Ns CF1237-862, CF1237-894, CF1250-886, CF1227-889.



P/N CF1227-880 P/N CF1227-881



P/N CF1227-889



P/N CF1227-890

Part Number	Picture	Voltage	Power Consumption	Base	ADR 51/00 Category	
CF1227-880	4	12V	27W	PG13	880	
CF1227-881	2	12V	27W	PGJ13	881	
CF1227-889	1	12V	27W	PGJ13	889	
CF1227-890	3	12V	27W	PG13	890	



P/Ns CF1227-881, CF1227-H27W/2, CF1237-896, CF1237-898.



P/N CF1227-H27W/1



P/N CF1227-H27W/2

CF1227-H27W/1	4	12V	27W	PG13	H27W/1	
CF1227-H27W/2	2	12V	27W	PGJ13	H27W/2	



P/N CF1250-885



P/Ns CF1227-890



P/N CF1237-862/894



P/N CF1237-893



P/N CF1237-896/898

CF1237-862	1	12V	37.5W	PGJ13	862	
CF1237-893	4	12V	37.5W	PG13	893	
CF1237-894 LongL	fe 1	12V	37.5W	PGJ13	894	
CF1237-896	2	12V	37.5W	PGJ13	896	
CF1237-898 (LongL	<u>fe</u> 2	12V	37.5W	PGJ13	898	

4.



Figures 3 and 4 configuration



P/N CF1250-885




P/N CF1250-886

CF1250-885	3	12V	50W	PG13	885	
CF1250-886	1	12V	50W	PGJ13	886	




AUTOMOTIVE BULBS





HALOGEN HEADLAMP BULBS								
Part Number	Voltage Power Consumption		Base	ADR 51/00 Category				
XE1260/55	12V	60/55W	P45t-41					
XE2475/70	24V	70/75W	P45t-41					









HEADLAMP BULBS					
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category	
A1245/40	12V	45/40W	P45t-41	R2	
A2455/50	24V	55/50W	P45t-41	R2	













-









P/N RY1221









OTOI EAMI				
Voltage	Power Consumption	Base	ADR 51/00 Category	
12V	21W	BA15s	P21W	-
12V	21W	BA15s	P21W	
12V	21W	BA15s	P21W	
12V	21W	BAU15s	PY21W	
12V	21W	BAU15s	PY21W	
24V	18W	BA15s		
24V	21W	BA15s	P21W	
24V	21W	BA15s	P21W	
24V	21W	BA15s	P21W	
24V	21W	BAU15s	PY21W	
24V	21W	BAU15s	PY21W	
	12V 12V 12V 12V 12V 24V 24V 24V 24V	12V 21W 12V 21W 12V 21W 12V 21W 12V 21W 12V 21W 24V 21W 24V 21W 24V 21W 24V 21W 24V 21W	Voltage Power Consumption Base 12V 21W BA15s 12V 21W BA15s 12V 21W BAU15s 12V 21W BAU15s 12V 21W BAU15s 24V 18W BA15s 24V 21W BAU15s	Voltage Power Consumption Base ADR 51/00 Category 12V 21W BA15s P21W 12V 21W BA15s P21W 12V 21W BA15s P21W 12V 21W BAU15s PY21W 12V 21W BAU15s PY21W 24V 18W BA15s P21W 24V 21W BAU15s PY21W



P/N FD1221






Bulk bulbs (other than Halogen) are sold in packs of 10.

FD1221 12V 21W BA15d P21W








BAYONET HALOGEN INDICA	ATOR AND S	TOP LAMP BULBS			
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category	
RQ1221	12V	21W	BAY9s	H21W	
RQ2421	24V	21W	BAY9s	H21W	


P/N S1221/5V








BAYONET STOP AND TA	L LAMP BULB	S			
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category	
S1221/5V	12V	21/5W	BAY15d	P21/5W	
S1221/5V-BULK	12V	21/5W	BAY15d	P21/5W	
S1221/5VLL LongLi	12V	21/5W	BAY15d	P21/5W	
					-
S2421/5V	24V	21/5W	BAY15d	P21/5W	
S2421/5V-BULK	24V	21/5W	BAY15d	P21/5W	
S2421/5-TS TS Pro	24V	21/5W	BAY15d	P21/5W	
Bulk bulbs (other than Halog	gen) are sold in pa	acks of 10.			





BAYONET EUROPEAN STOR	P AND TAIL I	AMP BULBS			
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category	
SZ1221/4	12V	21/4W	BAZ15d	P21/4W	-





PLASTIC BASED BULBS					
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category	
WP1227	12V	27W	W2.5 x 16d	P27W	
WP1227/7	12V	27/7W	W2.5 x 16q	P27/7W	
WPA1227/7	12V	27/7W	W2.5 x 16q	PY27/7W	





P/N WP1227/7 P/N WPA1227/7





P/N G125





REAR POSITION, MARKER	AND CLEAR	ANCE BULBS		
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category
G125	12V	5W	BA15s	R5W
G125-BULK	12V	5W	BA15s	R5W
G125LL LongLife	12V	5W	BA15s	R5W 🕋
G1210	12V	10W	BA15s	R10W
G1210-BULK	12V	10W	BA15s	R10W
	-			
G245	24V	5W	BA15s	R5W 📥
G245-BULK	24V	5W	BA15s	R5W
G245-TS TS Pro	24V	5W	BA15s	R5W
G2410	24V	10W	BA15s	R10W
G2410-BULK	24V	10W	BA15s	R10W
G2410-TS TS Pro	24V	10W	BA15s	R10W
Bulk bulbs (other than Halogen	are sold in pa	rks of 10		

Bulk bulbs (other than Halogen) are sold in packs of 10.



P/N GD125







GD125	12V	5W	BA15d	R5W	
GD245	24V	5W	BA15d	R5W	

AUTOMOTIVE BULBS



P/Ns HL124, HL124BV, HL244, H126



P/Ns H122, H123, H242







P/N HL124BV



1.

2.



PILOT/DASH BULBS						
Part Number	Picture	Voltage	Power Consumption	Base	ADR 51/00 Category	
HL124	1	12V	4W	BA9s	T4W	
HL124-BULK	1	12V	4W	BA9s	T4W	
HL124BV Whiter	2	12V	4W	BA9s	T4W	
HL244	1	24V	4W	BA9s	T4W	
HL244-BULK	1	24V	4W	BA9s	T4W	
HL244-TS TS Pro	1	24V	4W	BA9s	T4W	
HL247	1	24V	7W	BA9s		-

H122	3	12V	2W	BA9s	
H123	3	12V	3W	BA9s	
H123-BULK	3	12V	3W	BA9s	
H126	1	12V	6W	BA9s	
H126-BULK	1	12V	6W	BA9s	
H242	1	24V	2W	BA9s	
H242-BULK	1	24V	2W	BA9s	
Bulk bulbs (other than Halog	gen) are sold	in packs of	10.		

LED RETROFITS					
Part Number	Voltage	Power Consumption	Base		
HLLED124	12V	1W	BA9s		
HLLED124-WW	12V	1W	BA9s		



P/N HLLED124





P/N CAP1221

P/N CAPY1221







Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category	
CAP1221	12V	21W	W3 x 16d	W21W	
CAP1221-BULK	12V	21W	W3 x 16d	W21W	
CAPY1221	12V	21W	W3 x 16d	WY21W	
CAP1221/5	12V	21/5W	W3 x 16q	W21/5W	
CAP1221/5-BULK	12V	21/5W	W3 x 16q	W21/5W	



P/N WBL122



W121.2	12V	1.2W	W2 x 4.6d	E
W121.2-BULK	12V	1.2W	W2 x 4.6d	
WBL122	12V	2W	W2 x 4.6d	E
WS122	12V	2W	W2 x 4.6d	_
W241.2	24V	1.2W	W2 x 4.6d	5
W241.2-BULK	24V	1.2W	W2 x 4.6d	_
WS242	24V	2W	W2 x 4.6d	_

368







WEDGE BASE BULBS							
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category			
W122	12V	2W	W2.1 x 9.5d				
W123	12V	3W	W2.1 x 9.5d	W3W			
W125	12V	5W	W2.1 x 9.5d	W5W			
W125-BULK	12V	5W	W2.1 x 9.5d	W5W			
W125LL LongLife	12V	5W	W2.1 x 9.5d	W5W			
W125BV Whiter	12V	5W	W2.1 x 9.5d	W5W			
WY125	12V	5W	W2.1 x 9.5d	WY5W			
W242-BULK	24V	2W	W2.1 x 9.5d				
W243	24V	3W	W2.1 x 9.5d	W3W			
W245	24V	5W	W2.1 x 9.5d	W5W			
W245-BULK	24V	5W	W2.1 x 9.5d	W5W			
Bulk bulbs (other than Halogen) are sold in pa	acks of 10.					



P/N W122



P/N W125BV



P/N WY125





P/N W1216

WS1212	12V	12W	W2.1 x 9.5d		-
W1216	12V	16W	W2.1 x 9.5d	W16W	
W1221	12V	21W	W2.1 x 9.5d		



LED RETROFITS			
Part Number	Voltage	Power Consumption	Base
WLED125	12V	1W	W2.1x9.5d
WLED125-WW	12V	1W	W2.1x9.5d





P/N K1221




P/N K2410





P/N L125LL














FESTOON BULBS								
Part Number	Diagram	Voltage	Power Consumption	Base	ADR 51/00 Category			
K1210	2	12V	10W	SV8.5-8				
K1210-BULK	2	12V	10W	SV8.5-8				
K1221	1	12V	21W	SV8.5-8	C21W			
K1221-BULK	1	12V	21W	SV8.5-8	C21W			
K2410	2	24V	10W	SV8.5-8				
K2410-BULK	2	24V	10W	SV8.5-8				
K2421	1	24V	21W	SV8.5-8				
K2421-BULK	1	24V	21W	SV8.5-8				
L125	3	12V	5W	SV8.5-8	C5W			
L125-BULK	3	12V	5W	SV8.5-8	C5W			
L125LL LongLife	3	12V	5W	SV8.5-8	C5W			
L1210	3	12V	10W	SV8.5-8				
L245	3	24V	5W	SV8.5-8	C5W			
L245-BULK	3	24V	5W	SV8.5-8	C5W			
L2410	3	24V	10W	SV8.5-8		-		
L2410-BULK	3	24V	10W	SV8.5-8				

7	8 - 28
SV7-8	M123

M123	12V	3W	SV7-8	
M123-BULK	12V	3W	SV7-8	
M243	24V	3W	SV7-8	
M243-BULK	24V	3W	SV7-8	



N1210	12V	10W	SV8.5-8	
N1210-BULK	12V	10W	SV8.5-8	
Bulk bulbs (other than Haloge				






MINIATURE BULBS						
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category		
J122	12V	2W	BA7s			
J243	24V	3W	BA7s			





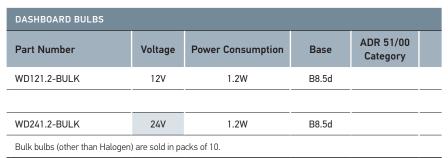



P/N WD121.2-BULK

LED RETROFITS					
Part Number	Voltage	Power Consumption	Base		
LLED125	12V	1W	SV8.5-8		
LLED125-WW	12V	1W	SV8.5-8		







P/N YL125








HALOGEN/INTERIOR BULBS							
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category			
YL125	12V	5W	BA9s				
YL126	12V	6W	BAX9s	H6W			
YL1210	12V	10W	BA9s				
YL1220	12V	20W	BA9s				






YM125	12V	5W	G4	
YM1210	12V	10W	G4	
YM1220	12V	20W	G4	
YM2410	24V	10W	G4	
YM2420	24V	20W	G4	



P/N U1245





SPECIAL BULBS FOR EMERGENCY FLASHER AND REVOLVING LAMPS												
Part Number	Voltage	Power Consumption	Base	ADR 51/00 Category								
U1245	12V	45W	BA15s									
U2445	24V	45W	BA15s									









STROBE TUBES				
Part Number	Voltage	Power Consumption	Base	To Suit
XN000	12-72V	2 Joules	Circuit Board	Firebolt
XN451	12-48V	8 Joules	Circuit Board	Pulsator 451







P/N XN451

The following pages are a guide to mounting HELLA lamps in compliance with the Australian Design Rules (ADR). The diagrams in this section are intended as a general guide only, for exact mounting specifications please refer to ADR 13/00.



A quick reference



1. Find the product that fulfils your illumination requirement.



2. Check for the ADR symbol on the product page to ensure it's compliant.

HELLA	Engineering Grawing No.	ADE NO.	Function
Fari No.		18/00	Number Plate Lamp
2550	001385-28		Number Plate Lamp
2551	001384-29	48/00	Number Plate Lamp
	951088-02	48/00	
2553	950921-00	48/00	Number Plate Lamp
2554		48/00	Number Plate Lamp
2555	001369-10		Number Plate Lame
	000017.53	48/00	

3. Look up the part number on the chart on page 378 for complete ADR information.

Simpler ADR Compliance

The 3rd edition ADR covers all vehicles and trailers, even those not subject to registration requirements such as very light trailers or 'box' trailers.

To simplify the ADR approval process for smaller manufacturers and individual home-builders, HELLA has made a consolidated Summary

of Evidence (SE) submission to the Federal Office of Road Safety (FORS). This submission covers all HELLA products that comply with 3rd Edition ADRs.

This catalogue lists both the HELLA and FORS Component Registration Numbers (CRN) beside each item in a quick reference ADR application

chart in this section (page 378). HELLA provides specific ADR related lamp orientation and mounting requirements to enable customers requiring ADR compliance to simply quote the relevant CRN to the authorities (who maintain a central register), rather than undertake detailed SE submissions for each lamp function.

REAR

1 ADR 49/00

ADR 48/00

ADR 6/00: Cat.2

ADR 49/00

ADR 49/00

ADR 47/00

ADR 1/00

Rear End Outline Lamps Number Plate Lamps

Rear Direction Indicators

Rear Position Lamps

Stop Lamps

Rear Retro Reflectors

Reversing Lamps

SIDE

8 ADR 47/00

Side Retro Reflectors

ADR 45/01 or 74/00 Side Markers

ADR 6/00

Supplementary Side Direction Indicators

FRONT

11 ADR 49/00

ADR 45/01

ADR 6/00: Cat.1

ADR 50/00

ADR 46/00

ADR 49/00

ADR 47/00

ADR 76/00

Headlamps Front Position Lamps

Front End Outline Lamps

Front Direction Indicators


Front Fog Lamps (optional)

Cab Markers (optional)


Front Retro Reflectors

Daytime Running Lamps (optional)


SMALL TRUCK

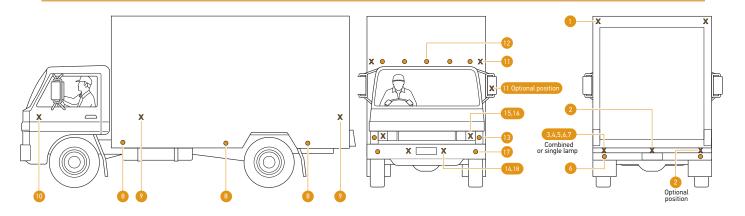

SINGLE TRAILER

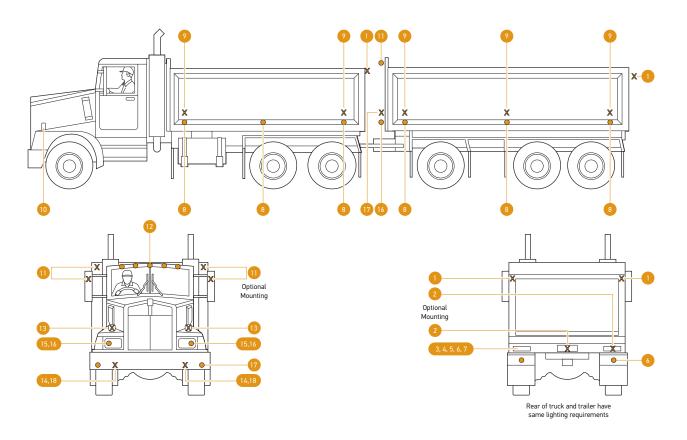

SEMI TRAILER

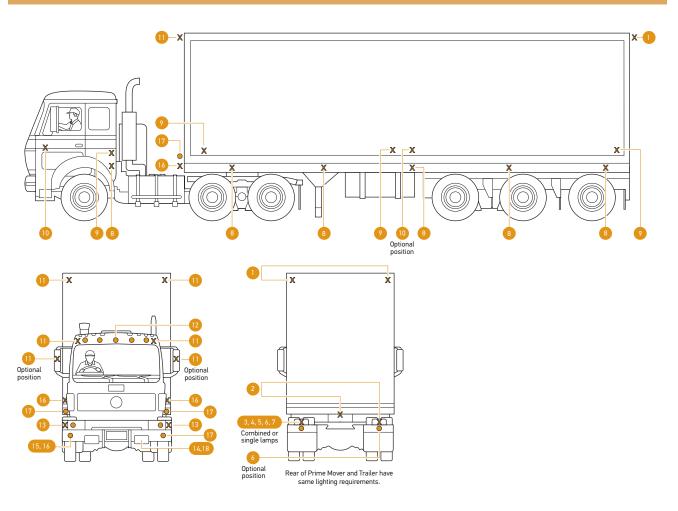

REAR

ADR 49/00 Rear End Outline Lamps
 ADR 48/00 Number Plate Lamps
 ADR 6/00: Cat.2 Rear Direction Indicators
 ADR 49/00 Rear Position Lamps

5 ADR 49/00 Stop Lamps

6 ADR 47/00 Rear Retro Reflectors
7 ADR 1/00 Reversing Lamps

SIDE

8 ADR 47/00 Side Retro Reflectors
9 ADR 45/01 or 74/00 Side Markers

10 ADR 6/00 Supplementary Side Direction Indicators

FRONT


11 ADR 49/00 Front End Outline Lamps
 12 ADR 45/01 Cab Markers (optional)
 13 ADR 6/00: Cat.1 Front Direction Indicators
 14 ADR 50/00 Front Fog Lamps (optional)

15 ADR 46/00 Headlamps


ADR 49/00 Front Position Lamps
ADR 47/00 Front Retro Reflectors

18 ADR 76/00 Daytime Running Lamps (optional)


COACH

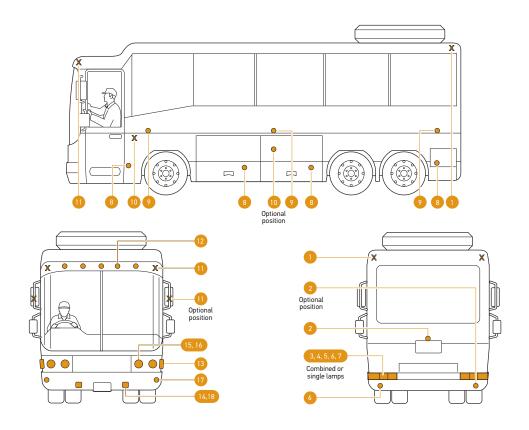


SMALL TRAILER

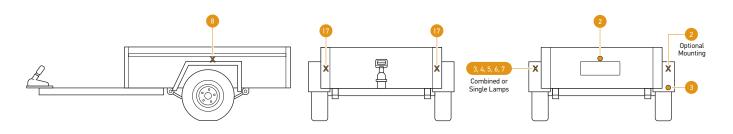


CARAVAN

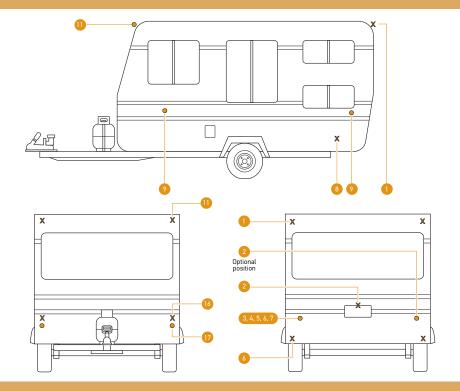

BOAT TRAILER

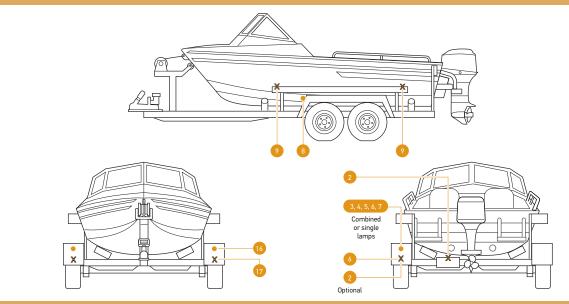

HORSE FLOAT

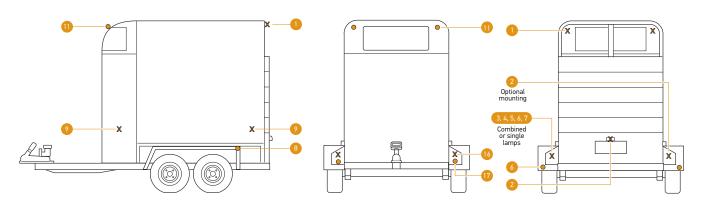

HELLA Part No.	Engineering Drawing No.	ADR No.	Function	Bulb(s)	Bulb Type	HELLA Ref. or ECE	FORS Ref: CRN or ECE	Instruction Sheet No.	Lamp Identification
1000	012614-00	76/00	Daytime Running Lamp	R1221	P21W	DRL*1000*B	27424	911-353-51	RL 008701
		6/00:Cat 1	Front Direction Indicator Lamp	R1221	P21W	FL*1001*A	15230		016086
1001	950957-00	46/00	Headlamp	XD1260/55	H4	HL*1001*A	15232	911-351-00	(Turn Signal)
		49/00	Front Position Lamp	HL124	T4W	FP*1001*A	15231		17031R20 (Headlamp)
1003	980608-50	76/00	Daytime Running Lamp	LED	N/A LED	DRL*1003*A	41607	980-703-11	9060
1004	980670-00 980670-80	76/00	Daytime Running Lamp	LED	N/A LED	N/A ECE	E24 87R-000002	980-703-10	E24 0002 (0670)
1005	980680-00	76/00	Daytime Running Lamp	LED	N/A LED	N/A ECE	E24 87R-000001	980-703-12	E24 0001 (0680)
1005-24V	980680-50	E./ (00	D D		N/4 L 50	DDI #400 /#4	10710	980-703-24	(0000)
1006	980690-50	76/00	Daytime Running Lamp	LED	N/A LED	DRL*1006*A	42763	980-703-47	0690
		49/00	Front Position Lamp	LED	N/A LED	FP*1006*A	42762		
1007-24V	980690-40	76/00	Daytime Running Lamp	LED	N/A LED	N/A ECE	E24 5854	980-703-53	0690
		49/00	Front Position Lamp	LED	N/A LED	N/A ECE	E24 5854		
1008	980680-11	76/00	Daytime Running Lamp	LED	N/A LED	N/A ECE	E24 87R-000001	980-703-68	E24 0001 (0680)
1008-24V	980680-61							980-703-69	(0000)
1009	980880-00	76/00	Daytime Running Lamp	LED	N/A LED	DRL*1009*A	44200	958-780-04	0880
1009-24V	980880-10					DRL*1009-24V*A	44202		
1009V	980880-40	76/00	Daytime Running Lamp	LED	N/A LED	1009V*DRL*C	45962	958-780-92	0880 B
1009V-24V	980880-50		3 1			1009V-24V*DRL*C	45965	958-780-92	
1013	980970-00	76/00	Daytime Running Lamp	LED	N/A LED	DRL*1013*A	44776	958-780-44	0970
1013-24V	980970-50	70,00	Daytime Running Lamp	LLD	N/A LLD	DRL*1013-24V*A	44783	730-700-44	0770
1027	002/2/ 10	46/00	Headlamp	XD1260/55	H4	HL*1027*A	15311	911-352-79	17016
1027	003434-18	49/00	Front Position Lamp	HL124	T4W	FP*1027*A	15317		
1041	003177-06	46/00	Headlamp	C1255	H1	HL*1041*A	15071	911-351-06	24504
1042	003177-30	46/00	Headlamp	XD1260/55	H4	HL*1042*A	15072	911-351-07	7197R20
		46/00	Headlamp	XD1260/55	H4	HL*1043*A	15198		
1043	003427-04	49/00	Front Position Lamp	HL124	T4W	FP*1043*A	15197	911-351-08	17009
		46/00	Headlamp	XD1260/55	H4	HL*1044*A	15073		
1044	003177-51	49/00	Front Position Lamp	HL124	T4W	FP*1044*A	15074	911-351-10	7197R20
1052	11/155 00							011 251 17	1////D0
1053	114155-00	46/00	Headlamp	C1255	H1	HL*1053*A	15075	911-351-14	14464R8
1054	114178-00	46/00	Headlamp	C1255	H1	HL*1054*A	15092	911-351-15	7076R8
		49/00	Front Position Lamp	HL124	T4W	FP*1054*A	15093		
1055 &	002850-06 &	46/00	Headlamp	XD1260/55	H4	HL*1055*A	15088	911-351-16	17031R20
1055HD	002850-21	49/00	Front Position Lamp	HL124	T4W	FP*1055*A	15089		
1056	002395-84	46/00	Headlamp	XD1260/55	H4	HL*1056*A	15094	911-351-17	53
		49/00	Front Position Lamp	HL124	T4W	FP*1056*A	15095		
1056LED	958307-00	46/00	Headlamp	LED	N/A LED	N/A ECE	HCR PL 01 E11 12.5 7581	958-315-63	01 E11 12.5 7581
1058 &	002395-13	46/00	Headlamp	XD1260/55	H4	HL*1058*A	15096	011 051 10	E2
1058HD	(950519-00) & 002395-26	49/00	Front Position Lamp	HL124	T4W	FP*1058*A	15097	911-351-18	53
		46/00	Headlamp				1001:		
1058LED	958307-01	49/00	Front Position Lamp	LED	N/A LED	N/A ECE	A02 HCR 01 PL RL 00 E11 12.5	958-315-63	00 E11 12.5
		76/00	Daytim Running Lamp				6081		6081
1108	005750-64	50/00	Front Fog Lamp	YC1255	H3	FF*1108*A	15137	911-351-30	18213R19
1109	005700-42	50/00	Front Fog Lamp	YC1255	H3	FF*1109*A	15137	911-351-31	18216R19
1110	005700-42	50/00		YC1255	H3	FF1110*A	15134	911-351-32	18227
			Front Fog Lamp						
1111	006300-07	50/00	Front Fog Lamp	YC1255	H3	FF*1111*A	15255	911-351-33	18231
1112	007891-00	50/00	Front Fog Lamp	YC1255	H3	FF*1112*A	21581	911-353-28	02 B 650 E1
1113	007893-00	50/00	Front Fog Lamp	YC1255	H3	FF*1113*A	21577	911-353-30	02 B 645 E1
1114	007892-00	50/00	Front Fog Lamp	YC1255	H3	FF*1114*A	21492	911-353-32	02 B 648 E1
1115	008090-00	50/00	Front Fog Lamp	YC1255	H3	FF*1115*A	28414	911-353-38	02 B E1 877
1118	008773-03	50/00	Front Fog Lamp	CA1255	H7	FF*1118*A	31991	911-353-83	1689
1122	008283-00	50/00	Front Fog Lamp	CA1255	H7	FF*1122*A	26829	911-353-45	021209
1123	008284-00	50/00	Front Fog Lamp	CA1255	H7	FF*1123*A	26830	911-353-47	021211
1124	001951-10	50/00	Front Fog Lamp	YC1255	Н3	N/A ECE	03B E1 3221	HKG 460 845-16 & Refer ADR 13/00	E1 3221 R19

HELLA Part No.	Engineering Drawing No.	ADR No.	Function	Bulb(s)	Bulb Type	HELLA Ref. or ECE	FORS Ref: CRN or ECE	Instruction Sheet No.	Lamp Identification
1125	001952-10	50/00	Front Fog Lamp	YC1255	НЗ	N/A ECE	03B E1 3222	HKG 460 845-16 & Refer ADR 13/00	E1 3222 R19
1126	001953-10	50/00	Front Fog Lamp	YC1255	НЗ	N/A ECE	03B E1 3223	HKG 460 845-16 & Refer ADR 13/00	E1 3223 R19
1304	956327-01	46/00	High Beam Headlamp	CD1255	H2	HL*1304*A	15115	911-351-40	24462R8
1307	956329-01	46/00	High Beam Headlamp	YC1255	Н3	HL*1307*A	15121	911-351-42	24556R8
1308	005750-10	46/00	High Beam Headlamp	YC1255	H3	HL*1308*A	15139	911-351-43	0444404R8
1309	005700-11	46/00	High Beam Headlamp	YC1255	H3	HL*1309*A	15132	911-351-44	0444410R8
1310	005860-23	46/00	High Beam Headlamp	YC1255	H3	HL*1310*A	15220	911-351-45	044442
1311	006300-12	46/00	High Beam Headlamp	YC1255	H3	HL*1311*A	15254	911-351-46	0444444
1311-BLUE	006300-26								
1312	007891-01	46/00	High Beam Headlamp	YC1255	H3	HL*1312*A	21582	911-353-29	17.5 E1 651 04 HR
1313	007893-02	46/00	High Beam Headlamp	YC1255	H3	HL*1313*A	21515	911-353-31	37.5 E1 646 04 HR
1314	007892-01	46/00	High Beam Headlamp	YC1255	Н3	HL*1314*A	21484	911-353-33	17.5 E1 649 04 HR
1322	008283-01	46/00	High Beam Headlamp	CA1255	H7	HL*1322*A	26822	911-353-44	041210
1323	008284-01	46/00	High Beam Headlamp	CA1255	H7	HL*1323*A	26823	911-353-46	041212
1324	001951-00	46/00	High Beam Headlamp	YC1255	H3	N/A ECE	HR 01 12.5 E1 3221	HKG 460 845-16 & Refer ADR 13/00	E1 3221 R112
1325	001952-00	46/00	High Beam Headlamp	YC1255	НЗ	N/A ECE	HR 01 17.5 E1 3222	HKG 460 845-16 & Refer ADR 13/00	E1 3222 R112
1326	001953-00	46/00	High Beam Headlamp	YC1255	Н3	N/A ECE	HR 01 12.5 E1 3223	HKG 460 845-16 & Refer ADR 13/00	E1 3223 R112
1358LED	958307-02	46/00	High Beam Headlamp	LED	N/A LED	N/A ECE	E11 30 01 7501	958-315-65	E11 30 01 7501
40//0 BLUE	0075 (0.00	46/00	High Beam Headlamp	C1255	H1	HL*1376HB*A	36324	011 055 00	1000
1366C-BLUE	007560-32	49/00	Front Position Lamp	W125	W5W	FP*1376HB*A	36325	911-355-08	1928
1366C	007560-21	46/00	High Beam Headlamp	C1255	H1	HL*1377*A	32429		1753
	007300-21	49/00	Front Position Lamp	LED	N/A LED	FP*1377*A	32433		
1369	010119-01	46/00	High Beam Headlamp	C1255	H1	HL*1378*A	33671	HKG 460 719-11 & Refer ADR 13/00	00 1901
1378	009094-02	///00	III I D	01055	111	LII +1 270+A	22/81	011 050 07	00.1001
1378CHROME	009094-03	46/00	High Beam Headlamp	C1255	H1	HL*1378*A	33671	911-353-94	00 1901
1379C	009094-04	46/00	High Beam Headlamp	C1255	H1	HL*1379*A	34093	911-353-95	02 1901
		49/00	Front Position Lamp	LED	N/A LED	FP*1379*A	34098		
1382	009094-141	77/00	High Beam Headlamp	XN4001	D1S	HL*1382*B	36044	911-355-07	02 2087
1384	009094-311	77/00	High Beam Headlamp	XN4001	D1S	N/A ECE	E1 002087	HKG 460 818-21 & Refer ADR 13/00	E1 002087
1389	011002-001	46/00	High Beam Headlamp	LED	N/A LED	N/A ECE	HR PL 01 50 E1 3967	HKG 460 818-26 & Refer ADR	E1 3967
		49/00	Front Position Lamp	LED	N/A LED	N/A ECE	PL 02 A E1 3161	13/00	
1394	011815-00	46/00	High Beam Headlamp	LED	N/A LED	N/A ECE	HR PL 01 45 E1 3738	HKG 460 818-29 & Refer ADR 13/00	E1 3738
1395	958 040-02	46/00	High Beam Headlamp	LED	N/A LED	N/A ECE	E24 112R- 010008	460 881-50	E24 20 0008
1395HD	958 040-03							460 881-51	
1396 1396HD	958 040-06	46/00	High Beam Headlamp	LED	N/A LED	N/A ECE	E24 112R- 010009	460 881-50	E24 30 0009
1396HD 1397HD	958 040-04 958 130-12	46/00	High Beam Headlamp	LED	N/A LED	N/A ECE	E24 10R- 01 0012	460 881-51 460 881-51	E24 25 0012
1398HD	958 130-02	46/00	High Beam Headlamp	LED	N/A LED	N/A ECE	E24 10R-01 0013	/AN 881-51	E24 37.5 0013
1405	003014-09	1/00	Reversing Lamp	R1221	P21W	RL*1405*A	15131	911-351-53	8703R23
1407	901227-70	1/00	Reversing Lamp	K1221	C21W	RL*1407*A	15201	911-351-55	905972
1413	002694-00	1/00	Reversing Lamp	R1221	P21W	RL*1413*A	15129	911-351-57	8708R23
1430-H	959070-50		- '			RL*1430-H*A	36417		
1430-V	959070-55	1/00	Reversing Lamp	LED	N/A LED	RL*1430-V*A	36418	959-150-10	9060

HELLA Part No.	Engineering Drawing No.	ADR No.	Function	Bulb(s)	Bulb Type	HELLA Ref. or ECE	FORS Ref: CRN or ECE	Instruction Sheet No.	Lamp Identification
1433	959820-00	1/00	Reversing Lamp	LED	N/A LED	RL*1433*A	33190	959-149-69	9020
1446-H	959041-30	1/00	Reversing Lamp	LED	N/A LED	RL*1446-H*A	35980	959-149-95	9040
1446-V	959041-40	1/00	Reversing Lamp	LED	N/A LED	RL*1446-V*A	36243		
1447L	959041-37	1/00	Reversing Lamp	LED	N/A LED	1447*RV*C	45662	958-780-84	9040
1447R	959041-36	1/00	Reversing Lamp	LED	N/A LED	1447*RV*C	45662		
1459	959930-12	1/00	Reversing Lamp	LED	N/A LED	RL*1465*A	35981	959-150-19	9930
		1/00	Reversing Lamp	LED	N/A LED	RL*1461*A	45442		
1461	980762-01	47/00	Retro Reflector (Red/Rear)	N/A	N/A	RE*2161*A	45633	958-780-72	0760
1465	959930-00	1/00	Reversing Lamp	LED	N/A LED	RL*1465*A	35981	959-150-04	
1467	959930-11	1/00	Reversing Lamp	LED	N/A LED	RL*1465*A	35981	959-150-18	9930
1468	980889-00		J 1						
1468-24V	980889-20	1/00	Reversing Lamp	LED	N/A LED	N/A ECE	E24 23R-00027	958-315-25	0880D
1468V	980889-10								
1468V-24V	980889-30	1/00	Reversing Lamp	LED	N/A LED	N/A ECE	E24 23R-00028	958-315-26	0880E
1490	959010-50	1/00	Reversing Lamp	LED	N/A LED	RL*1490*A	36253	959-150-16	9010
1547-RE	996376-09	1/00	Reversing Spotlamp	LED	N/A LED	N/A ECE	00 E1 3902	HFA 460 845- 18/04.14 & Refer ADR 13/00	
1551-RE	996188-12	1/00	Reversing Spotlamp	LED	N/A LED	N/A ECE	00 E1 3249	HFA 460 845- 15.02/12 & Refer ADR 13/00	003249
1563C-RE	996284-50	1/00	Reversing Spotlamp	LED	N/A LED	N/A ECE	00 E1 4576		004576
2000	901227-24	49/00	Front Position Lamp or Front End Outline Lamp	L125	C5W	FP*2000*A	15243	911-351-58	910001
2026	959660-30	45/01 6/00:Cat 5	Cab Marker Lamp Supp. Side Direction Indicator Lamp	· LED	N/A LED	CM*2026*A SDI*2026*A	25025 25725	959-149-17	9560
2027	980660-10	45/01	Cab Marker Lamp	LED	N/A LED	CM*2027*A	42856	980-703-13	6600
2027P	980660-12	6/00:Cat 5	Supp. Side Direction Indicator Lamp	LLD	N/A LLD	SDI*2027*A	42857	760-703-13	0000
2029	900139-01	45/01	Side Marker Lamp	L125	C5W	SM*2029*A	15143	911-351-69	910049
2030	900139-02	6/00:Cat 5	Supp. Side Direction Indicator Lamp	L125	C5W	FL*2030*A	15146	911-351-70	910049
2031	959700-00	6/00:Cat 5	Supp. Side Direction Indicator Lamp	LED	N/A LED	SDI*2031*A	30768	959-149-55	9700
2033	959700-20	45/01	Side Marker Lamp	LED	N/A LED	SM*2033*A	31432	959-149-58	9700
2041	958583-02	1/00	Reversing Lamp	R1221	P21W	RL*2041*A	15325	911-352-82	HNZ01
2042	905055-01	45/01	Side Marker Lamp	M123	N/A Type M123	SM*2042*A	15192	911-351-74	910089
2046	958607-02	1/00	Reversing Lamp Front Position Lamp or Front End	R1221 G125	P21W R5W	RL*2046*A FP*2046*A	15329 15352	911-352-89	HNZ01
		47700	Outline Lamp	0123		71 2040 A	15552		
2051	959570-10	49/00	Front End Outline Lamp	LED	N/A LED	FE0*2051X*A	40676	959-150-79	9560
2053 & 2053-GMD 2053PC	959660-50	45/01	Side Marker Lamp	LED	N/A LED	SM*2053*A	24743	959-149-16	9560
205/	050570 50	10/00	Front Position Lamp	LED	N/A LED	FP*2054*A	25912	050 150 00	02 7575
2054	959570-50	49/00	Front End Outline Lamp	- LED	N/A LED	N/A ECE	A 02 E24 0051	959-150-80	A 02 E24 0051
2055	959590-40	49/00	Front Position Lamp Front End Outline Lamp	LED	N/A LED	N/A ECE	E4 02 7597 A 02 E24 0054	959-149-26	E4 02 7597 A 02 E24 0054
2056	959590-30	49/00	Front End Outline Lamp	LED	N/A LED	FE0*2056*A	27380	959-149-38	9590
2057	959650-00	45/01	Cab Marker Lamp	LED	N/A LED	CM*2057*A	27432	959-149-42	9650
2058	980660-00	15.15	61.14	. 50	N1/A 1 ==	G1 #0	44505	000 5	
2058P	980660-02	- 45/01	Side Marker Lamp	LED	N/A LED	SM*2058*A	41597	980-703-13	6600
2059	980855-01	10.100	Front Position Lamp or Front End	. 50	N/A 1 55	ED+0056 : :	(5000	050 500 :-	
2059S	980855-02	49/00	Outline Lamp	LED	N/A LED	FP*2059*A	45233	958-780-67	0855
2060	980855-20	10.100	E 15 10 %	LED	NI/A 1 53	FF0+00 / 0+ :	/F/20	050 500 50	0055
2060S	980855-21	- 49/00	Front End Outline Lamp	LED	N/A LED	FE0*2060*A	45630	958-780-70	0855
2061	980660-20		Front Position Lamp or Front End						
2061P	980660-22	- 49/00	Outline Lamp	LED	N/A LED	2061*RP*C	46857	958-780-95	6600
2062	980660-30								
2062P	980660-32	49/00	Front End Outline Lamp	LED	N/A LED	2062*FEOM*C	46858	958-780-96	6600
2063	900741-25	49/00	Front Position Lamp or Front End Outline Lamp	L125	C5W	FP*2063*A	15282	911-351-76	10833

HELLA Part No.	Engineering Drawing No.	ADR No.	Function	Bulb(s)	Bulb Type	HELLA Ref. or ECE	FORS Ref: CRN or ECE	Instruction Sheet No.	Lamp Identification
2064	003014-07	49/00	Front Position Lamp or Front End Outline Lamp	L125	C5W	FP*2064*A	15177	911-351-77	11793R7
2066	006679-00	49/00	Front Position Lamp or Front End Outline Lamp	G1210	R10W	FP*2066*A	15253	911-351-79	0121691
		45/01	Cab Marker Lamp	G125	R5W	CM*2067*A	15361		
2067	006679-01	49/00	Front End Outline Lamp	G125	R5W	FE0*2067*A	15360	911-353-23	TV25
2071	980990-40	49/00	Front End Outline Lamp	LED	N/A LED	2071*FE0M*C	45943	958-780-90	0990
2073	980990-00	45/01	Side Marker Lamp	LED	N/A LED	2073*SML*C	45809	958-780-87	0990
2074	980990-20	49/00	Front Position Lamp or Front End Outline Lamp	LED	N/A LED	2074*FE0M*C	45944	958-780-89	0990
2076	980990-10	45/01 6/00:Cat 5	Cab Marker Lamp Supp. Side Direction Indicator Lamp	·· LED	N/A LED	2076*ECM*C 2076*SDI*C	45810 45811	958-780-88	0990
	001005.07	6/00:Cat 5	Supp. Side Direction Indicator Lamp	L125	C5W	DI*2077*A	15204	044 054 00	040004
2077	901227-06	49/00	Front End Outline Lamp	L125	C5W	FE0*2077*A	25617	911-351-80	910001
2078	901227-23	49/00	Rear Position Lamp or Rear End Outline Lamp	L125	C5W	RR*2078*A	15250	911-351-81	910001
2083	980868-04	- 45/01	Side Marker Lamp	LED	N/A LED	2083*SM*C	47116	958-315-32	0868
2083S	980868-06	43/01	Side Marker Lamp	LLD	N/A LLD	2003 314 6	47110	730-313-32	
2100	901227-04	6/00:Cat 1	Front Direction Indicator Lamp	K1221	C21W	FL*2100*A	15212	911-351-88	910001
2101	002939-17	6/00:Cat 1	Front Direction Indicator Lamp	R1221	P21W	DI*2101*A	29439	911-353-58	32710
2105	959932-20	6/00:Cat 1	Front Direction Indicator Lamp	LED	N/A LED	DI*2105M*A	36805		9930
2106-CS	959932-13	6/00:Cat 1	Front Direction Indicator Lamp	LED	N/A LED	N/A ECE	1 01 E24 5851	959-150-92	1 01 E24 5851
2107	959011-10	49/00 6/00:Cat 1	Front Position Lamp Front Direction Indicator Lamp	LED LED	N/A LED	N/A ECE DI*2107*A	A 02 E24 5851 41601		A 02 E24 5851
2107 2107CLR	959011-11	6/00:Cat 1	Front Direction Indicator Lamp	LED	N/A LED	DI*2107 A	41609	980-703-19	9010
2108-GMD	980691-11	6/00:Cat 1	Front Direction Indicator Lamp	LED	N/A LED	N/A ECE	41007	980-703-70	
		49/00	Front Position Lamp	LED	N/A LED	N/A ECE	E24 5854		- 0690
2108-GMD24V	980690-00	76/00	Daytime Running Lamp	LED	N/A LED	N/A ECE		980-703-29	
2109	980888-30	6/00:Cat 1	Front Direction Indicator Lamp	LED	N/A LED	2109*FDI*C	46349		
2109-24V	980888-40	6/00:Cat 1	Front Direction Indicator Lamp	LED	N/A LED	210924H*DI*C	46348	958-315-01	0880
2109V	980888-50	6/00:Cat 1	Front Direction Indicator Lamp	LED	N/A LED	2109V*FDI*C	46347	050 215 20	00000
2109V-24V	980888-60	6/00:Cat 1	Front Direction Indicator Lamp	LED	N/A LED	210924V*DI*C	46346	958-315-20	0880B
2126	905626-04	6/00:Cat 1 & 6/00:Cat 5	Front Direction Indicator Lamp and Supp. Side Direction Indicator Lamp	R1221	P21W	FL*2126*A	15271	911-351-98	905628
		6/00:Cat 5	Supp. Side Direction Indicator Lamp	G125	R5W	FL*2126*B	15300		
2127	900763-29	6/00:Cat 1 & 6/00:Cat 5	Front Direction Indicator Lamp and Supp. Side Direction Indicator Lamp	R1221	P21W	FL*2127*A	15272	911-351-99	R.D.10833
		6/00:Cat 5	Supp. Side Direction Indicator Lamp	G125	R5W	FL*2127*B	15301		
2128	900763-30	6/00:Cat 1	Front Direction Indicator Lamp	R1221	P21W	FL*2128*A	15273	911-352-00	R.D.10833
		6/00:Cat 5	Supp. Side Direction Indicator Lamp	G125	R5W	SDI*2128*A	15306		
2128LED	959932-30	6/00:Cat 1	Front Direction Indicator Lamp	LED	N/A LED	DI*2105M*A	36805	959-150-25	9930
2129	900763-31	6/00:Cat 1 & 6/00:Cat 5	Front Direction Indicator Lamp and Supp. Side Direction Indicator Lamp	FD1221	P21W (DC)	DI*2129*A	15304	911-352-76	R.D.10833
	050011.00	6/00:Cat 5	Supp. Side Direction Indicator Lamp	GD125	R5W (DC)	DI*2129*B	15305	050 140 50	
2130	959011-00	6/00:Cat 2a	Rear Direction Indicator Lamp	LED	N/A LED	DI*2130*A	30649	959-149-50	9010
2131-CS	959932-15	6/00:Cat 1 49/00	Front Direction Indicator Lamp Front Position Lamp	LED LED	N/A LED	N/A ECE N/A ECE	1 01 E24 5851 A 02 E24 5851	980-703-03	1 01 E24 5851 A 02 E24 5851
2133	959822-00	47/00	TTOTIL FUSICION LATTIP	LLU	IN/ M LEU	IN/ A EUE	M UZ EZ4 3831		M UZ EZ4 3831
2133CS	959822-60	6/00:Cat 2a	Rear Direction Indicator Lamp	LED	N/A LED	DI*2133*A	33191	959-149-71	9020
2133-24V	959021-00	6/00:Cat 2a	Rear Direction Indicator Lamp	LED	N/A LED	DI*2133-24V*A	30442	959-149-53	9020
		6/00:Cat 1	Front Direction Indicator Lamp	K1221	C21W	FL*2135*A	15270		
2135	900739-10	49/00	Front End Outline Lamp	L125	C5W	FE0*2135*A	25578	911-352-02	10833
2135LED	959932-31	6/00:Cat 1	Front Direction Indicator Lamp	LED	N/A LED	DI*2105M*A	36805	959-150-26	9930
2136	900741-21	6/00:Cat 1	Front Direction Indicator Lamp	K1221	C21W	FL*2136*A	15211	911-352-03	10833
	/00/41-21	49/00	Front End Outline Lamp	L125	C5W	FE0*2136*A	25579	/11-332=03	10033
2138	959031-00	6/00:Cat2a	Rear Direction Indicator Lamp	LED	N/A LED	12V Horiz 24V Horiz 12V Vert	44203 44204 44205	958-780-25	9030
						24V Vert	44209		
		47/00	Retro Reflector (Red/Rear)	N/A	N/A	RE*2317*A-1	22948		

HELLA Part No.	Engineering Drawing No.	ADR No.	Function	Bulb(s)	Bulb Type	HELLA Ref. or ECE	FORS Ref: CRN or ECE	Instruction Sheet No.	Lamp Identification
		6/00:Cat 1 & 6/00:Cat 5	Front Direction Indicator Lamp and Supp. Side Direction Indicator Lamp	R1221	P21W	FL*2142*C	15318		
2142	905141-02	6/00:Cat 5	Supp. Side Direction Indicator Lamp	G125	R5W	FL*2142*B	15203	911-352-06	53174
		6/00:Cat6	Supp. Side Direction Indicator Lamp	R1221	P21W	FL*2142*D	30062		
2144	958583-00	6/00:Cat 2a	Rear Direction Indicator Lamp	R1221	P21W	DI*2144*A	15319	911-352-86	HNZ01
	700000 00	49/00	Front End Outline Lamp	G125	R5W	FE0*2144*A	25576	711 002 00	
2145	958607-00	6/00:Cat 2a	Rear Direction Indicator Lamp	R1221	P21W	DI*2145*A	15330	911-352-90	HNZ01
		49/00	Front End Outline Lamp	G125	R5W	FE0*2145*A	25577		
2146-H	959041-10	_				DI*2146-H*A	26179	959-149-30	
2146-HCS	959041-51	-				DI*2146-H24*A	34498	959-150-57	
2146-H24	959041-50	- 6/00:Cat2a	Rear Direction Indicator Lamp	LED	N/A LED	DI*21// \/*A	2/100	959-149-88	9040
2146-V 2146-VCS	959041-20	_				DI*2146-V*A	26180 40650	959-149-30 959-150-57	
2146-VC5 2146-V24	959041-71 959041-70	-				DI*2146-VCS*A	36718	959-149-88	
2140-724	737041=70	6/00:Cat 2a	Rear Direction Indicator Lamp	R1221	P21W	FL*2147*A	15168	737-147-00	
2147	003014-01	49/00	Front End Outline Lamp	G125	R5W	FE0*2147*A	25759	911-352-11	32619R6
		6/00:Cat 1	Front Direction Indicator Lamp	R1221	P21W	FL*2148*A	15170		
2148	003014-11	49/00	Front End Outline Lamp	G125	R5W	FE0*2148*A	25761	911-352-12	32661R6
		6/00:Cat 1 &	Front Direction Indicator Lamp and	R1221	P21W	FL*2150*A	15172		
2150	005603-00	6/00:Cat 5	Supp. Side Direction Indicator Lamp					911-352-14	6R0142748
		49/00	Front End Outline Lamp	G125	R5W	FE0*2150*A	25763		
2151	959070-00					12V Horiz	44206	958-780-24	
		-				24V Horiz	44192		
2152	959070-20					12V Vert	44193	959-149-03	9060
						24V Vert	44194		
2151-H	959070-35	- 6/00:Cat 2a	Rear Direction Indicator Lamp	LED	N/A LED	FL*2151-H*A	36420		
2151-HCS	980607-00	-						959-150-11	2a 01 E24 5850
2151-V	959070-25	-				FL*2151-V*A	36421		9060
2151-VCS	980607-50	-				DI*2151-VCS*A	2a 01 E24 5850	959-150-56	2a 01 E24 5850
2153	006692-01	6/00:Cat 6	Supp. Side Direction Indicator Lamp	R1221	P21W	SDI*2153*B	30495	911-353-69	50/04
2154	006692-02	6/00:Cat 6	Supp. Side Direction Indicator Lamp	R1221	P21W	SDI*2154*B	30497	911-353-70	52621
2155-24V	008355-00	//00.0 . /	C C'I D' E I I I I	R2421	P21W	SDI*2155*A	30498	011 050 51	1059
2155	008355-01	- 6/00:Cat 6	Supp. Side Direction Indicator Lamp	RY1221	PY21W	SDI*2155CLR*A	E1 011848	911-353-71	1848
2156	959075-50	//00.Cat 2a	Poor Direction Indicator Lamp	LED	N/A LED	DI*2156*A	26483	959-149-28	007/
2156-24V	959075-00	- 6/00:Cat 2a	Rear Direction Indicator Lamp	LED	N/A LED	DI*2156-24V*A	26104	959-149-29	9074
2159	959932-72	6/00:Cat 2a	Rear Direction Indicator Lamp	LED	N/A LED	DI*2165*B	36056	959-150-23	9930
2161	980761-01	6/00:Cat 2a	Rear Direction Indicator Lamp	LED	N/A LED	DI*2161*A	45443	958-780-73	0760
2165	959932-50	6/00:Cat 2a	Rear Direction Indicator Lamp	LED	N/A LED	DI*2165-*B	36056	959-150-06	9930
2167	959932-71	6/00:Cat 2a	Rear Direction Indicator Lamp	LED	N/A LED	DI*2165-*B	36056	959-150-22	9930
2167-CS	959932-53	0,00.04124	rear birection indicator Earlip		- IVALLU	N/A ECE	2a 01 E24 0023	980-703-05	2a 01 E24 0023
2168	980888-00		Dana Dissation Indicator I ama	LED	N/A LED	DI*2168*A	46435	958-315-02	0880C
		- 6/00:Cat 2a	Rear Direction indicator Lamp						
2168-24V	980888-20	- 6/00:Cat 2a	Rear Direction Indicator Lamp	LLD	IN/A LLD	DI*2168-24V*A	46434		
2168-24V 2BM 011 788-041				LED			46434 E11 6R-017506		E11 7506
	011788-04	- 6/00:Cat 2a - 6/00:Cat 6	Supp. Side Direction Indicator Lamp		N/A LED	DI*2168-24V*A N/A ECE			E11 7506
2BM 011 788-041	011788-04							911-352-15	E11 7506 910001
2BM 011 788-041 2BM 011 788-051	011788-04 011788-05	- 6/00:Cat 6	Supp. Side Direction Indicator Lamp	LED	N/A LED	N/A ECE	E11 6R-017506	911-352-15 Refer ADR 13/00	910001
2BM 011 788-041 2BM 011 788-051 2303	011788-04 011788-05 901227-19	- 6/00:Cat 6 49/00	Supp. Side Direction Indicator Lamp Stop Lamp Rear Position Lamp or	LED K1221	N/A LED C21W	N/A ECE RR*2303*A	E11 6R-017506		910001
2BM 011 788-041 2BM 011 788-051 2303	011788-04 011788-05 901227-19	- 6/00:Cat 6 49/00 49/00	Supp. Side Direction Indicator Lamp Stop Lamp Rear Position Lamp or Rear End Outline Lamp	LED K1221 LED	N/A LED C21W N/A LED	N/A ECE RR*2303*A RP*2305*A	E11 6R-017506 15249 24962		910001
2BM 011 788-041 2BM 011 788-051 2303 2305	011788-04 011788-05 901227-19 963639-30	- 6/00:Cat 6 49/00 49/00 47/00	Supp. Side Direction Indicator Lamp Stop Lamp Rear Position Lamp or Rear End Outline Lamp Retro Reflector (Red/Rear) Rear Position Lamp or	LED K1221 LED N/A	N/A LED C21W N/A LED N/A	N/A ECE RR*2303*A RP*2305*A RE*2305*B	E11 6R-017506 15249 24962 25036	Refer ADR 13/00	910001
2BM 011 788-041 2BM 011 788-051 2303 2305	011788-04 011788-05 901227-19 963639-30	- 6/00:Cat 6 49/00 49/00 47/00 49/00	Supp. Side Direction Indicator Lamp Stop Lamp Rear Position Lamp or Rear End Outline Lamp Retro Reflector (Red/Rear) Rear Positon Lamp or Rear End Outline Lamp	LED K1221 LED N/A LED	N/A LED C21W N/A LED N/A N/A LED	N/A ECE RR*2303*A RP*2305*A RE*2305*B RP*2305*A	E11 6R-017506 15249 24962 25036 24962	Refer ADR 13/00	910001
2BM 011 788-041 2BM 011 788-051 2303 2305	011788-04 011788-05 901227-19 963639-30 963639-31	- 6/00:Cat 6 49/00 49/00 47/00 47/00	Supp. Side Direction Indicator Lamp Stop Lamp Rear Position Lamp or Rear End Outline Lamp Retro Reflector (Red/Rear) Rear Positon Lamp or Rear End Outline Lamp Retro Reflector (Red/Rear) Rear Positon Lamp or	LED K1221 LED N/A LED N/A	N/A LED C21W N/A LED N/A N/A LED N/A	N/A ECE RR*2303*A RP*2305*A RE*2305*B RP*2305*A RE*2305*B	E11 6R-017506 15249 24962 25036 24962 25036	Refer ADR 13/00 Refer ADR 13/00	910001 9808 9808
2BM 011 788-041 2BM 011 788-051 2303 2305 2306	011788-04 011788-05 901227-19 963639-30 963639-31 959560-10	- 6/00:Cat 6 49/00 49/00 47/00 49/00 47/00 49/00	Supp. Side Direction Indicator Lamp Stop Lamp Rear Position Lamp or Rear End Outline Lamp Retro Reflector (Red/Rear) Rear Positon Lamp or Rear End Outline Lamp Retro Reflector (Red/Rear) Rear Positon Lamp or Rear End Outline Lamp Rear Positon Lamp or Rear End Outline Lamp Rear Position Lamp or	LED K1221 LED N/A LED N/A LED	N/A LED C21W N/A LED N/A N/A LED N/A N/A LED	N/A ECE RR*2303*A RP*2305*A RE*2305*B RP*2305*A RE*2305*B RP*2307X*A	E11 6R-017506 15249 24962 25036 24962 25036 40680	Refer ADR 13/00 Refer ADR 13/00 959-150-81	910001 9808 9808 9560

HELLA Part No.	Engineering Drawing No.	ADR No.	Function	Bulb(s)	Bulb Type	HELLA Ref. or ECE	FORS Ref: CRN or ECE	Instruction Sheet No.	Lamp Identification
2311	980660-40	- 49/00	Rear Position Lamp or	LED	N/A LED	2311*RP*C	46859	958-780-97	6600
2311P	980660-42	47,00	Rear End Outline Lamp				40007	700 700 77	
2312	980990-60	49/00	Rear Positon Lamp or Rear End Outline Lamp	LED	N/A LED	2312*RE0M*C	45945	958-780-91	0990
2314	900739-11	49/00	Rear Position / Stop Lamp	L125/K1221	C5W/C21W	RR*2314*A	15316	911-352-83	10833
2315	900741-22	49/00	Rear Position / Stop Lamp	L125/K1221	C5W/C21W	RR*2315*A	15310	911-352-84	10833
		47/00	Retro Reflector (Red/Rear)	N/A	N/A	RE*2317*A-1	22948		
			Rear Position : Horiz			RP*2317H*A	42577		
2317	959030-00	49/00	Stop : Horiz	LED	N/A LED	ST*2317H*A	42579	959-149-05	9030
		47700	Rear Position : Vert		IV/A LLD	RP*2317V*A	42578		
			Stop : Vert			ST*2317V*A	42582		
2318	980887-00	49/00	Stop Lamp	LED	N/A LED	SL*2318*A	46360		
		47,00	Rear Position Lamp			RP*2318*A	46351	958-780-99	0880C
2318-24V	980887-20	49/00	Stop Lamp	LED	N/A LED	SL*2318-24V*A	46361	,30-700-77	00000
2510-247	700007-20	47700	Rear Position Lamp	LLD	IV/A LLD	RP*2318-24V*A	46353		
2320	958582-00	47/00	Retro Reflector (Red/Rear)	N/A	N/A	RE*2320*A	15322	911-352-80	HNZ01
2320	730302=00	49/00	Rear Position / Stop Lamp	S1221/5V	P21W/5W	RR*2320*A	15321	711-332-00	1111/201
2321	958606-00	47/00	Retro Reflector (Red/Rear)	N/A	N/A	RE*2321*A	15327	911-352-91	HNZ01
2321	738600-00	49/00	Rear Position / Stop Lamp	S1221/5V	P21W/5W	RR*2321*A	15328	711-332-71	TIINZUT
2324	006679-02	49/00	Rear Position Lamp or Rear End Outline Lamp	G1210	R10W	RR*2324*A	15251	911-352-20	0131470
2325	003014-05	49/00	Rear Position Lamp or Rear End Outline Lamp	L125	C5W	RR*2325*A	15252	911-352-21	0131418
2330	959060-00	49/00	Rear Position Horiz	LED	N/A LED	RP*2330H1*A	42558	959-149-00	
			Stop : Horiz			ST*2330H1*A	42560		9060
2331	959060-20	49/00	Rear Position : Vert	LED	N/A LED	RP*2330V1*A	42559	959-149-02	7000
			Stop : Vert			ST*23301*A	42561		
2220 11	050.0/0.35	/0/00	Stop Lamp	LED	N/A LED	SL*2330-H*A	36428	959-150-12	
2330-Н	959-060-35	49/00	Rear Position Lamp	··· LED	N/A LED	RP*2330-H*A	36426		9060
2330-V	959-060-25	49/00	Stop Lamp	LED	N/A LED	SL*2330-V*A	36429		7000
2330-V	737-000-23	47/00	Rear Position Lamp	LLD	N/A LLD	RP*2330-V*A	36427		
2332-H24	959040-5x	49/00	Stop Lamp	LED	N/A LED	SL*2332-H24*A	34509		
2552-1124	737040-3X	47700	Rear Position Lamp	LLD	IV/A LLD	RP*2332-H24*A	34502	959-149-87	9040
2332-V24	959040-70	49/00	Stop Lamp	LED	N/A LED	SL*2332-V24*A	36722	737-147-07	7040
2332-424	737040-70	47/00	Rear Position Lamp	LLD	N/A LLD	RP*2332-V24*A	36721		
2334-12V	959074-50		Stop Lamp	LED	N/A LED	SL*2334*A	26486		
2334-124	737074-30	- 49/00	Rear Position Lamp	LLD	N/A LLD	RP*2334*A	26484	959-149-27	9074
2334-24V	959074-00	47/00	Stop Lamp	LED	N/A LED	SL*2334-24V*A	26152	737-147-27	7074
2334-244	737074-00		Rear Position Lamp	LLD	N/A LLD	RP*2334-24V*A	26151		
2359	959931-12	49/00	Stop Lamp	LED	N/A LED	ST*2365*B	36250	959-150-21	9930
2337	737731-12	47/00	Rear Position Lamp	LLD	N/A LLD	RP*2365*B	36078	737-130-21	7730
		49/00	Stop Lamp	LED	N/A LED	ST*2361*A	45634		
2361	980760-01	47/00	Rear Position Lamp	LLD	N/A LLD	RP*2361*A	45632	958-780-75	0760
		47/00	Retro Reflector (Red/Rear)	N/A	N/A	RE*2161*A	45633		
2365	959931-00	49/00	Stop Lamp	LED	N/A LED	ST*2365*B	36250	050 150 05	9930
2305	737731-00	47/00	Rear Position Lamp	LED	IN/ A LED	RP*2365*B	36078	959-150-05	7730
2366	959821-00	49/00	Stop Lamp	LED	N/A LED	SL*2366*A	33196	959-149-70	9020
2300	737021-00	47/00	Rear Position Lamp	LED	IN/ A LED	RP*2366*A	33198	737-147-70	7020
2244 2414	050000 00	/,0/nn	Stop Lamp	LED	N/A LED	SL*2366-24V*A	30445	050 1/0 52	9020
2366-24V	959020-00	49/00	Rear Position Lamp	LEU	N/A LED	RP*2366-24V*A	30443	959-149-52	7UZU
22/7	050001 11	(0/00	Stop Lamp	LED	N/A LED	ST*2365*B	36250	050 150 00	0022
2367	959931-11	49/00	Rear Position Lamp	LED	N/A LED	RP*2365*B	36078	959-150-20	9930
		6/00:Cat 2a	Rear Direction Indicator Lamp	K1221	C21W	FL*2368*A	15278		
22.42	000007	47/00	Retro Reflector (Red/Rear)	N/A	N/A	RE*2368*B	15279	011 050 5:	/0070
2368	900807-01	48/00	Licence Plate Lamp	L1210	N/A	LP*2368*B	15289	911-352-26	69079
		49/00	Rear Position / Stop Lamp	L1210/K1221	N/A/C21W	RR*2368*B	16361		

HELLA Part No.	Engineering Drawing No.	ADR No.	Function	Bulb(s)	Bulb Type	HELLA Ref. or ECE	FORS Ref: CRN or ECE	Instruction Sheet No.	Lamp Identification
		6/00:Cat 2a	Rear Direction Indicator Lamp			2377*RDI*C	45253		
	000710 01	10.100	Stop Lamp	LED	N/A LED	2377*ST*C	45256	050 500 44	0740
2377	980710-01	49/00	Rear Position Lamp			2377*RP*C	45254	958-780-66	0710
		47/00	Retro Reflector (Red/Rear)	N/A	N/A	2377*RR*C	45255		
2378	980613-00	6/00:Cat 2a	Rear Direction Indicator Lamp	LED	N/A LED	2378*RDI*C	45258	958-780-63	
2378-CS	980613-20	49/00	Stop Lamp	LED	N/A LED	2378*ST*C	45260	958-780-64	
2378-DT	980602-00		· ·			2378*RP*C	45259	958-780-65	0710
2378-DTCS	980602-20	49/00	Rear Position Lamp	LED	N/A LED	2378*DT*RP*C	45257	958-780-68	_
2379	700002 20	6/00:Cat 2a	Rear Direction Indicator Lamp			DI*2379*A	30916	700 700 00	
2379-GMD	959050-00	49/00	Stop Lamp	LED	N/A LED	SL*2379*A	30919	959-149-47	
23/7-GMD	050050 /0	47/00	Stop Lamp			3L 23/7 A	30717		— 9050
2379-CS	959050-40 959050-41	49/00	Rear Position Lamp	LED	N/A LED	RP*2379*A	30917	959-150-55	
2380	980603-50	6/00:Cat 2a	Rear Direction Indicator Lamp	LED	N/A LED	DI*2380*A	43630		
2380-GMD	980603-55	49/00	Stop Lamp	LED	N/A LED	SL*2380*A	43632	958-780-05	
2380-DT	980615-01	49/00	Rear Position Lamp	LED	N/A LED	RP*2380*A	43631		— 9050
2380-DTGMD	980615-05	1/00	Reversing Lamp	LED	N/A LED	RL*2380*A	43628	958-780-35	
2383-24VCS	980613-51	6/00:Cat 2a	Rear Direction Indicator Lamp	LED	N/A LED	N/A ECE	E24 6R-015894	958-315-28	
		49/00	Stop Lamp				E24 7R-025894		
2383-DT24VCS	980602-51	49/00	Rear Position Lamp	LED	N/A LED	N/A ECE	E24 7R-025894	958-315-27	0710
2303-0124463	700002-31	•		TED	N/A LED	N/A ECE		730-313-27	
		1/00	Reversing Lamp				E24 23R-005894		
2384	003014-14	48/00	Licence Plate Lamp	L125	C5W	LP*2384*A	15175	911-352-30	231453
		49/00	Rear Position / Stop Lamp	L125/R1221	C5W/P21W	RR*2384*A	15167		
2390	959010-00	49/00	Stop Lamp	*	•	SL*2390*A	30651	959-149-51	9010
			Rear Position Lamp	LED	N/A LED	RP*2390*A	30650		
		1/00	Reversing Lamp			2391*RV*C	45251		
		6/00:Cat 2a	Rear Direction Indicator Lamp	LED	N/A LED	2391*RDI*C	45248		
2391	980980-00	/0/00	Stop Lamp	LLD	N/A LLD	2391*ST*C	45262	958-780-58	0980
		49/00	Rear Position Lamp			2391*RP*C	45261		
		47/00	Retro Reflector (Red/Rear)	N/A	N/A	2391*RR*C	45250		
2392L	980980-01	1/00	Reversing Lamp	LED	N/A LED	2392*RV*C	45267		
		6/00:Cat 2a	Rear Direction Indicator Lamp			2392*RDI*C	45264		
			Stop Lamp	LED	N/A LED	2392*ST*C	45268		
2392R	980980-02	49/00	Rear Position Lamp			2392*RP*C	45265	958-780-59	0980
237211	700700-02	47/00	Retro Reflector (Red/Rear)	N/A	N/A	2392*RR*C	45266		
					•				
		48/00	Licence Plate Lamp	LED	N/A LED	2392*LP*C	45263		
		6/00:Cat 2a	Rear Direction Indicator Lamp			DI*2394*B	42034		
2394	980720-00	49/00	Stop Lamp	LED	N/A LED	SL*2394*A	42037	980-703-20	0720
			Rear Position Lamp	*		RP*2394*A	42036		
		47/00	Retro Reflector (Red/Rear)	N/A	N/A	2395*RR*C	46508		
		6/00:Cat 2a	Rear Direction Indicator Lamp			DI*2395*B	42030		
		49/00	Stop Lamp	LED	N/A LED	SL*2395*C	42179		
2395	980720-40	49/00	Rear Position Lamp			RP*2395*C	42178	980-703-21	0720
		47/00	Retro Reflector (Red/Rear)	N/A	N/A	2395*RR*C	46508		
		48/00	Licence Plate Lamp	LED	N/A LED	LP*2395*C	42175		
		6/00:Cat 2a	Rear Direction Indicator Lamp	K1221	C21W	FL*2396*A	15239		
2396	905002-01	48/00	Licence Plate Lamp	L125	C5W	LP*2396*A	15280	911-352-31	54519
		49/00	Rear Position / Stop Lamp	L125/K1221	C5W/C21W	RR*2396*A	15238		
							15258		
207	005140 00	6/00:Cat 2a	Rear Direction Indicator Lamp	K1221	C21W	FL*2397*A		011 252 22	052011
2397	905168-00	47/00	Retro Reflector (Red/Rear)	N/A	N/A	RE*2397*A	15261	911-352-32	953811
		49/00	Rear Position / Stop Lamp	L125/K1221	C5W/C21W	RR*2397*A	15265		
						DI*2399*A	37114		
		6/00:Cat 2a	Rear Direction Indicator Lamp						
2399	959010-20		Rear Direction Indicator Lamp Stop Lamp	LED	N/A LED	SL*2399*A	37116	959-150-30	9010
2399	959010-20	6/00:Cat 2a 49/00		LED	N/A LED		37116 37115	959-150-30	9010
2399	959010-20		Stop Lamp	LED R1221	N/A LED	SL*2399*A		959-150-30	9010
		49/00	Stop Lamp Rear Position Lamp			SL*2399*A RP*2399*A	37115		
2399	959010-20 910036-01	49/00 6/00:Cat 2a	Stop Lamp Rear Position Lamp Rear Direction Indicator Lamp	R1221	P21W	SL*2399*A RP*2399*A FL*2400*A	37115 15260	959-150-30	9010

2422 958562-00 47/00 Retro Reflector (Red/Rear) N/A N/A RE*2422*A 153 49/00 Rear Position / Stop Lamp \$1221/5V P21W/5W RR*2422*A 153 2423 958616-00 47/00 Retro Reflector (Red/Rear) N/A N/A N/A RE*2423*A 153 49/00 Rear Position / Stop Lamp \$1221/5V P21W/5W RR*2423*A 153 49/00 Rear Direction Indicator Lamp R1221 P21W DI*2424*A 153 47/00 Retro Reflector (Red/Rear) N/A N/A RE*2424*A 153 49/00 Rear Position / Stop Lamp \$1221/5V P21W/5W RR*2424*A 153 49/00 Rear Position / Stop Lamp \$1221/5V P21W/5W RR*2424*A 153 1/00 Reversing Lamp R1221 P21W RL*2424*A 153 4/00:Cat2a Rear Direction Indicator Lamp R1221 P21W RL*2424*A 153 4/00:Cat2a Rear Direction Indicator Lamp R1221 P21W R1246-H24*A 344 4/00:Cat2a Rear Direction Indicator	320 324 323 338 339 340 342 343 344 341	911-352-81 911-352-92	HNZ01 HNZ01
49/00 Rear Position / Stop Lamp S1221/5V P21W/5W RR*2422*A 153 6/00:Cat 2a Rear Direction Indicator Lamp R1221 P21W DI*2423*A 153 49/00 Retro Reflector (Red/Rear) N/A N/A RE*2423*A 153 49/00 Rear Position / Stop Lamp S1221/5V P21W/5W RR*2423*A 153 6/00:Cat 2a Rear Direction Indicator Lamp R1221 P21W DI*2424*A 153 47/00 Retro Reflector (Red/Rear) N/A N/A RE*2424*A 153 49/00 Rear Position / Stop Lamp S1221/5V P21W/5W RR*2424*A 153 49/00 Rear Position / Stop Lamp S1221/5V P21W/5W RR*2424*A 153 1/00 Reversing Lamp R1221 P21W RL*2424*A 153 1/00 Reversing Lamp LED N/A LED SL*2332-H24*A 344	323 338 339 340 342 343 344		
2423 958616-00 47/00 Retro Reflector (Red/Rear) N/A N/A RE*2423*A 153 49/00 Rear Position / Stop Lamp S1221/5V P21W/5W RR*2423*A 153 49/00 Retro Reflector (Red/Rear) R1221 P21W DI*2424*A 153 49/00 Rear Position / Stop Lamp R1221 P21W DI*2424*A 153 47/00 Retro Reflector (Red/Rear) N/A N/A RE*2424*A 153 49/00 Rear Position / Stop Lamp S1221/5V P21W/5W RR*2424*A 153 1/00 Reversing Lamp R1221 P21W RL*2424*A 153 1/00 Reversing Lamp LED N/A LED SL*2332-H24*A 344 2426-H 959-040-801 49/00 Stop Lamp LED N/A LED SL*2332-H24*A 345	338 339 340 342 343	911-352-92	HNZ01
2423 958616-00 47/00 Retro Reflector (Red/Rear) N/A N/A N/A RE*2423*A 153 49/00 Rear Position / Stop Lamp \$1221/5V P21W/5W RR*2423*A 153 8 A9/00 Rear Direction Indicator Lamp R1221 P21W D1*2424*A 153 153 A7/00 Retro Reflector (Red/Rear) N/A N/A RE*2424*A 153 160 Rear Position / Stop Lamp \$1221/5V P21W/5W RR*2424*A 153 1700 Reversing Lamp R1221 P21W RL*2424*A 153 1700 Reversing Lamp R1221 P21W RL*2424*A 153 1800 A9/00 Rear Direction Indicator Lamp D1*2146-H24*A 344 1800 A9/00 Stop Lamp LED N/A LED SL*2332-H24*A	339 340 342 343 344	911-352-92	HNZ01
49/00 Rear Position / Stop Lamp \$1221/5V P21W/5W RR*2423*A 153 47/00 Rear Direction Indicator Lamp R1221 P21W D1*2424*A 153 47/00 Retro Reflector (Red/Rear) N/A N/A RE*2424*A 153 49/00 Rear Position / Stop Lamp \$1221/5V P21W/5W RR*2424*A 153 1/00 Reversing Lamp R1221 P21W RL*2424*A 153 2426-H 959-040-801 49/00 Stop Lamp LED N/A LED \$L*2332-H24*A 345	340 342 343 344	911-352-92	HNZ01
6/00:Cat 2a Rear Direction Indicator Lamp R1221 P21W DI*2424*A 153 2424 47/00 Retro Reflector (Red/Rear) N/A N/A RE*2424*A 153 49/00 Rear Position / Stop Lamp S1221/5V P21W/5W RR*2424*A 153 1/00 Reversing Lamp R1221 P21W RL*2424*A 153 Rear Direction Indicator Lamp B1*2146-H24*A 344 P2446-H 959-040-801 49/00 Stop Lamp LED N/A LED SL*2332-H24*A 345	342 343 344		
2424 958616-01 47/00 Retro Reflector (Red/Rear) N/A N/A N/A RE*2424*A 153 49/00 Rear Position / Stop Lamp \$1221/5V P21W/5W RR*2424*A 153 1/00 Reversing Lamp R1221 P21W RL*2424*A 153 6/00:Cat2a Rear Direction Indicator Lamp D1*2146-H24*A 344 2426-H 959-040-801 49/00 Stop Lamp LED N/A LED SL*2332-H24*A 345	343 344		
2424 958616-01 49/00 Rear Position / Stop Lamp S1221/5V P21W/5W RR*2424*A 153 1/00 Reversing Lamp R1221 P21W RL*2424*A 153 6/00:Cat2a Rear Direction Indicator Lamp D1*2146-H24*A 344 2426-H 959-040-801 49/00 Stop Lamp LED N/A LED SL*2332-H24*A 345	344		
49/00 Rear Position / Stop Lamp S1221/5V P21W/5W RR*2424*A 153 1/00 Reversing Lamp R1221 P21W RL*2424*A 153 6/00:Cat2a Rear Direction Indicator Lamp DI*2146-H24*A 344 2426-H 959-040-801 49/00 Stop Lamp LED N/A LED SL*2332-H24*A 345			
6/00:Cat2a Rear Direction Indicator Lamp DI*2146-H24*A 344 2426-H 959-040-801 49/00 Stop Lamp LED N/A LED SL*2332-H24*A 345	341	911-352-93	HNZ01
2426-H 959-040-801 49/00 Stop Lamp LED N/A LED SL*2332-H24*A 345			
	498	959-149-88	
49/00 Rear Position Lamp RP*2332-H24*A 345	509	959-149-87	9040
	502		
6/00:Cat2a Rear Direction Indicator Lamp DI*2146-V24*A 367	718	959-149-88	
2426-V 959-040-901 Stop Lamp LED N/A LED SL*2332-V24*A 367	722		9040
49/00 Rear Position Lamp RP*2332-V24*A 367	721	959-149-87	
	498	959-149-88	
2427-H 959-040-811 Stop Lamp LED N/A LED SL*2332-H24*A 345			9040
49/00	502	959-149-87	
	718	959-149-88	
	722	707 147 00	9040
49/00 Rear Position Lamp RP*2332-V24*A 367		959-149-87	7040
	980	959-149-95	
6/00:Cat2a Rear Direction Indicator Lamp DI*2146-H24*A 344		959-149-88	
2428-H 959-041-811 Stop Lamp LED N/A LED St. 2332-H24*A 345		737-147-00	9040
49/00	502	959-149-87	
		959-149-95	
6/00:Cat2a Rear Direction Indicator Lamp DI*2146-V24*A 367		959-149-88	9040
49/00	722		
Rear Position Lamp RP*2332-V24*A 367		050 700 72/7/	
2429 980760-80 6/00:Cat 2a Rear Direction Indicator Lamp DI*2161*A 454		958-780-73/74	
49/00	634	050 800 85	0760
	632	958-780-75	
	633	050 500 50/5/	
	443	958-780-73/74	
49/00	634		0760
	632	958-780-75	
	633		
	443	958-780-73/74	
49/00 LED N/A LED	634	958-780-75	
	632		0760
1/00 Reversing Lamp RL*1461*A 454	442	958-780-72	
47/00 Retro Reflector (Red/Rear) N/A N/A RE*2161*A 456	633		
2553 951068-02 48/00 Licence Plate Lamp G1210 R10W LP*2553*A 151	150	911-352-47	E1 22819
2555 001389-10 48/00 Licence Plate Lamp L125 C5W LP*2555*A 151	156	911-352-49	12815R4
2557 900967-03 48/00 Licence Plate Lamp HL124 T4W (2 Pieces) LP*2557*A 152	207	911-352-50	4151
2558 004525-00 48/00 Licence Plate Lamp L125 C5W (2 Pieces) LP*2558*A 153	326	911-352-85	22861
2559 959640-30 48/00 Licence Plate Lamp LED N/A LED LP*2559H*A 416	602	980-703-00	9640
2560 980869-00 48/00 Licence Plate Lamp LED N/A LED 2560*LP*C 467	799	958-315-24	0855
2902 002016-11 47/00 Retro Reflector (Red/Rear) N/A N/A RE*2902*A 151	180	911-352-51	0231290
2910 900913-04 47/00 Retro Reflector (Red/Rear) N/A N/A RE*2910*A 151	182	911-352-53	0231290
2915 002014-43 47/00 Retro Reflector (Red/Rear) N/A N/A N/A ECE E24	4 3R 0200300	911-352/3-55/50	020030
2916 002014-25 47/00 Retro Reflector (Amber/Side) N/A N/A N/A ECE E24	4 3R 0200300	911-352/3-56/48	020030
2917 002014-44 47/00 Retro Reflector (White/Front) N/A N/A N/A ECE E24	4 3R 0200300	911-352/3-57/49	020030
2919 004412-00 47/00 Retro Reflector (Amber/Side) N/A N/A RE*2919*A 152	233	911-352/3-58/48	02338
2920 004412-02 47/00 Retro Reflector (Red/Rear) N/A N/A RE*2920*A 152	294	911-352/3-70/50	02338

HELLA Part No.	Engineering Drawing No.	ADR No.	Function	Bulb(s)	Bulb Type	HELLA Ref. or ECE	FORS Ref: CRN or ECE	Instruction Sheet No.	Lamp Identification
2921	004412-01	47/00	Retro Reflector (White/Front)	N/A	N/A	RE*2921*A	15293	911-352/3-71/49	02338
2922	003326-04	47/00	Retro Reflector (Amber/Side)	N/A	N/A	RE*2922*A	15237	911-352/3-59/48	0292031
2922-2	003326-01	47/00	Retro Reflector (Amber/Side)	N/A	N/A	N/A ECE	E1 02 21395 R 3	911-352/3-59/48	E1 0221395
2923	003326-03	47/00	Retro Reflector (Red/Rear)	N/A	N/A	RE*2923*A	15296	911-352/3-72/50	0292031
2923-2BULK	003326-00	47/00	Retro Reflector (Red/Rear)	N/A	N/A	N/A ECE	E1 02 21395 R 3	HKG & ADR13/00	E1 0221395
2924	003326-05	47/00	Retro Reflector (White/Front)	N/A	N/A	RE*2924*A	15295	911-352/3-73/49	0292031
2925	004713-00	47/00	Retro Reflector (Amber/Side)	N/A	N/A	RE*2925*A	15234	911-352/3-60/48	02353
2926	342007-10	47/00	Retro Reflector (Red/Rear)	N/A	N/A	RE*2926*A	15298	911-352/3-74/50	02353
2927	342007-20	47/00	Retro Reflector (White/Front)	N/A	N/A	RE*2927*A	15297	911-352/3-75/49	02353
2934-H	980565-10	47/00	Retro Reflector (Red /Rear)	N/A	N/A	RE*2934-H*A	38243	959-150-34	5651
2934-V	980565-50	47/00	Retro Reflector (Red / Rear)	N/A	IN/ A	RE*2934-V*A	38244	737-130-34	5655
5237	959190-12	49/00 Cat S3	Centre High Level Brake Lamp	LED	N/A LED	BL*5237*B	15350	911-352-64A	523
5238	959191-12	49/00 Cat S3	Centre High Level Brake Lamp	LED	N/A LED	BL*5238*B	15349	911-352-65A	523
5239	959192-12	49/00 Cat S3	Centre High Level Brake Lamp	LED	N/A LED	BL*5239*B	15351	911-352-66A	523
5242	006631-00	49/00 Cat S3	Centre High Level Brake Lamp	W1221	W16W	BL*5242*A	15290	911-352-08	5242
5243	959071-53	49/00 Cat S3	Centre High Level Brake Lamp	LED	N/A LED	8-5243-08	23071	959-089-01	27547
5245	980887-30	/0/00 C-+ C2	Control High Lavel Books Laves	LED	N/A LED	5245*12*ST*C	45934	050 700 00	0000 4
5245-24V	980887-40	49/00 Cat S3	Centre High Level Brake Lamp	LED	N/A LED	5245*24*ST*C	45935	958-780-83	0880 A
5617 & 5617-0E	980670-00	76/00	Daytime Running Lamp	LED	N/A LED	N/A ECE	E24 87R-000002	980-703-10	E24 0002 (0670)
5618	980680-80	77/00	Davidiana Diversional anno	LED	N/A LED	N/A FCF	E2/ 07D 000001	980-703-12	F3/ 0001 (0/00)
5618-24V	980680-85	76/00	Daytime Running Lamp	LED	N/A LED	N/A ECE	E24 87R- 000001	980-703-24	E24 0001 (0680)
5619	980880-80	77.700	0 0 . 1	LED	N/A LED	DRL*1009*A	44200	050 700 07	0000
5619-24V	980880-85	76/00	Daytime Running Lamp	LED	N/A LED	DRL*1009-24V*A	44202	958-780-26	0880
5619V	980880-90	77.700	D : D : 1	1.50	N/A LED	1009V*DRL*C	45962	958-780-98	0000 B
5619V-24V	980880-95	76/00	Daytime Running Lamp	LED	N/A LED	1009V-24V*DRL*C	45965	958-780-98	0880 B
5630	980860-84	77.700	D : D : 1	1.50	N/A LED	N/A FOE	E0/ 07D 00E0/0	050 500 10	F2/ F2/2
5630-24V	980860-87	76/00	Daytime Running Lamp	LED	N/A LED	N/A ECE	E24 87R-005863	958-780-18	E24 5863
5631	980850-84	77.700	D : D : 1	1.50	N/A LED	N/A FOE	E0/ 07D 00E0/0	050 500 10	F2/ F2/2
5631-24V	980850-87	76/00	Daytime Running Lamp	LED	N/A LED	N/A ECE	E24 87R-005862	958-780-19	E24 5862
5636	980970-80	77.700	D : D : 1	1.50	N/A LED	DRL*1013*A	44776	050 500 50	0070
5636-24V	980970-85	76/00	Daytime Running Lamp	LED	N/A LED	DRL*1013-24V*A	44783	958-780-52	0970

1	PAGE	1125	141	1468-24V	57	1656	201
		1126	142	1468-24VBL	57	1657	201
1003	97	128 922 02	230	1468-BL	57	1663	201
1004	98	1308	144	1468V	57	1720	198
1005	96	1309	145	1468V-24V	57	1721	198
1005-24V	96	1310	143	1490	54	1722	198
1006	99	1312	146	1490-BL	54	1724	198
1007-24V	99	1313	147	1490-BULK	54	1726	199
1008	96	1314	148	1512	180	1726-24V	199
1008-24V	96	1322	150	1519	179	1728	199
1009	97	1323	151	1519-24V	179	1728-24V	199
1009-24V	97	1324	140	1520	339	1729	199
1009-24VBL	97	1325	141	1520LED	339	1730	200
1009-BL	97	1326	142	1521LED	339	1731	200
1009V	97	1358LED	111	1524	339	1732	200
1009V-24V	97	1365	136	15297700		1732-24V	200
1013		1366	136	1533	179	1733	200
1013-24V	94	1366C		1533-24V	179	1733-24V	200
1016		1366C-BLUE		1533-DT24V	179	1735	
1017		1366CHROME		1547		1F0 011 988-121	
1024		1369		1547-24V		1GA 958 060-011	
1025		1378		1547-LED		1GA 958 060-111	
1027		1378CHROME		1547-LEDEV		1GA 958 060-201	
1029-24V		1380		1547-RE		1GA 958 060-401	
1029H1-24V		13839700		1551-RE		1GA 958 060-501	
1030-24V		1389		1557		1GA 958 060-601	
1030-24V		1394		1557-HD		1GA 996 197-001	
1032-G2				1557-HDLR			
1040		1395				1GA 996 197-011	
1041		1395HD		1560 1560-LR		1GJ 011 872-221	
1042		1396HD		1561-12V		1GJ 011 872-231 1GJ 011 872-241	
1043		1397HD		1561-12V			
1044		1398HD		1562		1GJ 011 872-501 1GJ 011 872-511	
1053		1405		1562-BL 1562-HD		1GJ 011 872-521 1GJ 958 040-501	
1054				1562-HD		1GJ 958 040-501	
1055		1413 1430-H					
1055HD		1430-H		1563C 1563C-RE		1GJ 958 040-601	
1056						1GJ 958 084-001	
1056LED		1430-HSS		1564		1GJ 958 084-011	
1058		1430-V		1564-LR		1GJ 958 084-101	
1058HD		1433		1566-HD		1GJ 958 084-111	
1058LED		1433-BL		1566-HDLR		1GJ 958 084-201	
1089		1433-BULK		1567		1GJ 958 084-211	
1108		1446-H		1599HD		1GJ 958 130-521	
1109		1446-V		1608		1GJ 958 130-621	
1110		1447L		1610		1GJ 958 130-651	
1112		1447R		1611		1GJ 958 334-011	
1113		1459		1612		1GJ 958 334-021	
1114		1461		1613		1GJ 958 334-031	
1115		1461-BL		1614		1L3 996 002-221	
1122		1465		1614-MAG		1L3 996 002-411	
1123		1467		1616		1LA 990 185-011	
1124	140	1468	57	1653	198, 203	1LA 993 975-071	120

1LA 993 975-081	120	2059S	30	2138	50	2311P-BULK	37
1LE 996 374-031	120	2059S-BULK	30	2142	74	2312	35
1LE 996 374-041	120	2060	31	2144	8	2312-BULK	35
1LG 007 150-111	118	2060-BULK	31	2144-24V	8	2317	50
1LG 007 150-121	118	2060S	31	2145	67	2318	58
1LJ 247 046-071	118	2060S-BULK	31	2145-24V	67	2318-24V	58
1LJ 247 046-081	118	2061	37	2146-H24	48	2318-24VBL	58
1LL 008 053-591		2061-BULK	37	2146-HCS	21, 48	2318-BL	58
1LL 008 053-601	119	2061P	37	2146-V24		2320	8
1LL 009 998-011	105	2061P-BULK	37	2146-VCS	48	2320-24V	68
1LL 009 998-051		2062	37	2147	71	2321	
1ML 012 488-011		2062-BULK		2148		2321-24V	
1N0 011 988-001		2062P		2151		2330	
1N0 011 988-011		2062P-BULK		2151-BULK		2330-BULK	
		2064		2151-H		2330-H	
2	PAGE	2066		2151-HBL		2330-HBL	
-	TAGE	2071		2151-HBULK		2330-HBULK	
2000	70	2071-BULK		2151-HCS		2330-HSS	
2026		2073		2151-HSS		2330-V	
2026-BULK		2073-BULK		2151-H55		2331-BULK	
2027		2074		2151-VCS	•	2332-H24	
2027-BULK		2074-BULK		2152-BULK		2332-V24	
2027P		2076		2153		2334-12V	
2027P-BULK		2076-BULK		2154		2334-24V	
2031		2083		2155		2359	
2031-BL		2083-BULK		2155-24V		2361	
2033		2083S		2156-12V	0	2361-BL	
2033-BL	38	2083S-BULK	30	2156-24V	0	2365	
2041	8	2100	70	2159	52	2366	39
2041-24V		2101		2161	46	2366-BL	
2046	67	2105	51	2161-BL	46	2366-BULK	39
2046-24V	67	2107	53	2161-CS	21, 46	2367	52
2051	33	2108-GMD	53, 99	2165	52	2375-12V	59
2051-BULK	33	2108-GMD24V	53, 99	2167	52	2375-24V	59
2053	32	2109	56	2168	58	2377	28
2053-BULK	32	2109-24V	56	2168-24V	58	2377-BL	28
2053CHROME	32	2109-24VBL	56	2168-24VBL	58	2377-TP	28
2053-GMD	32	2109-BL	56	2168-BL	58	2378	26
2053-GMDBULK	32	2109V	56	2303	70	2378-6M	26
2054	33	2109V-24V	56	2305	63	2378-6MBULK	26
2054-BULK	33	2109V-24VBL	56	2306	63	2378-BL	26
2055	62	2109V-BL	56	2307	33	2378-BULK	26
2055-BULK	62	2127	74	2307-BULK	33	2378-CS	21, 26
2056	62	2128LED	51	2308	62	2378-DT	27
2056-BULK	62	2130	54	2308-BULK	62	2378-DTCS	21, 27
2057	62	2130-BL	54	2309	38	2378-TP	26
2057-BULK	62	2130-BULK	54	2310	31	2380	29
2058		2131-CS	51	2310-BULK	31	2380-BL	29
2058-BULK	36	2133	39	2310S	31	2380-BULK	29
2058P	36	2133-BL	39	2310S-BULK	31	2380-DT	29
2058P-BULK	36	2133-BULK	39	2311	37	2380-DTGMD	29
2059		2133-CS		2311-BULK		2380-GMD	
2059-BULK		2135LED		2311P		2381	
							/

2383-24VCS	27	2636	230	2915-BL	78	2JA 958 340-621	213
2383-DT24VCS		2638		2916		2JA 958 340-631	
2384	71	2639	230	2916-1	78	2JA 958 358-001	231
2390	54	2641-12V	222	2917	78	2JA 958 358-011	231
2390-BL	54	2641-24V	222	2917-1	78	2JA 958 358-201	231
2390-BULK		2641HB	222	2919	79	2JA 958 358-211	231
2391		2641HB-24V		2920		2JA 959 037-501	
2392L		2652		2920-BL		2JA 959 037-511	
2392R		2652-24V		2920-BULK		2JA 959 950-551	
2394		2652-SW		2921		2JA 959 950-561	
2394-6M		2652-SW24V		2922		2JA 980 629-001	
2394-6MBULK		2687		2922-2		2JA 980 629-501	
2394-BULK		2690		2923		2JA 980 629-601	
2395		2691		2923-2		2JA 980 630-501	
2395-6M		2692		2923-2BL		2JA 980 630-511	
2395-6MBULK		2708		2923-2BULK		2JA 980 630-601	
2395-BULK		2709		2923-BL		2JA 980 630-611	
2395-BULK						2JA 980 630-611	
		2710		2923-BULK			
2397		2711		2924		2JA 980 631-511	
2397-24V		2712		2925		2JA 980 631-601	
2397-24VBULK		2713		2926		2JA 980 631-611	
2397-BULK		2714		2926-BL		2JA 980 820-001	
2399		2715		2926-BULK		2JA 980 820-011	
2399-BL		2716		2927		2JA 980 820-101	
2399-BULK		2716-24V		2930		2JA 980 820-111	
2399-TP		2717		2930-BULK		2JA 980 828-001	
2422		2717-24V		2934H		2JA 980 828-011	
2422-24V	69	2718		2934V		2JA 980 828-101	
2423		2718-24V		2AA 713 628-021		2JA 980 828-111	
2423-24V		2719		2AA 713 628-031		2JA 980 881-402	222
2424		2719-24V		2AA 713 628-041		2JA 980 881-502	
2424-24V		2720		2BA 009 001-001		2JA 980 881-602	
2426-H	49	2720-24V	283	2BA 009 001-071	72	2JA 980 881-702	
2426-V	49	2721	283	2BM 011 788-041	63	2JA 980 881-802	222
2427-H	49	2722	283	2BM 011 788-051	63	2JA 980 881-902	222
2427-V	49	2723	283	2JA 958 109-031	215	2JA 980 940-001	214
2428-H	49	2724	283	2JA 958 109-131	215	2JA 980 940-011	214
2428-V	49	2755	312	2JA 958 110-031	215	2JA 980 940-101	214
2429-CS	47	2757	312	2JA 958 110-131	215	2JA 980 940-111	214
2430-CS	47	2758	312	2JA 958 121-001	220	2JA 980 940-201	214
2431-CS	21, 47	2759	312	2JA 958 121-011	220	2JA 980 940-211	214
25416300	105, 106, 109	2761	272	2JA 958 121-401	220	2JA 980 940-301	214
2553	76	2762	257	2JA 958 121-411	220	2JA 980 940-311	214
2553-24V	76	2763	270	2JA 958 340-011	213	2PF 009 001-081	72
2555	76	2766	279	2JA 958 340-021	213	2PS 008 645-001	
2557	76	2770	312	2JA 958 340-101	213	2PS 008 645-011	63
2557-24V	76	2771	312	2JA 958 340-111	213	2PS 345 600-001	63
2559	26, 28, 41, 55	2902	78	2JA 958 340-121	213	2PS 345 600-011	
2559-BULK	41	2910	78	2JA 958 340-131	213	2RL 012 983-001	189
2560	40	2910-2	78	2JA 958 340-511	213	2SB 009 001-061	72
2560-BULK	40	2910H	78	2JA 958 340-521	213	2SB 009 362-021	73
2604	215	2915	78	2JA 958 340-601	213	2VP 008 204-061	
2633	230	2915-1	78	2JA 958 340-611	213	2VP 341 419-127	66

2VP 341 419-137	66	3040	249	4009	279	4475	259
2VP 343 640-027		3053	236	4010	279	4476	260
2VP 343 640-037		3054		4020		4477	
2XA 959 050-321		3055		4021		4478	
2XD 012 985-001		3056		4022		4479	
2XD 013 979-001		3057		4023		4480	
2XD 013 979-011		3058		4056		4481	
2XM 910 412-011		3059		4100		4482	
2XM 910 413-011		3060		4151		4483	
2XM 910 413-021		3061		4152		4484	
2XM 910 414-011		3062		4202		4485	
2XM 910 414-021		3063		4203		4486A	
2XM 910 415-001		3064	243	4206	257	4486G	
2XM 910 416-011	338	3064L	243	4302	256	4486R	263
2XM 910 426-101	334	3065	243	4411	272	4487A	263
2XM 910 426-111	335	3076	238	4412	272	4487B	263
2XM 910 426-121		3077	238	4420	258	4487G	263
2XM 910 529-051	337	3078	236	4421	258	4487R	263
2XM 910 529-061	337	3078-BULK	236	4422	258	4501	271
2XM 910 529-071	337	3078R	236	4423	258	4503	271
2XM 910 529-081	334, 335	3079	237	4424	258	4506	271
2XM 910 529-091	337	3079-BULK	237	4426	261	4507	270
2XM 910 529-101	336	3079R	237	4427	261	452341	193
2XM 910 529-111	336	3080	240	4428	261	454201A	193
2XM 910 529-121	336	3080-BULK	240	4429	261	454201A-24V	193
2XM 910 529-141		3080R-BULK		4430		454201AMAG	
2XM 910 601-001		30805		4431		454201B	
2XM 910 602-011		3081		4432		454201R	
2XM 910 603-001		3081-BULK		4433		454201R-24V	
2XM 910 605-001		3081R-BULK		4434		454205A	
2XM 910 606-001		3082		4435		454217	
2XS 205 020-041		3082-BULK		4436		454218	
2ZR 009 001-011	72	3083		4437		4550	
	D. 0.	3083-BULK		4444		4551	
3	PAGE	3084		4445		4553	
		3085		4446	259	4554	281
3014		3086	242	4447	259	4560	280
3015	250	3086-24V	242	4448	259	4562	280
3016	249	3087	242	4451	256	4640	274
3016LED1	249	3087-24V	242	4452	256	4641	274
3016LED2	249	3090	93, 100, 244	4452-BULK	256	4648	275
3017	250	3090-BULK	100, 244	4453	257	4649	274
3018	250	3091	93, 100, 244	4454	257	4650	274
3026	248	3091-BULK	100, 244	4455	256	4652	274
3027	248	3099	245	4456	255	4653	275
3028	248	3101	245	4457	257	4654	275
3032	251	3101-BULK	245	4460	255	4658	275
3033	251			4461	256	4720	276
3034	251	4	PAGE	4470	259	4722	276
3036				4471		4723	
3037		4005	278	4472		4724	
3038							
	247	4008	278	4473	260	4771	277
3039		4008		4474		47714901	

4901X	285	4985-S	306	6004	294	8	PAGE
4902	285	4986-P	306	6005	294		IAGE
4907	288	4986-S	306	6009	298	8000	284
4908	288	4988-DT	106, 107	6010	298	8003	248
4909	285	4988-P	106, 107	6012	296	800719	90, 191, 199, 200, 202
4911	285	4991	313	6013	298	8007FM19	90, 191, 199, 200, 202
4911-BULK	285	4992	313	6014	296	8007RA19	90, 191, 199, 200, 202
4912	285	4993	313	6020	295	800819	90, 191, 199, 200, 202
4912-BULK	285	4994	313	6021	297	8009	286
4914	292	4995	313	6022	297	8009-BULK	286
4915	292	4996	313	6023	297	8022	284
4916	292			6025	296	8027	201
4917	292	5	PAGE	6026	296	8030	132
4918	292			6027	296	8032	128, 129, 132, 161
4920	286	5227	272	6028	295	8115	138
4920-BULK	286	5237	61	6029	295	8120	135
4921	26, 28, 55, 286	5238	61	6036	294	8121	144
4921-BULK	286	5239	61	6037	294	8122	145
4939	293	5243		6037-24V	294	8123	143
4943-R	293	5243-24V	0	6041	296, 297	8125	136
4950	293	5243-24VCLEAR	0	6042	299	8126	134, 136
4952	293	5243-CLEAR	60	6043	299	8127	134
4960	304	5245	57	6044	299	8136	143
4960FM	304	5245-24V	57	6047	300	8137	144
4960MF	304	5617	98	6048	300	8138	145
4960-P	34, 35, 82, 304	5617-0E	98	6049	300	8141	134, 136
4961	304	5618	96	6050-SA	299	8147	150
4962	304	5618-24V	96	6051	299	8148	151
4962-P	104	5619	97	6052	299	8155	138
4963	305	5619-24V	97	6EH 007 832-011	264	8156	140
4963-P	27, 29, 82, 120, 305	5619V	97	6EH 007 832-021	264	8157	141
4964	305	5619V-24V	97	6EH 007 832-041	264	8158	142
4965	305	5630	94	6FH 007 832-051	265	8163	135
4972-H1	121	5630-24V	94	6FH 007 832-061	265	8200	308, 310
4972-H4	121	5630-24VBL	94	6FH 007 832-101	265	8200S	311
4972-H7	121	5630-BL	94	6FH 007 832-161	265	8201	308, 310
4973	241	5631	95	6GM 007 832-191	264	8201S	311
4973-BULK	241	5631-24V	95	6GM 007 832-221	264	8202	308, 310
4973-M	243	5631-BL	95	6GM 007 832-251	264	8203	308, 310
4973S	240	5636	94	6HH 007 832-281	265	8204	308, 310
4980	307	5636-24V	94	6HH 007 832-301	265	8204S	311
4981-P	306	5636-BL	94	6RH 007 832-351	265	8205	308, 310
4981-S	306	5DD 008 319-501	121	6RH 007 832-377	265	8205S	311
4982	306	5DV 007 760-631	121	6RH 007 832-381	265	8210	308, 310
4982-P	63, 306	5DV 007 810-171	121	6RH 007 832-391	265	8211	308, 310
4982-S	306	5DV 008 855-001	121	6RH 007 832-411	265	8212	308
4983	306	5DV 008 856-001	121	6RH 007 832-441	265	8213	308, 310
4983-P	306			6RH 007 832-461	265	8213S	311
4983-S	306	6	PAGE			8214	308, 310
4984	306			7	PAGE	8214S	311
4984-P	306	6001	295			8215	308
4984-S	306	6002	295	7013	302	8220	308, 310
4985-P	306	6003	295	7037	302	8221	308, 310

8222	308 310	8343UV-BULK	215	8719	320	8777MINI	31.6
8223		8344UV		8720		8779	
8230		8344UV-BULK		8720-S		8790	
8230S		8345		8721		8790-FLB	
8231		8345UV		8721-S		8790-FLBS	
8231S	45, 311	8345UV-BULK		8722		8790-FLFE	
8232	309, 310	8346UV	315	8722-S	321	8790-FLFM	324
8232S	311	8346UV-BULK	315	8724	322	8790-FLFS	323
8234S	314	8452	313	8725	322	8790-FLM	325
8234SY	314	8453	313	8736	318	8790-FLMNP	324
8235	309, 310	8454	313	8737	318	8791	317
8236S	311	8455	313	8738	318	8791-FLB	325
8240	309	8500	308	8739	318	8791-FLBS	325
8240S	311	8501	308	8740	318	8791-FLFE	323
8241	309, 310	8502	308	8741	318	8791-FLFM	324
8241S	311	8503	308	8750	318	8791-FLFS	323
8242	309	8504	308	8751	318	8791-FLM	325
8243	309	8505	308	8753	318	8791-FLMNP	324
8243S	311	8510	308	8754	318	8792	317
8244	309, 310	8511	308	8755	318	8792-FLB	325
8244S	311	8512	308	8756	318	8792-FLBS	325
8245	309	8513	308	8757	318	8792-FLFE	323
8245S	311	8514	308	8758	318	8792-FLFM	324
8246	309	8515	308	8759	318	8792-FLFS	323
8246S	311	8520	308	8760	318	8792-FLM	325
8247	309, 310	8521	308	8761	318	8792-FLMKP	324
8247S	311	8522	308	8765	319	8793	317
8248	309	8523	308	8766	319	8793-FLB	325
8249S	311	8530	309	8768	319	8793-FLBS	325
8250-2	314	8530S	311	8769	319	8793-FLFE	323
8250-4	314	8531	309	8770	316	8793-FLFM	324
8250-6	314	8531S	311	8770LP	317	8793-FLFS	323
8271	303	8532	309	8770MINI	316	8793-FLM	325
8272	303, 310	8532S	311	8771	316	8794	317
8273	303	8535	309	8771LP	317	8794-FLB	325
8274	303	8540	309	8771MINI	316	8794-FLBS	325
8275	303, 305	8541	309	8772	316	8794-FLFE	323
8280	310	8542	309	8772LP	317	8794-FLFM	324
8281	310	8543	309	8772MINI	316	8794-FLFS	323
8282	310	8544	309	8773	316	8794-FLM	325
8284	310	8545	309	8773LP	317	8794-FLMKP	324
8298	303, 307	8546	309	8773MINI	316	8795	317
8312	314	8547	309	8774	316	8795-FLB	325
8320	314	8548	309	8774LP	317	8795-FLBS	325
8343	315	8573	267, 309	8774MINI	316	8795-FLFE	323
8344	315	8701	319	8775	316	8795-FLFM	324
8334UV	315	8703		8775LP	317	8795-FLFS	
8335UV	315	8704	320	8775MINI	316	8795-FLM	
8336UV		8707		8776		8796	
8341UV	315	8713	319	8776LP	317	8796-FLB	
8342UV		8714		8776MINI		8796-FLBS	
8342UV-BULK		8715		8777		8796-FLFE	
8343UV	315	8718	320	8777LP	317	8796-FLFM	324


8796-FLFS	8JB 005 949-001290	9.1165.01136	9.1726.01199
8796-FLM	8JB 005 949-031289	9.1178.01	9.1727.01199
8796-FLMKP324	8JB 007 242-011291	9.1308.01 144	9.1728.01
8797-FLB	8JB 007 242-021 291	9.1309.01 145	9.1730.01 200
8797-FLBS	8JB 007 645-021287	9.1310.01143	9.1737.91
8797-FLFM324	8JB 007 645-031287	9.1312.01146	9.1797.91
8797-FLFS323	8JB 011 895-001288	9.1313.01147	9.2006.01
		9.1314.01148	9.2006.02
8797-FLM	8JD 008 151-051120		
8798-FLB	8JD 156 150-80773, 87,	9.1324.01	9.2041.01
8798-FLBS325	108, 109	9.1325.01141	9.2041.09-BULK
8798-FLM	8JD 162 581-80273, 87	9.1326.01142	9.2042.01
8EV 003 361-002302	8KA 004 797-021285	9.1358.01113	9.2043.0177
8EV 003 361-012302	8KA 007 648-001287	9.1365.02136	9.2043.0567, 69
8EV 003 361-022302	8KA 007 648-021287	9.1365.05136	9.2046.09-BULK67
8HG 005 436-011202	8KA 007 648-041291	9.1365.06136, 138	9.2053.0781
8HG 007 647-001291	8KA 958 360-001217	9.1365.07136	9.2053.0832, 33, 81
8HG 713 626-001266	8KA 958 361-001217	9.1366.01	9.2053.08-BULK81
8HG 714 504-001266	8KA 958 363-001217	9.1366.02136, 137	9.2053.10-BULK81
8HG 716 734-001266	8KB 958 304-001174	9.1366C.01136, 137	9.2053.11-BULK81
8HG 716 735-001266	8PD 004 508-031287	9.1366C.01BL136, 137	9.2053.12-BULK81
8HG 958 000-011221	8RA 009 001-03173	9.1366C.07136, 137	9.2053.13-BULK81
8HG 958 000-021221	8TG 009 428-087301	9.1378.01138, 139	9.2053.14-BULK81
8HG 958 029-00140, 85	8XS 186 530-012140	9.1380.01138	9.2053.15-BULK81
8HG 958 053-801160	8XS 186 531-012141	9.1389.01134, 135	9.2053.20-BULK81
8HG 958 128-811129, 161, 162,	8XS 186 532-012142	9.1394.01135	9.2058.0936, 37, 82
163, 177	8XS 958 336-021132	9.1511.01	9.2058.1036, 37, 82
8HG 958 139-071129, 161	8XS 958 336-031132	9.1511.06180	9.2073.0934, 35, 82
8HG 958 139-841133	8XS 958 336-111132	9.1511.08180	9.2073.1134, 35, 82
8HG 958 139-851133	8XS 958 337-021129, 132, 161	9.1512.01180	9.2140.0177
8HG 958 455-001269	8XS 958 337-031129, 132, 161	9.1513.01	9.2141.0177
8HG 958 455-011269	8XS 958 337-111129, 132, 161	9.1520.06	9.2143.0177
8HG 958 455-101269		9.1520.07181, 339	9.2144.0167, 69
8HG 958 455-111269	9 PAGE	9.1524.06	9.2155.0575
8HG 958 455-201269		9.1530.07179, 181	9.2304.0177
8HG 958 455-211269	9.1009.0956, 57, 59, 85, 97,	9.1531.08181	9.2310.09-BULK30, 31, 40,
8HG 958 455-301269	220, 221, 222	9.1533.01	82, 225
8HG 958 455-311269	9.1009.1056, 57, 59, 85, 97,	9.1533.05179. 181	9.2310.10-BULK82, 225
8HG 958 456-001269	220, 221, 222	9.1533.08	9.2310.11-BULK
8HG 958 456-101269	9.1025.07117	9.1534.05	9.2310.12-BULK
8HG 959 952-00283, 210	9.1027.01	9.1549.05178. 179. 181	9.2310.13-BULK
8HG 959 952-01283, 210	9.1027.02	9.1557.0534, 35, 164, 166,	9.2310.14-BULK82, 225
8JA 005 951-001290	9.1027.04	167, 168, 169, 171, 181	9.2310.15-BULK82, 225
8JA 005 951-061			
	9.1029.09107, 108	9.1564.08	9.2310.16-BULK82, 225
8JA 005 952-001290	9.1029.10107, 109	9.1655.01	9.2319.01
8JA 005 952-005290	9.1029.11105, 106, 107	9.1656.01	9.2320.0167, 69
8JA 007 241-021	9.1029.12104, 107	9.1657.01	9.2320.08
8JA 007 241-031291	9.1108.01	9.1663.01	9.2320.08-24V67
8JA 007 644-041287	9.1110.01143	9.1717.01198	9.2330.10
8JA 007 644-051287	9.1113.01147	9.1718.01198	9.2330.1180
8JA 008 969-001290	9.1115.08149	9.1719.01198	9.2330.12
8JA 011 896-001288	9.1124.01140	9.1723.01198	9.2330.1380
8JA 713 631-001267	9.1125.01141	9.1724.01198	9.2330.1480
8JA 715 600-001267	9.1126.01142	9.1725.01198	9.2330.1580

9.2330.1680	9.4980.21	307	98050321	227	98095003	158, 229
9.2330.1780	9.4982.05	306, 307	98050721	227	98095023	158
9.2361.0884	9.4983.05	306, 307	98050821	227	9DX 153 746-011	119
9.2361.0984	9.5240.30	41, 84	98057300	229	9EL 128 922-011	230
9.2366.0883, 210	9.5243.05	60, 86	98057310	158, 229	9EL 145 103-011	118
9.2366.1183, 210	9.5630.03	101	98057330	158	9EL 145 104-011	118
9.2366.1738, 83, 210	9.5630.04	101	98058221	226	9EL 152 889-001	66
9.2368.0177	9.5636.03	101	98058321	226	9EL 990 186-001	120
9.2377.0880	9.5636.04	101	98058501	226	9EL 990 186-101	120
9.2378.0880	9.6008.06	298	98058503	226	9ES 144 433-031	118
9.2378.10-BULK80	95901140	194	98058520	226	9ES 144 434-031	118
9.2378.11-BULK80		194		226	9FF 126 444-001	
9.2378.12-BULK80		194		226	9FF 713 627-001	
9.2378.13-BULK80		194		226	9FF 713 627-011	
9.2378.14-BULK80		196		226	9FF 713 627-031	
9.2378.15-BULK80		196		226	9GD 958 028-001	
9.2378.16-BULK80		195		226	9GD 959 155-507	
9.2391.08		195		226	9GD 959 515-127	
9.2394.08		218		216	9GD 959 515-207	
9.2394.09 44.45.83		218		219	9GD 959 517-007	
9.2396.01		195		228	9GD 980 867-007	
9.2397.01		195		228	9GD 980 867-507	
9.2422.09		195		228	9GH 113 763-001	
9.2423.09		197		84	9GH 126 647-011	
9.2559.02		227		84	9GH 152 654-007	
9.2559.08		227		84	9GH 958 748-007	
9.2559.0941, 85		227		84	9HB 161 122-007	
9.2559.1941, 85		227		80	9HB 163 085-012	
9.2604.05		215		80	9HB 713 629-001	
9.2642.02373		215		159	9MK 726 759-831	
9.2643.02373		224		159	9MK 726 762-831	
9.2652.0956, 57, 59, 85, 97,		224		159	9XD 161 119-007	
220, 221, 222		224		159	9XT 713 630-001	
9.2652SW.09220		224		159	9XT 713 630-011	
9.2652SW.10220	95968070	224		159	9XT 713 630-021	
9.2859.02179		224	98085510	225	9XT 713 630-031	268
9.454201.05193	95968090	224	98085515	225	9XT 713 630-101	268
9.454201.07193	95968500	30, 31, 81, 225	98085525	225	9XT 713 630-121	268
9.4901.05	95968506	81, 225	98085535	225	9XT 713 630-131	268
9.4960.01304	95968600	81, 225	98085540	225	9XT 713 630-181	268
9.4960.02304	95968601	81, 225	98085550	225	9XT 713 630-201	268
9.4960.03304	95970010	219	98087900	221	9XT 713 630-221	268
9.4960.04	95970400	219	98087910	221	9XT 713 630-231	268
9.4960.05	95982050	210	98091004	197	9XT 713 630-251	268
9.4980.01307	95999310	227	98091024	197	9XT 713 630-261	268
9.4980.02307	95999311	227	98091044	197	9XT 713 630-271	268
9.4980.03	95999354	226	98091064	197	9XT 713 630-281	268
9.4980.04307	95999360	226	98091074	197	9XT 713 630-291	268
9.4980.05307	98050051	227	98091100	194	9XT 713 630-301	268
9.4980.06307	98050071	227	98091120	194	9XT 713 630-351	268
9.4980.07307	98050151	227	98091140	194	9XT 713 630-371	268
9.4980.09307	98050171	227	98091160	194	9XT 713 630-391	268
9.4980.20307	98050221	227	98091170	194	9XT 713 630-401	268

9XT 713 630-421	268	CA1255-BULK	355	D1S-5K	353		
9XT 713 630-461		CA1255CB		D1SUP		K	PAGE
9XT 713 630-481		CA1255LL		D2R		K1210	370
9XT 713 630-491		CA1255UM		D2R-5K		K1210-BULK	
9XT 713 630-501		CA1255UP		D2S		K1221	
9XT 713 630-511		CA1255X		D2S-5K		K1221-BULK	
9XT 713 630-521		CA1255XU		D2SUP		K2410	
9XT 713 630-531		CA2470		D3S		K2410-BULK	
9XT 713 630-551		CA2470-BULK		D4S	352	K2421	
9XT 713 630-561		CA2470TS		_	D105	K2421-BULK	370
9XT 713 630-621		CA2470TS-BULK		F	PAGE		
9XT 713 630-641		CAP1221				L	PAGE
9XT 713 630-681		CAP1221/5		FD1221	364		
9XT 713 630-691	268	CAP1221/5-BULK				L1210	
9XT 713 630-701	268	CAP1221-BULK	368	G	PAGE	L125	370
9XT 713 630-711	268	CAPY1221	368			L125-BULK	370
9XT 714 300-011	268	CB1265	360	G1210	366	L125LL	370
9XT 714 300-031	268	CB1265CB	360	G1210-BULK	366	L2410	370
9XT 714 300-051	268	CB1265UP	360	G125	366	L2410-BULK	370
9XT 714 300-131	268	CC1255	360	G125-BULK	366	L245	370
9XT 714 300-141	268	CC1255CB	360	G125LL	366	L245-BULK	370
9XT 714 300-181	268	CC1255UP	360	G2410	366	LLED125	371
9XT 714 300-191	268	CD1255	357	G2410-BULK	366	LLED125-WW	371
9XT 714 300-201	268	CD2470	357	G2410-TS	366		
		CE1235	358	G245	366	М	PAGE
A F	PAGE	CF1219		G245-BULK			
		CF1227-880		G245-TS		M123	370
A1245/40	363	CF1227-881		GD125		M123-BULK	
A2455/50		CF1227-889		GD245		M243	
712-4007 00		CF1227-890		00240		M243-BULK	
В	PAGE	CF1227-H27W/1		н	PAGE	14240 BOLI	
		CF1227-H27W/2		n .	PAGE	N	PAGE
B1245/40	2/2	CF1237-862		H122	2/7	N	PAGE
D1Z43/ 40	203			H123		N1210	370
c	PAGE	CF1237-893 CF1237-894					
Г	AUL			H123-BULK		N1210-BULK	370
040400	05/	CF1237-896		H126			
C12100		CF1237-898		H126-BULK		R	PAGE
C1255		CF1250-885		H242			
C1255-BULK		CF1250-886		H242-BULK		R1221	
C1255CB	356	CF1265	358	HL124	367	R1221-BULK	364
C1255LL	356	CG1255	359	HL124-BULK	367	R1221LL	364
C1255UP	356	CG1255CB	359	HL124BV	367	R2418	364
C1255X	356	CG1255UP	359	HL244	367	R2421	364
C1255XU	356	CG1255X	359	HL244-BULK	367	R2421-BULK	364
C24100	356	CG2470	359	HL244-TS	367	R2421-TS	364
C24100-BULK	356	CG2470TS	359	HL247	367	RQ1221	364
C2455	356	CH1242	359	HLLED124	367	RQ2421	364
C2455-BULK	356	CI1255	360	HLLED124-WW	367	RY1221	364
C2470	356					RY1221-BULK	364
C2470-BULK	356	D	PAGE	J	PAGE	RY2421	364
C2470TS	356					RY2421-TS	364
C2470TS-BULK	356	D1R	353	J122	371		
CA1255	355	D1S	353	J243	371		

S PAGE
S1221/5V365
S1221/5V-BULK
S1221/5VLL
S2421/5-TS365
S2421/5V
S2421/5V-BULK
SEG 700DLX341
SEG 700L
SZ1221/4365
T PAGE
TL8W/336J373
U PAGE
U1245372
U2445
02443
W PAGE
W121.2368
W121.2-BULK
W1216369
W122369
W1221369
W123369
W125369
W125-BULK369
W125BV369
W125LL369
W241.2368
W241.2-BULK368
W242-BULK369
W243369
W245369
W245-BULK369
WBL122368
WD121.2-BULK371
WD241.2-BULK371
WLED125369
WLED125-WW369
WP1227365
WP1227/7365
WPA1227/7365
WI A1227/7303
WS1212
WS1212369

Х	PAGE
XD12100/90	354
XD12100/90-BULK	
XD1260/55	
XD1260/55-BULK	
XD1260/55CB	
XD1260/55LL	
XD1260/55UM	
XD1260/55UP	
XD1260/55X	
XD1260/55X-BULK	354
XD1260/55XU	354
XD24100/90	354
XD24100/90-BULK	354
XD2475/70	354
XD2475/70-BULK	354
XD2475/70TS	354
XD2475/70TSBULK	354
XE1260/55	363
XE2475/70	363
XH1215/55	361
XN000	373
XN451	373
V	
	PAGE
T	PAGE
YC12100	
YC12100 YC12100-BULK	357
	357
YC12100-BULK	357 357
YC12100-BULK YC1235	357 357 357
YC12100-BULK	357 357 357 357
YC12100-BULK YC1235 YC1255 YC1255-BULK	357 357 357 357 357
YC12100-BULK YC1235 YC1255 YC1255-BULK YC1255CB	357 357 357 357 357
YC12100-BULK YC1235 YC1255 YC1255-BULK YC1255CB YC1255LL	357 357 357 357 357 357
YC12100-BULK	357 357 357 357 357 357 357
YC12100-BULK	357 357 357 357 357 357 357 357
YC12100-BULK YC1235 YC1255 YC1255-BULK YC1255CB YC1255LL YC1255UP YC1255X	357357357357357357357357357
YC12100-BULK	357357357357357357357357357357
YC12100-BULK	357357357357357357357357357357357
YC12100-BULK YC1235 YC1255 YC1255-BULK YC1255CB YC1255LL YC1255UP YC1255X YC24100 YC24100-BULK YC2455 YC2455-BULK	357357357357357357357357357357357357
YC12100-BULK	357357357357357357357357357357357357
YC12100-BULK	357357357357357357357357357357357357357
YC12100-BULK YC1235 YC1255 YC1255-BULK YC1255CB YC1255UP YC1255X YC24100 YC24100-BULK YC2455 YC2455-BULK YC2470 YC2470-BULK YC2470-BULK	357357357357357357357357357357357357357357
YC12100-BULK YC1235 YC1255 YC1255-BULK YC1255CB YC1255UP YC1255UP YC24100 YC24100-BULK YC2455 YC2455 YC2470 YC2470-BULK YC2470-BULK YC2470TS	357357357357357357357357357357357357357357357357357357
YC12100-BULK YC1235 YC1255 YC1255-BULK YC1255CB YC1255UP YC1255UP YC24100 YC24100-BULK YC2455 YC2470 YC2470 YC2470-BULK YC2470TS YC2470TS-BULK YC1210	357357357357357357357357357357357357357357357357357357357
YC12100-BULK YC1235 YC1255 YC1255-BULK YC1255CB YC1255UP YC1255X YC24100 YC24100-BULK YC2455 YC2455-BULK YC2470 YC2470-BULK YC2470-BULK YC2470TS YC2470TS-BULK YL1210 YL1220	357
YC12100-BULK	357
YC12100-BULK YC1235 YC1255 YC1255-BULK YC1255CB YC1255UP YC1255X YC24100 YC24100-BULK YC2455 YC2455 YC2470 YC2470-BULK YC2470-BULK YC2470TS YC1210 YL1210 YL1220 YL125	357
YC12100-BULK YC1235 YC1255 YC1255-BULK YC1255CB YC1255UP YC1255UP YC1255X YC24100 YC24100-BULK YC2455 YC2455-BULK YC2470 YC2470-BULK YC2470TS YC2470TS-BULK YL1210 YL1210 YL125 YL125 YL126 YM1210	357372

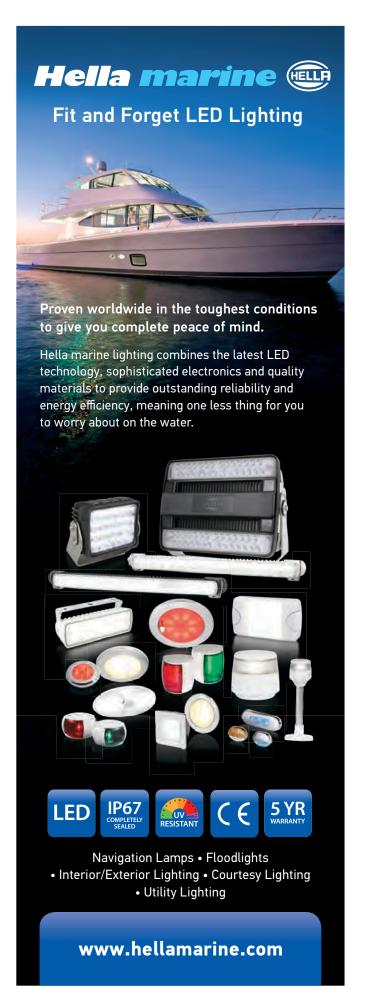

YM2420....



HELLA LED LIGHT BARS

Outstanding light performance & sleek design makes the road legal HELLA LED Light Bars the preferred choice in driving lights.





- → Road legal with ECE approval
- → High performance automotive grade LEDs
- → Light weight thermal conductive plastic housing
- → Impact and UV resistant lens
- → Highly adaptable mounting system
- → 5 year warranty